



Preliminary 2013 MY OBD System Operation Summary for Plug In and Hybrid Electric Vehicles

Table of Contents

Introduction Hybrid Electric Vehicles.....	5
HEV Powertrain Description.....	5
Benefits of Hybrid Electric Vehicles	6
Key Powertrain Components	6
Engine	6
Inverter Control Module (ISC)	6
Transaxle.....	7
Battery	7
Propulsion Modes	8
Series Mode.....	8
Positive Split Mode	8
Negative Split Mode.....	8
Electric Mode	9
City & Highway Traffic Scenarios.....	9
PHEV On Board Charger	10
Hybrid Electric Vehicle Control System	13
Catalyst Efficiency Monitor.....	15
Misfire Monitor.....	22

Low Data Rate System.....	22
Generic Misfire Algorithm Processing	22
Profile Correction	23
EVAP System Monitor - Overview	27
Evap Monitor Overview	27
Fuel Systems Hardware – Sealed (PHEV) vs non-Sealed (HEV).....	30
EVAP System Monitor – Engine Running Diagnostics.....	31
EVAP System Monitor – Engine Off Diagnostics.....	36
ELCM Leak Detection 0.020" Monitor Entry Conditions.....	36
EVAP System Monitor Engine Off Component Checks	41
PHEV Re-Fueling System.....	49
Fuel System Monitor	54
FAOSC (Rear Fuel Trim) Monitor	60
Air Fuel Ratio Imbalance Monitor.....	62
Front UEGO Monitor	65
Front UEGO Signal.....	65
Front UEGO Slow/Delayed Response Monitor (2010 MY and beyond)	73
UEGO Heaters.....	76
Rear HO2S Monitor	79
Rear HO2S Signal	79
Rear HO2S Decel Fuel Shut Off Response Test	82
EWMA Fault Filtering.....	85
Rear HO2S Heaters,	88
Stepper Motor EGR System Monitor	90
PCV System Monitor.....	95
Enhanced Thermostat Monitor	96
HEV/PHEV Cooling System Diagnostics.....	98
Cold Start Emission Reduction Component Monitor	102
Cold Start Emission Reduction System Monitor	105
Variable Cam Timing System Monitor	108

Electronic Throttle Control.....	112
Transmission Range Sensor Inputs	115
Accelerator and Throttle Position Sensor Inputs.....	116
Electronic Throttle Monitor.....	118
Throttle Plate Position Controller (TPPC) Outputs.....	119
Comprehensive Component Monitor - Engine	120
Engine Temperature Sensor Inputs.....	120
IAT Rationality Test.....	123
Throttle Position Sensor	125
Mass Air Flow Sensor.....	125
MAF/TP Rationality Test	126
Miscellaneous CPU Tests	127
Ignition	129
Engine Outputs	132
Mechanical Returnless Fuel System (MRFS) — Dual Speed	133
Battery and Battery Charging Systems.....	135
Low Voltage Battery Charging System - Overview.....	135
High Voltage Battery Charging System - Overview.....	136
High Voltage Battery - Overview.....	142
Powersplit Transaxle	151
Transmission Control System Architecture	151
Transmission Inputs.....	151
HPCM Outputs.....	152
Hybrid Powertrain Control Module (HPCM)	152
Hybrid Powertrain Control Module	153
Hybrid Powertrain Control Module (HPCM) External Inputs.....	153
Transmission Range Sensor Inputs	168
Transmission Auxiliary Oil Pump	169
PCM On Board Diagnostic Executive	174
Exponentially Weighted Moving Average	176

I/M Readiness Code..... 178
Catalyst Temperature Model 179
Serial Data Link MIL Illumination 179

Introduction Hybrid Electric Vehicles

HEV Powertrain Description



A hybrid electric vehicle is powered by a conventional engine with an electric motor added for enhanced fuel economy and reduced emissions. The electric motor can also be used to boost power and enhance performance (like an extra "charge"). This type of vehicle is well suited for the environmentally aware driver who wants better fuel economy and fewer pollutants, but doesn't want the hassle of plug-ins.

A vehicle can be "more" of a hybrid than another. There are various levels of "hybridization," mild, full, and plug-in.

With all HEV variants, the engine turns off when it is not needed, reducing fuel waste, and instantly restarts when the need for power is detected. In addition, all hybrids provide electric assist, in that the combustion engine gets a boost of electric power from the battery pack. This provides additional acceleration performance when needed, without additional use of fuel. The main difference between the HEV variants is in the relative sizing of the electric powertrain to the combustion powertrain.

A mild hybrid has a relatively small electric motor to provide traction power and a small capacity battery. It is designed to provide a start-stop function along with a small amount of acceleration power (used to assist the combustion engine) and a small amount of regenerative braking (meaning vehicle energy that would otherwise would be wasted, is collected during braking to recharge the battery).

A full hybrid provides the same functions as a mild hybrid, but to a larger degree. Since it uses a larger electric motor and battery, it can provide greater amount of acceleration and regenerative braking power. In addition, a full hybrid provides an electric launch, whereby the electric motor can accelerate the vehicle without the combustion engine for small distances. The electric motor can be used to accelerate by itself (in pure electric mode) or in combination with the internal combustion engine (for greater power).

Plug-In hybrids have all of the functions and capabilities of a full hybrid, however, they use a larger battery which gives them greater electric-only driving range. In addition, plug-in hybrids have a charge port which can be used to charge the battery externally from electric mains to allow them to have full electric range without having to run the combustion engine.

Benefits of Hybrid Electric Vehicles

- Reduces emissions by increasing average engine efficiency.
- Engine shuts down, when the vehicle is stopped.
- Electric motor boosts acceleration performance.
- Regenerative brakes recapture energy, to recharge the battery.
- Improved fuel economy stretches a tank of gas further, saves you money, and helps you conserve our limited petroleum resources.
- Driving performance is optimized because both the gas engine and electric motor are working for you.
- No battery plug-ins required for mild and full hybrids, and optional for plug-in hybrid.
- An HEV offers all the conveniences of conventional vehicles: spacious seating, storage room, creature comforts, and extended driving range.
- All Ford/Lincoln hybrids will be delivered, sold, and serviced at local Ford and Lincoln dealers.

Key Powertrain Components


Engine

- I-4 Gasoline Engine
- Electronic Throttle Control
- Atkinson Cycle to improve efficiency by reducing pumping losses
 - For Otto Cycle, expansion ratio equals compression ratio
 - Atkinson Cycle expansion ratio greater than compression ratio
- Leaves intake valve open longer during compression stroke pushing air back into intake manifold
- Operates with less vacuum and greater throttle opening to maintain air charge




Inverter Control Module (ISC)

- Main hybrid control module
- Vehicle energy management functions
- Low level motor & gen control electronics and software
- Power electronics (motor and generator)
- Voltage boost converter
- Integrated heat exchanger
- Chassis mounted

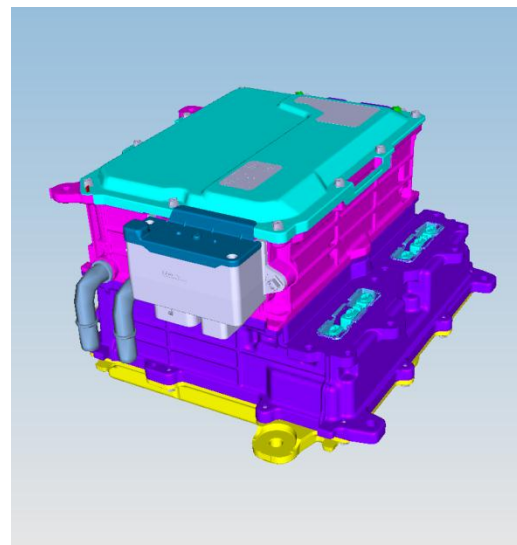


Transaxle

- 64 kW Permanent Magnet AC Generator Motor
- 88 kW Permanent Magnet AC Traction Motor
- Connected to ISC by 3-phase cables for each motor
- Planetary gear set and final drive gears
- Connected to front 2-wheel or all-wheel driveline

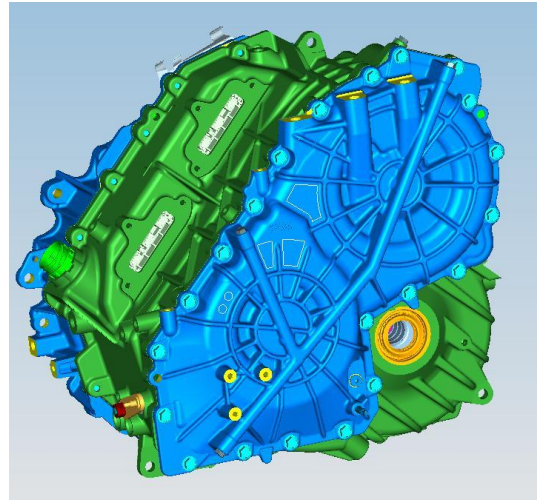

Battery


- Lithium-Ion battery chemistry
- Nearly twice the power density of previous model
- 35 kW power rating (new)

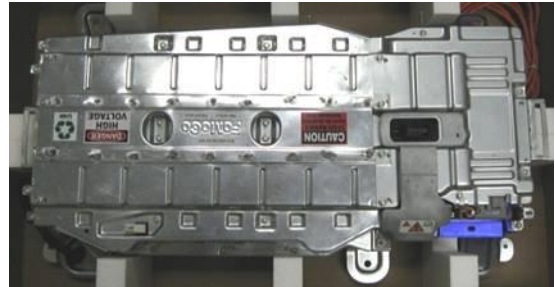

Propulsion Modes


Series Mode

- Used only when vehicle is not moving and the engine is running
- Engine may be running for battery charging, cabin or battery temperature control, or catalyst warm-up.

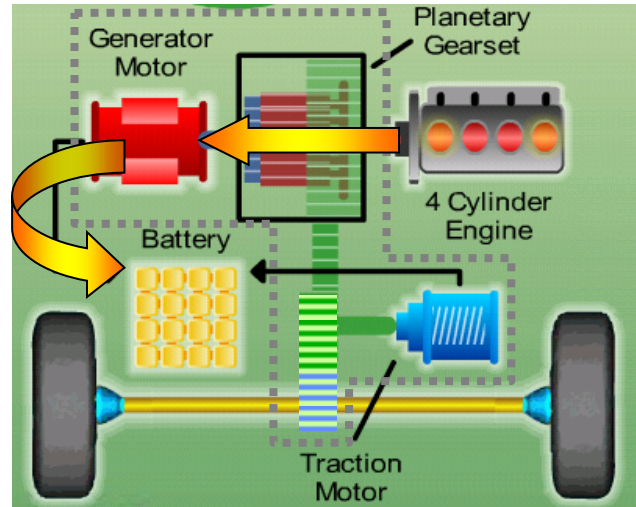


Positive Split Mode

- Engine is ON and driving the generator motor to produce electricity
- Power from the engine is split between the direct path to the road and the path through the generator motor
- Generator power can flow to the battery or to the traction motor
- The traction motor can operate as a motor or a generator to make up the difference between the engine power and the desired power
- This is the preferred mode whenever the battery needs to be charged or when at moderate loads and low vehicle speeds

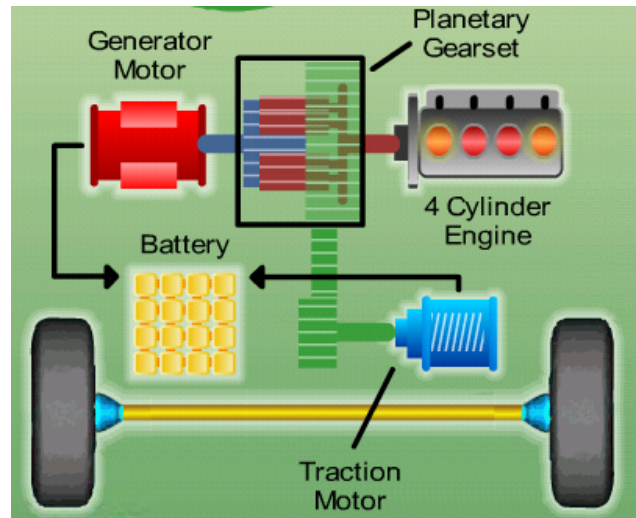


Negative Split Mode

- The engine is on and the generator motor consumes electrical energy to reduce engine speed
- The traction motor can operate as a motor or a generator to make up the difference between the engine power and the desired power
- Typical highway mode
- Occurs when the engine needs to be on, the system can not be operated in parallel mode and the battery is charged near its upper limit

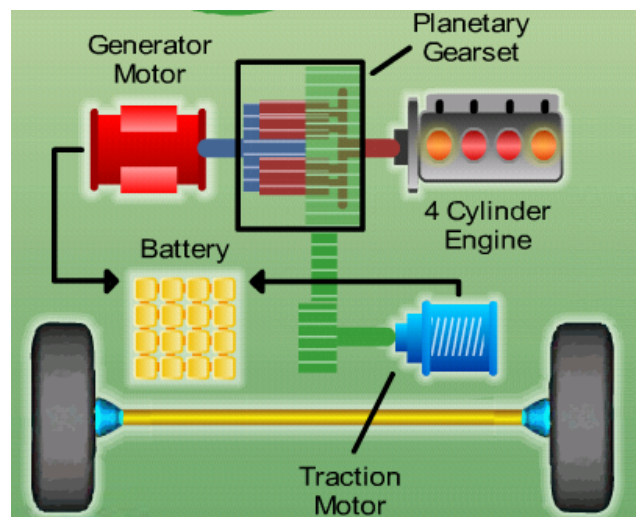

Electric Mode

- The vehicle is propelled by stored electrical energy only
- The engine is turned off
- The tractive torque supplied from the traction motor
- Preferred mode whenever the desired power is low enough such that it can be produced more efficiently by electrical system than engine
- Preferred mode in reverse because the engine can not deliver reverse torque
- Separate electric pump maintains power assisted steering

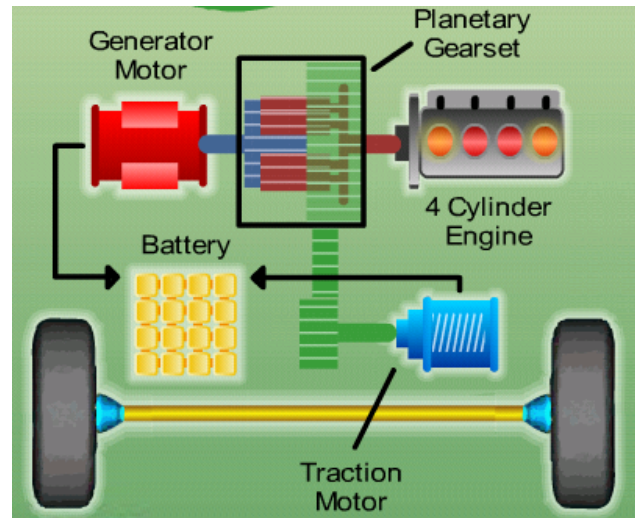

City & Highway Traffic Scenarios

Stopped

- The engine will be off unless it needs to be on for reasons other than tractive power (Max A/C, vacuum, catalyst temp, heat, purge, low SOC)

Launching

- At low speed or low power demand, the launch mode will be electric, unless the engine needs to be on for other reasons.
- At moderate speed or high desired power, the engine will come on.

Entering highway or Passing

- At high acceleration demand, the engine power will be boosted with battery power through the traction motor to provide quick V-6 like response.

Cruising

- At light load, the system may operate in parallel, positive split or negative split mode depending on the battery charge.
- At heavy load (due to high speeds, weight, towing or grade), the system will be limited to engine only performance (no battery support).
- Limited regenerative braking will be used.

Exiting highway

- Provides an opportunity for regenerative braking.

Braking

- At high speed, the engine torque is ramped down, the traction motor regenerates to a limit and the foundation brakes are applied as necessary (at the traction motor or battery regen limits).
- At moderate and low speed, the engine will be turned off.

PHEV On Board Charger

Charge Fault HMI (Human Machine Interface) On the Vehicle

Vehicle Interior

- Cluster - Upon a charger fault, the BCCM and BECM can request the P/T malfunction indicator on the instrument cluster (amber wrench light). No specific message to point to the charge system which is similar to other onboard requests for this telltale.
- 8" Centerstack Screen - A charging fault message will be displayed in 8" centerstack.

Vehicle Exterior

The vehicle will have a light ring around the charge port located on the driver's fender. Upon a charge fault, all segments of the light ring will flash rapidly for 20-30 minutes.



Lighted ring indicates fault and state of charge



Ring illuminates in 4 segments representing 25% increments of battery state of charge

Charge Fault HMI Near the Vehicle

120V Convenience Cord

The convenience cord includes a CCID box with HMI display. A triangle with a (!) LED in the center indicates the following fault conditions:

- CCID self test failure
- CCID microprocessor failure
- GFCI final fault
- Over current protection “final” fault



240V Wall Mount Charger

Red LED light illuminates indicating fault conditions. LED blinks unique codes depending on fault:

- Vehicle fault – 1x / 2 sec
- Contactor fault – 1x / 1 sec
- CCID fault – 2x / 1 sec
- Ground missing – 10x / 1 sec
- Failed internal self test – on steady



Charge Fault HMI Remote from the Vehicle

MyFord Mobile App

Standard feature allowing cellular communication between vehicle and cell phone/computer

New vehicle purchase includes pre-paid 5 year subscription (renewable)

Upon charge fault, automatic alerts will be sent to the owner's cell phone and/or computer via text/email message.

The following reasons will trigger an alert:


- Charging Fault (during charging only)
- Scheduled Charge Not Occurring
- Accidental Unplug - if charger is unplugged and vehicle not driven within 15 minutes

Upon request by owner, MyFord Mobile App also sends vehicle reports containing other information that could point to a charging fault:

- Charge status, including: generic fault (not known if in the car or out of the car), fault inside car, fault outside car, charge in progress, charge scheduled, and charge complete
- Plug status
- Battery health – if BECM not requesting telltale, health is ok



Ford HEV Powertrain Control System

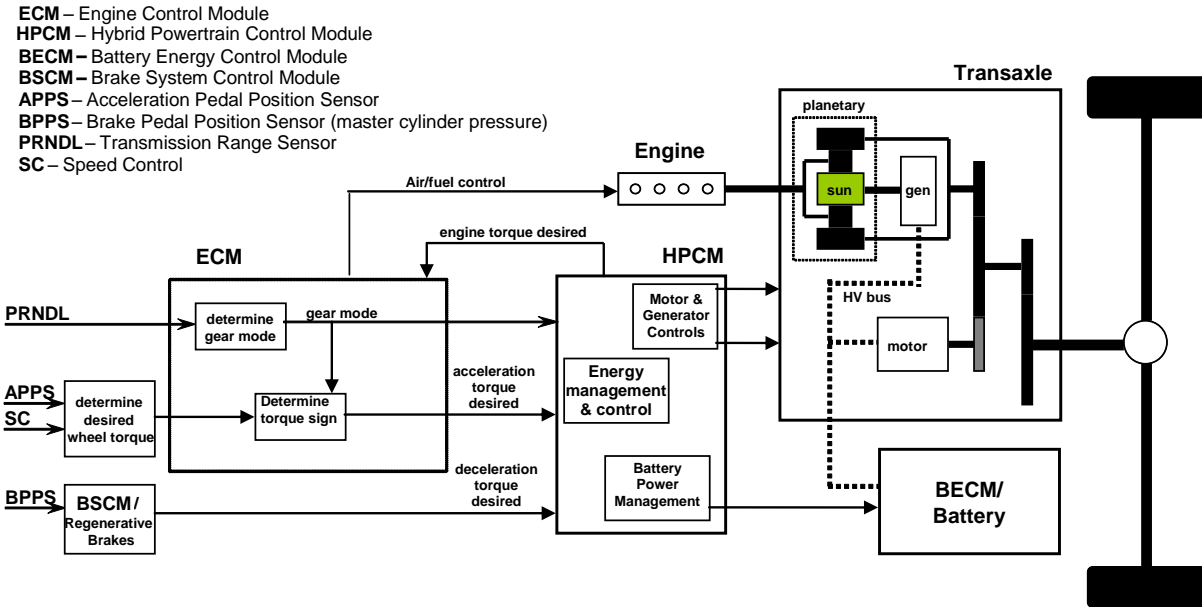

The Hybrid Electric Vehicle Control System uses four modules to control hybrid electric powertrain functions:

The Engine Control Module (ECM) monitors driver inputs and controls engine related functions.

The Hybrid Powertrain Control Module (HPCM) interprets driver inputs and controls energy management and generator and motor functions.

The Battery Energy Control Module (BECM) controls the high voltage battery pack.

The Brake System Control Module (BSCM) monitors driver braking requests and controls the braking functions.

All these modules use CAN communication for all diagnostic functions and normal-mode communications.

The ECM is a stand-alone OBD-II control module and meets all J1979 requirements. These include generic DIDs, freeze frame storage, pending and confirmed DTC retrieval and clearing, Mode 06 test data, Mode 08 evap system test, Mode 09 VIN, CALID and CVN, and Mode 0A Permanent DTCs. The OBD-II monitors for the engine are similar to the monitors used by a conventional gasoline vehicle. The basic difference between a conventional gasoline engine and the hybrid engine is that the engine often shuts down while in electric mode. This sometimes requires active intervention by the diagnostic executive to ensure that all OBD-II monitor can complete.

The HPCM is a stand-alone OBD-II control module and meets all J1979 requirements. These include generic DIDs, freeze frame storage, pending and confirmed DTC retrieval and clearing, and Mode 09 CALID and CVN, and Mode 0A Permanent DTCs. Some of the OBD-II monitors for hybrid system are similar to the monitors used by a conventional transmission; however, many of the monitors are unique to the hybrid generator and motor sensors and controls. The HPCM is housed within the Inverter Control System (ISC) models, and is not serviceable with the exception of reflashing memory.

The Battery Energy Control Module (BECM) is a stand-alone OBD-II control module and meets all J1979 requirements. These include generic PIDs, freeze frame storage, pending and confirmed DTC retrieval and clearing, and Mode 09 CALID and CVN. The BECM is housed within the battery pack and is not serviceable with the exception of reflashing memory. As a result, the BECM supports J1979 Mode 09 CALID and CVN.

The Brake System Control Module (BSCM) is not an OBD-II control module because there are no regenerative braking faults that affect emissions.

Catalyst Efficiency Monitor

The Catalyst Efficiency Monitor uses an oxygen sensor after the catalyst to infer the hydrocarbon efficiency based on oxygen storage capacity of the ceria and precious metals in the washcoat. Under normal, closed-loop fuel conditions, high efficiency catalysts have significant oxygen storage. This makes the switching frequency of the rear HO2S very slow and reduces the amplitude. As catalyst efficiency deteriorates due to thermal and/or chemical deterioration, its ability to store oxygen declines and the post-catalyst HO2S signal begins to switch more rapidly with increasing amplitude. The predominant failure mode for high mileage catalysts is chemical deterioration (phosphorus deposition on the front brick of the catalyst), not thermal deterioration.

Integrated Air/Fuel Method

The Integrated Air/Fuel Catalyst Monitor assesses the oxygen storage capacity of a catalyst after a fuel cut event. The monitor integrates how much excess fuel is needed to drive the monitored catalyst to a rich condition starting from an oxygen-saturated, lean condition. Therefore, the monitor is a measure of how much fuel is required to force catalyst breakthrough from lean to rich. To accomplish this, the monitor runs during fuel reactivation following a Decel Fuel Shut Off (DFSO) event. The monitor completes after a calibrated number of DFSO monitoring events have occurred. The IAF catalyst monitor can be used with either a wide range O2 sensor (UEGO) or a conventional switching sensor (HEGO).


Functionally, the equation is:

$$IAF = \int \left(\frac{Fuel_needed_for_stoich}{Fuel_Measured} - Fuel_needed_for_stoich \right)$$


where the units are in pounds mass of fuel.

The monitor runs during reactivation fueling following an injector cut. The diagram below shows examples of one DFSO event with a threshold catalyst and with a Full Useful Life catalyst where:

- INJON = # of injectors on.
- CMS is the catalyst monitor sensor voltage. When the rear O2 sensor crosses 0.45 volts (i.e. rich) the monitor will complete for the given DFSO event.
- LAM (LAMBDA) is the front O2 sensor (UEGO) signal.
- CATMN_IAF_SUM is the integral from the equations above (Y axis on the right).

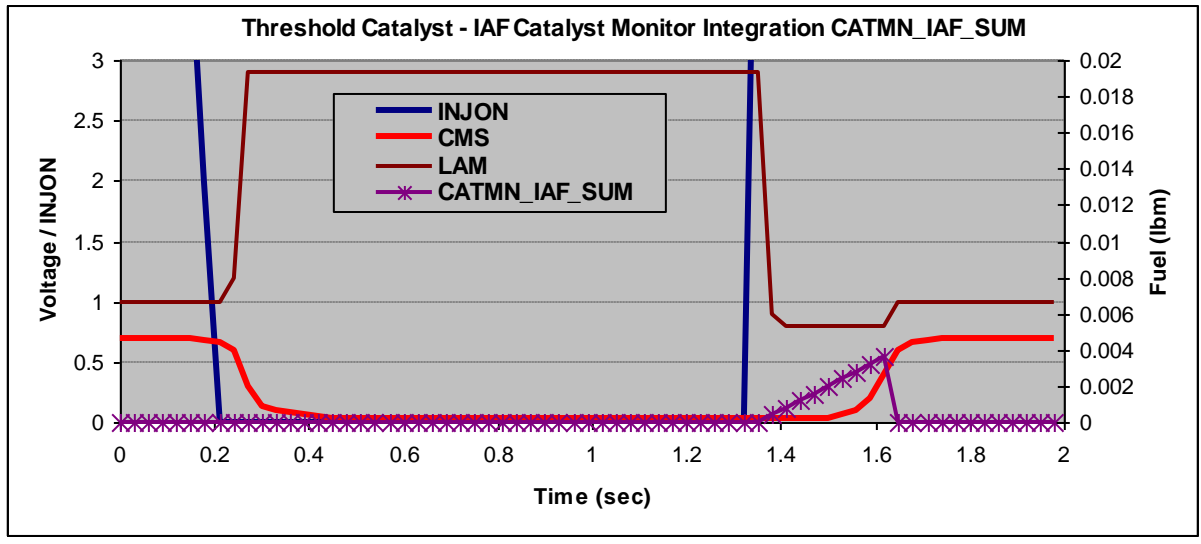

In this example, CATMN_IAF_SUM is small because it doesn't take much fuel to break through a low oxygen storage threshold catalyst.

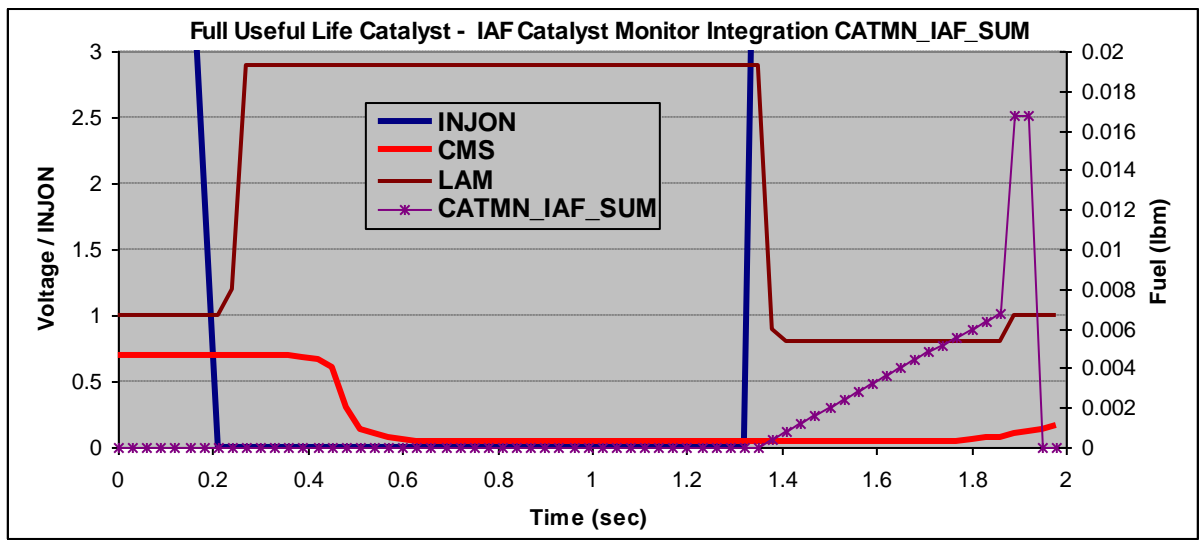

In this example, CATMN_IAF_SUM is much larger because it takes a substantial amount of fuel to break through a high oxygen storage threshold catalyst.

There are two sets of entry conditions into the IAF catalyst monitor. The high level entry conditions determine that the monitor would like to run following the next injector fuel cut event. The lower level entry conditions determine that the fuel cut-off event was suitable for monitoring and the monitor will run as soon as the injectors come back on.

1. The high level entry conditions are met when:

- There are no sensor/hardware faults
- The base monitor entry conditions have been met (ECT, IAT, cat temp, fuel level, air mass)
- Required number of DFSSO monitoring event have not yet completed

2. The lower level entry conditions are met when:

- The injectors are off
- The catalyst is believed to be saturated with oxygen (rear O2 indicates lean)
- The catalyst/rear O2 has been rich at least once since the last monitor event.

General Catalyst Monitor Operation

Rear HO2S sensors can be located in various ways to monitor different kinds of exhaust systems. In-line engines and many V-engines are monitored by individual bank. A rear HO2S sensor is used along with the front, fuel-control HO2S sensor for each bank. Two sensors are used on an in-line engine; four sensors are used on a V-engine. Some V-engines have exhaust banks that combine into a single underbody catalyst. These systems are referred to as Y-pipe systems. They use only one rear HO2S sensor along with the two front, fuel-control HO2S sensors. Y-pipe system use three sensors in all. For Y-pipe systems which utilize switching front O2 sensors, the two front HO2S sensor signals are combined by the software to infer what the HO2S signal would have been in front of the monitored catalyst. The inferred front HO2S signal and the actual single, rear HO2S signal is then used to calculate the switch ratio.

Many vehicles monitor less than 100% of the catalyst volume – often the first catalyst brick of the catalyst system. Partial volume monitoring is done on LEV-II vehicles in order to meet the 1.75 * emission-standard threshold for NMHC and NOx. The rationale for this practice is that the catalysts nearest the engine deteriorate first, allowing the catalyst monitor to be more sensitive and illuminate the MIL properly at lower emission standards.

Many applications that utilize partial-volume monitoring place the rear HO2S sensor after the first light-off catalyst can or, after the second catalyst can in a three-can per bank system. (A few applications placed the HO2S in the middle of the catalyst can, between the first and second bricks.)

The new Integrated Air/Fuel Catalyst Monitor can be used to monitor the entire catalyst volume, even on LEV-II vehicles.

Index ratios for ethanol (Flex fuel) vehicles vary based on the changing concentration of alcohol in the fuel. The malfunction threshold typically increases as the percent alcohol increases. For example, a malfunction threshold of 0.5 may be used at E10 (10% ethanol) and 0.9 may be used at E85 (85% ethanol). The malfunction thresholds are therefore adjusted based on the % alcohol in the fuel. (Note: Normal gasoline is allowed to contain up to 10% ethanol (E10)).

Vehicles with the Index Ratio Method Using a Switching HO2S Sensor employ an Exponentially Weighted Moving Average (EWMA) algorithm to improve the robustness of the catalyst monitor. During normal customer driving, a malfunction will illuminate the MIL, on average, in 3 to 6 driving cycles. If KAM is reset (battery disconnected) or DTCs are cleared, a malfunction will illuminate the MIL in 2 driving cycles. See the section on EWMA for additional information.

Vehicles with the Index Ratio Method Using a Wide Range HO₂S Sensor (UEGO) or the Integrated Air/Fuel catalyst monitor employ an improved version of the EWMA algorithm.

The EWMA logic incorporates several important CARB requirements. These are:


- Fast Initial Response (FIR): The first 4 tests after a battery disconnect or code clear will process unfiltered data to quickly indicate a fault. The FIR will use a 2-trip MIL. This will help the service technician determine that a fault has been fixed.
- Step-change Logic (SCL): The logic will detect an abrupt change from a no-fault condition to a fault condition. The SCL will be active after the 4th catalyst monitor cycle and will also use a 2-trip MIL. This will illuminate the MIL when a fault is instantaneously induced.
- Normal EWMA (NORM): This is the normal mode of operation and uses an Exponentially Weighted Moving Average (EWMA) to filter the catalyst monitor test data. It is employed after the 4th catalyst test and will illuminate a MIL during the drive cycle where the EWMA value exceeds the fault threshold. (1 trip MIL).

Starting in the 2010 ½ Model Year and later, the catalyst monitor will employ catalyst break-in logic. This logic will prevent the catalyst monitor from running until after a catalyst break-in period.

The catalyst monitor will not run on a new vehicle from the assembly plant until 60 minutes of time above a catalyst temperature (typically 800 to 1100 deg F) has been accumulated or 300 miles has elapsed.

New modules at the assembly plant will have an NVRAM flag initialized to delay the catalyst monitor. Service modules and re-flash software will have the flag set to allow that catalyst monitor to run. The flag cannot be reset to delay the catalyst monitor from running by any tool or service procedure.

Integrated Air Fuel Catalyst Monitor

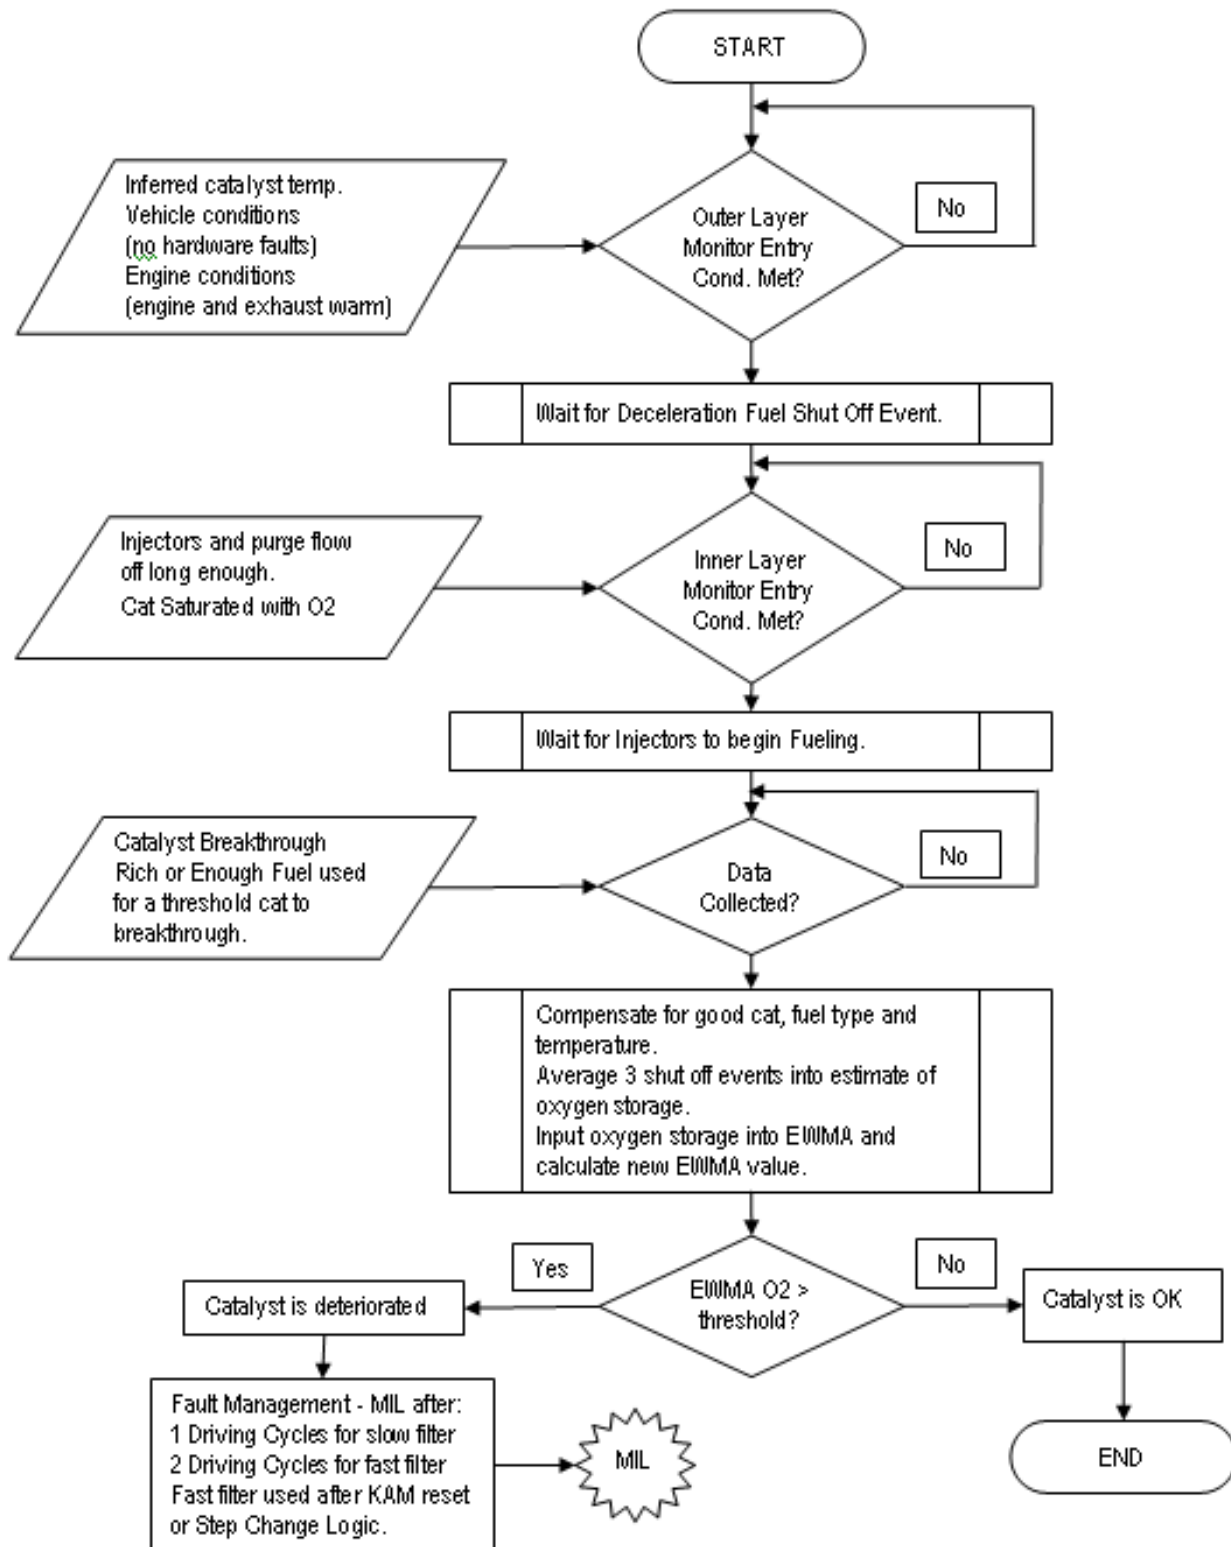

CATALYST MONITOR OPERATION:	
DTCs	P0420 Bank 1
Monitor execution	once per driving cycle
Monitor Sequence	HO2S response test complete and no DTCs (P0133/P0153) prior to calculating switch ratio, no SAIR pump stuck on DTCs (P0412/P1414), no evap leak check DTCs (P0442/P0456), no EGR stuck open DTCs (P0402)
Sensors OK	ECT, IAT, TP, VSS, CKP, MAF, no misfire DTCs (P0300, P0310), no ignition coil DTCs (P0351-P0358), no fuel monitor DTCs (P0171, P0172, P0174, P0175), no VCT DTCs (P0010-P0017, P052A, P052B, P0344, P0365, P0369-bank1) (P0018 thru P0025,P052C, P052D, P0349, P0390, P0394- bank2).no evap system DTCs (P0443, P0446, P0455, P0457, P1450), no ETC system DTCs (P0122, P0123, P0222, P0223, P02135) (P2101, P2107, P2111, P2112) (P0600, P060A, P060B, P060C, P061B, P061C, P061D, P1674, U0300).
Monitoring Duration	Approximately 700 seconds during appropriate FTP conditions (approximately 100 to 200 oxygen sensor switches are collected) for switching O2 control sensors Approximately 10 to 20 seconds for wide range O2 index ratio monitor. 3 Decel Fuel Cutoff events for IAF catalyst monitor

TYPICAL IAF CATALYST MONITOR ENTRY CONDITIONS:		
Entry condition	Minimum	Maximum
Engine Coolant Temp	125 °F	220 °F
Intake Air Temp	20 °F	140 °F
Inferred catalyst mid-bed temperature	800 °F	1590 °F
Fuel Level	15%	
Air Mass		4.0 lb/min
Minimum inferred rear O2 sensor temperature	800 °F	
Fuel monitor learned within limits	98%	102%
Rear O2 sensor rich since last monitor attempt	0.45 volts	
Rear O2 sensor lean with injectors off (voltage needed to enter monitor)		0.1 volts
Rear O2 sensor reads rich after fuel turned back on (voltage needed to complete monitor)	0.45 volts	

TYPICAL MALFUNCTION THRESHOLDS:
Catalyst monitor index ratio > 0.75 (bank monitor)

Mode \$06 reporting for IAF Catalyst Monitor

The catalyst monitor results are converted to a ratio for Mode \$06 reporting to keep the same look and feel for the service technician. The equation for calculating the Mode \$06 monitor result is:

$$1 - (\text{Actual reactivation fuel} / \text{Good catalyst reactivation fuel})$$

Good catalyst reactivation fuel is intended to represent what the monitor would measure for a green catalyst.

J1979 CATALYST MONITOR MODE \$06 DATA			
Monitor ID	Test ID	Description for CAN	
\$21	\$80	Bank 1 index-ratio and max. limit	unitless

** NOTE: In this document, a monitor or sensor is considered OK if there are no DTCs stored for that component or system at the time the monitor is running.

Misfire Monitor

The HEV uses the Low Data Rate misfire monitor. The LDR system is capable of meeting “full-range” misfire monitoring requirements on 4-cylinder engines. The software allows for detection of any misfires that occur 6 engine revolutions after initially cranking the engine. This meets the new OBD-II requirement to identify misfires within 2 engine revolutions after exceeding the warm drive, idle rpm.

Low Data Rate System

The LDR Misfire Monitor uses a low-data-rate crankshaft position signal, (i.e. one position reference signal at 10 deg BTDC for each cylinder event). The PCM calculates crankshaft rotational velocity for each cylinder from this crankshaft position signal. The acceleration for each cylinder can then be calculated using successive velocity values. The changes in overall engine rpm are removed by subtracting the median engine acceleration over a complete engine cycle. The crankshaft acceleration is then processed by two algorithms. The first is optimized for detection of sporadic and single cylinder patterns of misfire; the second is optimized for multi-cylinder patterns. The resulting deviant cylinder acceleration values are used in evaluating misfire in the “General Misfire Algorithm Processing” section below.

Generic Misfire Algorithm Processing

The acceleration that a piston undergoes during a normal firing event is directly related to the amount of torque that cylinder produces. The calculated piston/cylinder acceleration value(s) are compared to a misfire threshold that is continuously adjusted based on inferred engine torque. Deviant accelerations exceeding the threshold are conditionally labeled as misfires. A threshold multiplier is used during startup CSER to compensate the thresholds for the reduction in signal amplitude during spark retard conditions.

The calculated deviant acceleration value(s) are also evaluated for noise. Normally, misfire results in a non-symmetrical loss of cylinder acceleration. Mechanical noise, such as rough roads or high rpm/light load conditions, will produce symmetrical, positive acceleration variations. A noise limit is calculated by applying a negative multiplier to the misfire threshold. If the noise limit is exceeded, a noisy signal condition is inferred and the misfire monitor is suspended for a brief interval. Noise-free deviant acceleration exceeding a given threshold is labeled a misfire.

The number of misfires is counted over a continuous 200 revolution and 1000 revolution period. (The revolution counters are not reset if the misfire monitor is temporarily disabled such as for negative torque mode, etc.) At the end of the evaluation period, the total misfire rate and the misfire rate for each individual cylinder is computed. The misfire rate evaluated every 200 revolution period (Type A) and compared to a threshold value obtained from an engine speed/load table. This misfire threshold is designed to prevent damage to the catalyst due to sustained excessive temperature (1650°F for Pt/Pd/Rh advanced washcoat and 1800°F for Pd-only high tech washcoat). If the misfire threshold is exceeded and the catalyst temperature model calculates a catalyst mid-bed temperature that exceeds the catalyst damage threshold, the MIL blinks at a 1 Hz rate while the misfire is present. If the misfire occurs again on a subsequent driving cycle, the MIL is illuminated.

If a single cylinder is determined to be consistently misfiring in excess of the catalyst damage criteria, the fuel injector to that cylinder will be shut off for 30 seconds to prevent catalyst damage. Up to two cylinders may be disabled at the same time on 6 and 8 cylinder engines and one cylinder is disabled on 4 cylinder engines. This fuel shut-off feature is used on all engines starting in the 2005 MY. After 30 seconds, the injector is re-enabled. If misfire on that cylinder is again detected after 200 revs (about 5 to 10 seconds), the fuel injector will be shut off again and the process will repeat until the misfire is no longer present. Note that ignition coil primary circuit failures (see CCM section) will trigger the same type of fuel injector disablement.

The misfire rate is also evaluated every 1000 rev period and compared to a single (Type B) threshold value to indicate an emission-threshold malfunction, which can be either a single 1000 rev exceedence from startup or four subsequent 1000 rev exceedences on a drive cycle after start-up. Some vehicles will set a P0316 DTC if the Type B malfunction threshold is exceeded during the first 1,000 revs after engine startup. This DTC is normally stored in addition to the normal P03xx DTC that indicates the misfiring cylinder(s). If misfire is detected but cannot be

attributed to a specific cylinder, a P0300 is stored. This may occur on some vehicles at higher engine speeds, for example, above 3,500 rpm.

Profile Correction

"Profile correction" software is used to "learn" and correct for mechanical inaccuracies in the crankshaft position wheel tooth spacing. Since the sum of all the angles between crankshaft teeth must equal 360°, a correction factor can be calculated for each misfire sample interval that makes all the angles between individual teeth equal. . The LDR misfire system will learn one profile correction factor per cylinder (ex. 4 correction factors for a 4 cylinder engine), while the HDR system will learn 36 or 40 correction factors depending on the number of crankshaft wheel teeth (ex. 36 for V6/V8 engines, 40 for V10 engines).

The corrections are calculated from several engine cycles of misfire sample interval data. The "mature" correction factors are the average of a selected number of samples. In order to assure the accuracy of these corrections, a tolerance is placed on the incoming values such that an individual correction factor must be repeatable within the tolerance during learning. This is to reduce the possibility of learning corrections on rough road conditions which could limit misfire detection capability and to help isolate misfire diagnoses from other crankshaft velocity disturbances.

To prevent any fueling or combustion differences from affecting the correction factors, learning is done during decel-fuel cutout. This can be done during closed-throttle, non-braking, de-fueled decelerations in the 60 to 40 mph range after exceeding 60 mph (likely to correspond to a freeway exit condition). In order to minimize the learning time for the correction factors, a more aggressive decel-fuel cutout strategy may be employed when the conditions for learning are present and are typically learned in a single 60 to 40 MPH deceleration, but can be learned during up to 3 such decelerations, or over a higher number of shorter duration decelerations..

For Hybrid Electric Vehicles profile is learned by using the electric drive to spin the crankshaft on the first engine shutdown during which time profile is calculated.

Since inaccuracies in the wheel tooth spacing can produce a false indication of misfire, the misfire monitor is not active until the corrections are learned. In the event of battery disconnection or loss of Keep Alive Memory the correction factors are lost and must be relearned. If the software is unable to learn a profile after three 60 to 40 mph decels, or for HEV's after 6 failed attempts to learn, a P0315 DTC is set.


Neutral Profile Correction and Non-Volatile Memory

Neutral profile learning is used at End of Line to learn profile correction via a series of one or more neutral engine rpm throttle snaps. This allows the Misfire Monitor to be activated at the Assembly Plant. A Test Tool command is required to enable this method of learning, so this method will only be performed by a Plant or Service technician. Learning profile correction factors at high-speed (3,000 rpm) neutral conditions versus during 60-40 mph decels optimizes correction factors for higher rpms where they are most needed and eliminates driveline/transmission and road noise effects. This improves signal to noise characteristics which means improved detection capability.

The profile correction factors learned at the Assembly Plant are stored into non-volatile memory. This eliminates the need for specific customer drive cycles. However, misfire profiles may need to be relearned in the Service Bay using a service procedure if major engine work is done or the PCM is replaced. (Re-learning is not required for a reflash.)

The engine shutdown profile learning algorithm has been left active in the software as a backup.

Low Data Rate and High Data Rate Systems

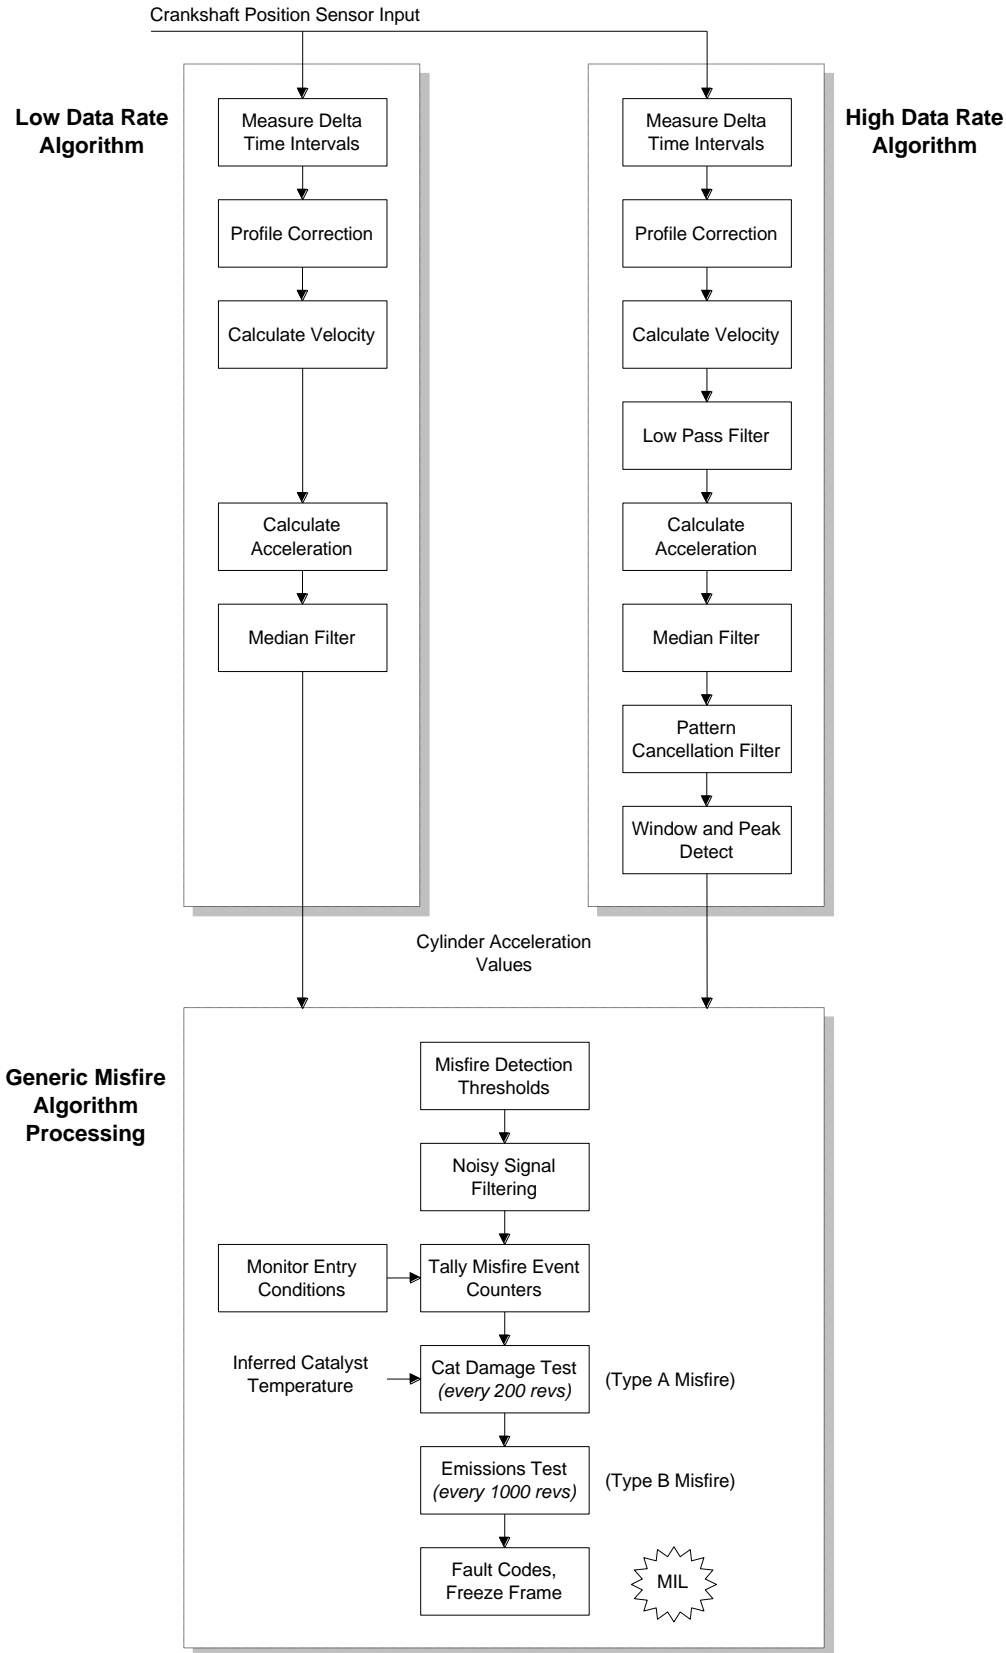

Misfire Monitor Operation:	
DTCs	P0300 to P0304 (general and specific cylinder misfire) P0315 (unable to learn profile) P0316 (misfire during first 1,000 revs after start-up) P1336 (unable to synch CKP and CMP signals)
Monitor execution	Continuous, misfire rate calculated every 200 or 1000 revs
Monitor Sequence	None
Sensors OK	CKP, CMP, MAF, ECT/CHT
Monitoring Duration	Entire driving cycle (see disablement conditions below)

Typical misfire monitor entry conditions:		
Entry condition	Minimum	Maximum
Time since engine start-up	0 seconds	0 seconds
Engine Coolant Temperature	20 °F	250 °F
RPM Range (Full-Range Misfire certified, with 2 rev delay)	2 revs after exceeding 150 rpm below "drive" idle rpm	5900 rpm
Profile correction factors learned in NVRAM	Yes	
Fuel tank level	15%	

Typical misfire temporary disablement conditions:
Temporary disablement conditions:
Closed throttle decel (negative torque, engine being driven) > -100 ft lbs
Fuel shut-off due to vehicle-speed limiting or engine-rpm limiting mode
High rate of change of torque (heavy throttle tip-in or tip out) > -1024 deg/sec or 1023 deg/sec; > -200 ft lbs/sec or > 200 ft lbs/sec

Typical misfire monitor malfunction thresholds:
Type A (catalyst damaging misfire rate): misfire rate is an rpm/load table ranging from 20% at idle to 5% at high rpm and loads
Type B (emission threshold rate): 0.89%

J1979 Misfire Mode \$06 Data

Monitor ID	Test ID	Description for CAN	
A1	\$80	Total engine misfire and catalyst damage misfire rate (updated every 200 revolutions)	percent
A1	\$81	Total engine misfire and emission threshold misfire rate (updated every 1,000 revolutions)	percent
A1	\$82	Highest catalyst-damage misfire and catalyst damage threshold misfire rate (updated when DTC set or clears)	percent
A1	\$83	Highest emission-threshold misfire and emission threshold misfire rate (updated when DTC set or clears)	percent
A1	\$84	Inferred catalyst mid-bed temperature	°C
A2 – AD	\$0B	EWMA misfire counts for last 10 driving cycles	events
A2 – AD	\$0C	Misfire counts for last/current driving cycle	events
A2 – AD	\$80	Cylinder X misfire rate and catalyst damage misfire rate (updated every 200 revolutions)	percent
A2 – AD	\$81	Cylinder X misfire rate and emission threshold misfire rate (updated every 1,000 revolutions)	percent

EVAP System Monitor - Overview


Evap Monitor Overview

For 2013 MY, a new family of Hybrid Electric Vehicles (HEV) will be introduced. Some of these vehicles will be able to charge the battery by plugging the vehicle into the grid as well as using an engine –driven generator and regenerative brakes to charge the battery while driving (Plug in Hybrid Electric Vehicles (PHEV)); others will only be using an engine –driven generator and regenerative brakes to charge the battery while driving (Hybrid Electric Vehicles (HEV)). For both types of vehicle, depending on the vehicle drive cycle, there could be very little or no engine operation during the driving cycle. This poses a challenge as historically, evaporative system leak diagnostics has relied on engine vacuum to evacuate the fuel tank and perform a large portion of the leak check and purge flow diagnostics. Additionally, the Engine Off Natural Vacuum (EONV) test that runs after key off relies on a exhaust system to heat up underbody components and reject heat into the fuel tank. It is the cooling of the fuel in the tank that generates the vacuum that enables to EONV test to perform the 0.020" leak check. If the engine does not run, both of the current engine-running and engine –off evap system diagnostics are not feasible.


In spite of this, the OBD-II regulations still require manufacturers to monitor the evaporative system for leaks and to perform a functional purge flow check. One solution is to add a vacuum pump that can generate vacuum on demand to facilitate the evaporative system diagnostics. The system that is being used is manufactured by the Denso Corporation and is called Evaporative Leak Check Module (ELCM).




The ELCM consists of a vacuum pump, an absolute pressure sensor, a 0.020" reference orifice and a change-over valve (COV). The 0.020" reference orifice is used to obtain a 0.020" reference every time the monitor is run. This reference check becomes the threshold for passing or failing a 0.020" leak. Since the threshold is dynamically established at the beginning of the test, many of the noise/control factors (e.g. fuel level, ambient temperature, barometric pressure) are accounted for. The ELCM system is illustrated below:

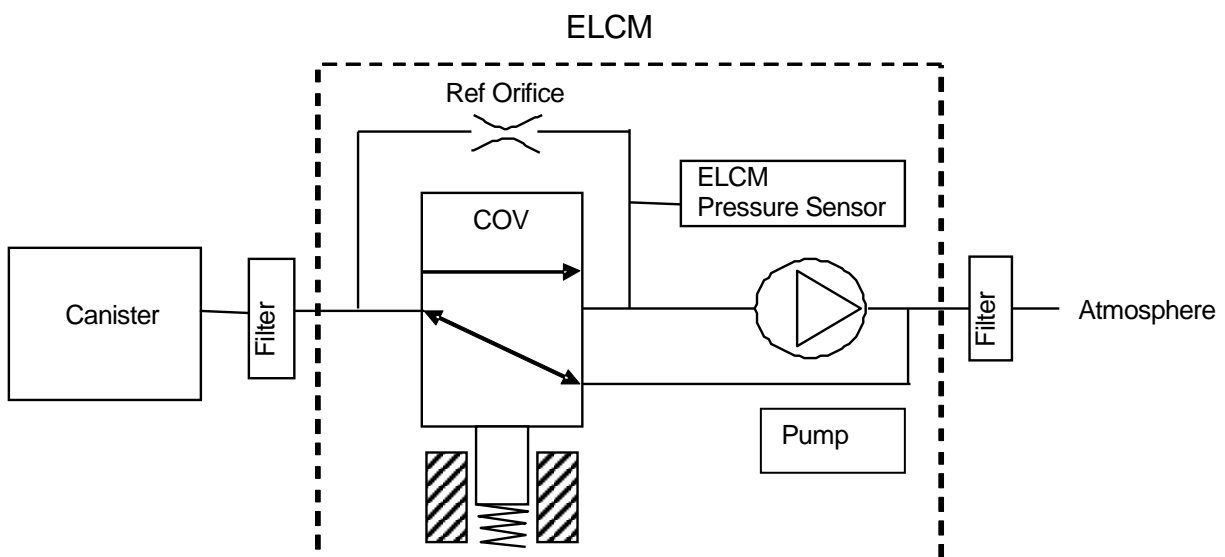


During normal operation, the ELCM is vented to atmosphere through the COV. This allows for purging during engine operation as well as fuel fill. During ELCM leak detection execution, the vacuum pump is turned on. With the pump on, vacuum is drawn across the reference orifice and the ensuing vacuum level becomes the threshold for pass/fail criteria. Once the reference is established, it is time to perform the actual leak testing. This is accomplished by energizing the COV and turning on the vacuum pump. Depending on the volume of the evaporative system being evacuated, it could take anywhere from 2 to 15 minutes for the vacuum level to saturate. Once saturation vacuum is reached, the vacuum level is compared against the vacuum level when the reference check was performed. Vacuum levels lower than the reference check are considered to be fails and vacuum levels above the reference check are considered to be passes. The diagrams below illustrate this.

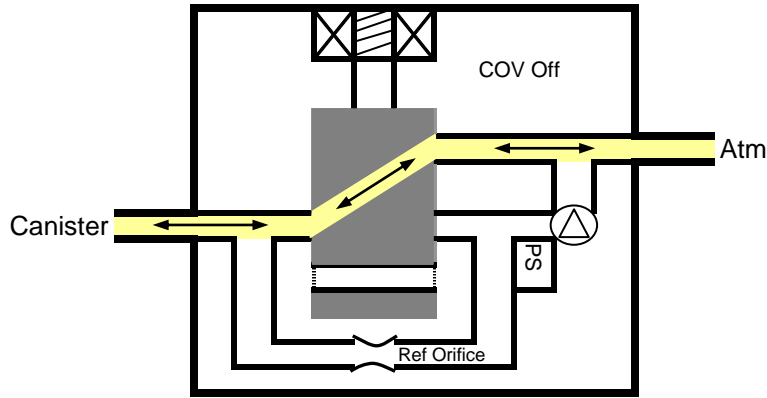

Typical purge flow/fuel fill configuration. Yellow denotes the vacuum/pressure path.

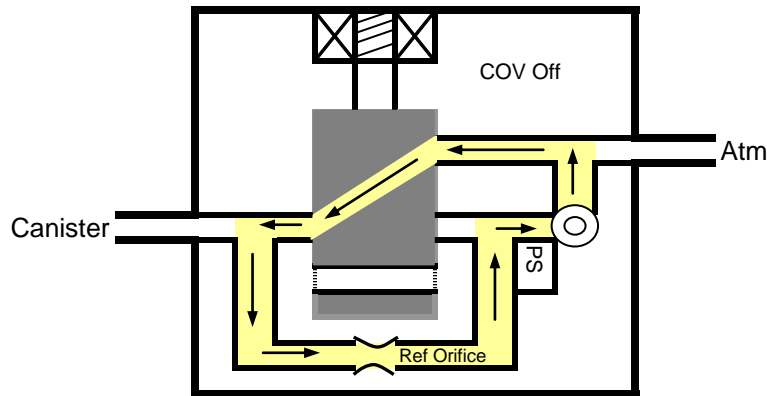


Typical reference check configuration (Pump ON). Yellow denotes the vacuum path.

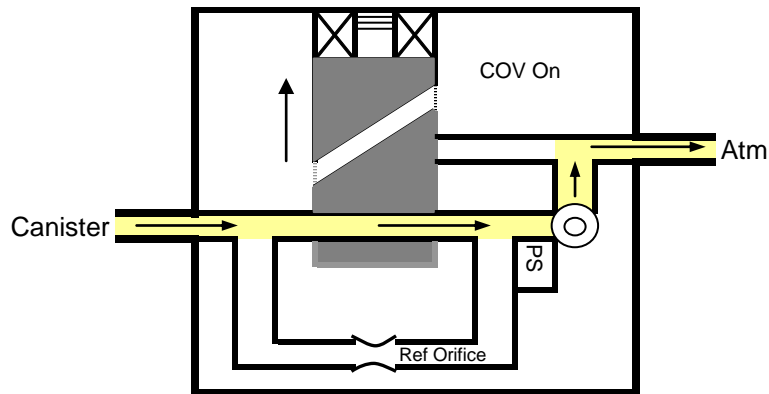


Typical system leak check configuration (Pump On, COV On). Yellow denotes the vacuum path.

Below is a typical plot of a test sequence. First, a reference check is obtained. The system is then relieved back to atmosphere before the COV is energized and the pump is turned on again. If the resulting vacuum signal crosses below the reference check line, then the system is deemed to be leak-free. If the vacuum signal "flat lines" above the reference check line, then the system is determined to have a leak > 0.020 ".

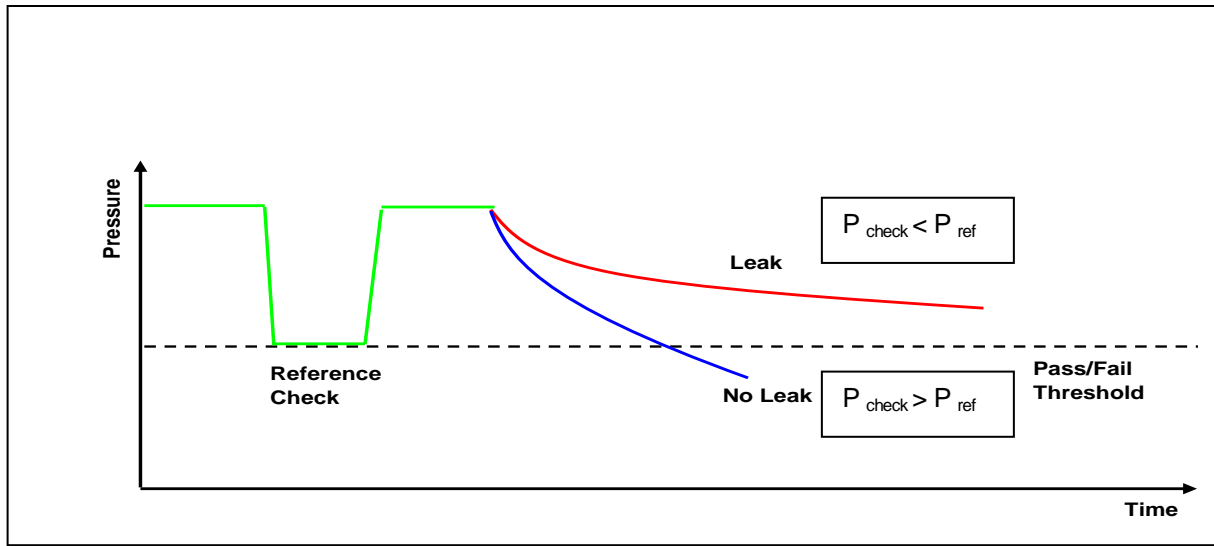

The ELCM leak detection test runs at key off if entry conditions such as vehicle soak, fuel level, ambient temperature, BARO, etc. are satisfied. The test sequence begins with a pump warm-up time of 5 minutes followed by a reference check calculation. Once the reference check is obtained, the pump is turned off which allows the vacuum to equalize to atmosphere. The changeover valve is then energized and the Evap system is evacuated. The pump stays on until the vacuum crosses the reference check threshold or the vacuum trace flat-lines above the reference check threshold.

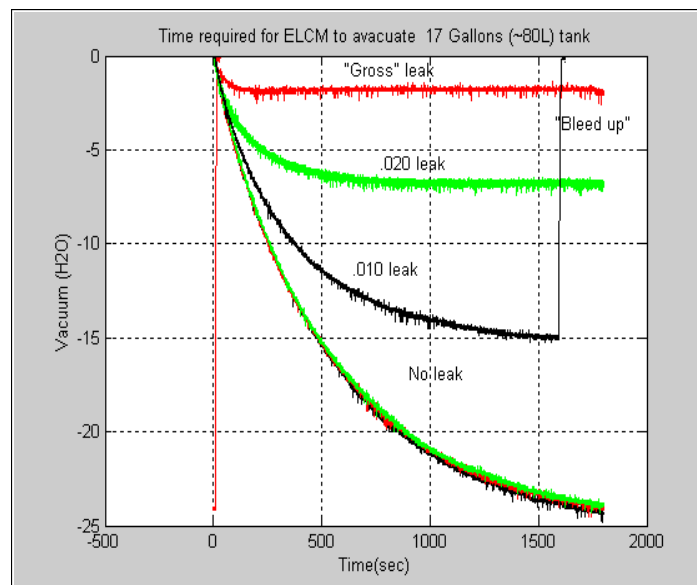

In addition to running leak diagnostics, the evap monitor also performs numerous functional tests on the individual components that are used for the evap leak check, (i.e., stuck open/closed COV, stuck on/stuck off pump, restricted orifice, stuck open/stuck closed Fuel Tank Isolation Valve, stuck closed Canister Purge Valve) The monitor runs once per drive cycle during a key off condition and increments the Evap System IUMPR numerator once the ghost monitor completes. Rate based completion frequency (IUMPR) is reported via J1979 Mode\$09. The ELCM system is used in sealed (PHEV) and non-sealed (HEV) evap systems. Although the algorithm between sealed and non-sealed applications differs slightly (sealed system has FTIV while non-sealed has VBV), the leak detection method remains the same.


Fuel Systems Hardware – Sealed (PHEV) vs non-Sealed (HEV)

HEVs use a traditional non-sealed evaporative system. This is because the engine is expected to run for extended periods of time on an HEV so fuel vapors will get purged on a regular basis.

- Uses traditional Canister Purge Valve (CPV)
- Uses traditional Vapor Blocking Valve (VBV)
- Uses traditional (low pressure) Fuel Tank Pressure Transducer (FTPT)
- ELCM replaces Canister Vent Valve (CVV).
- VBV de-energized state is open

Plug in HEVs (PHEV) use a sealed evaporative system. The sealed fuel system is designed to contain fuel vapors while not refueling. This is because the engine may not run for extended periods of time on a PHEV so fuel vapors do not get purged on a regular basis. Internally, the sealed system is known as a NIRCOS (Non-Integrated Refueling Canister Only System).

- Canister sized for refueling vapors only
- Uses a structurally improved steel fuel tank
- Tank pressure relief at -2.5 psi and 5.5 psi
- Requires an electric refueling system to relieve the pressure in the tank
- Uses traditional Canister Purge Valve (CPV)
- Uses High Pressure Fuel Tank Pressure Transducer (HPFTPT)
- Uses Fuel Tank Isolation Valve (FTIV) in place of Vapor Blocking Valve (VBV)
- FTIV de-energized state is closed
- When FTIV is closed, it splits the evap system into two separately diagnosable system – the "fuel tank side" and the "fresh air side"

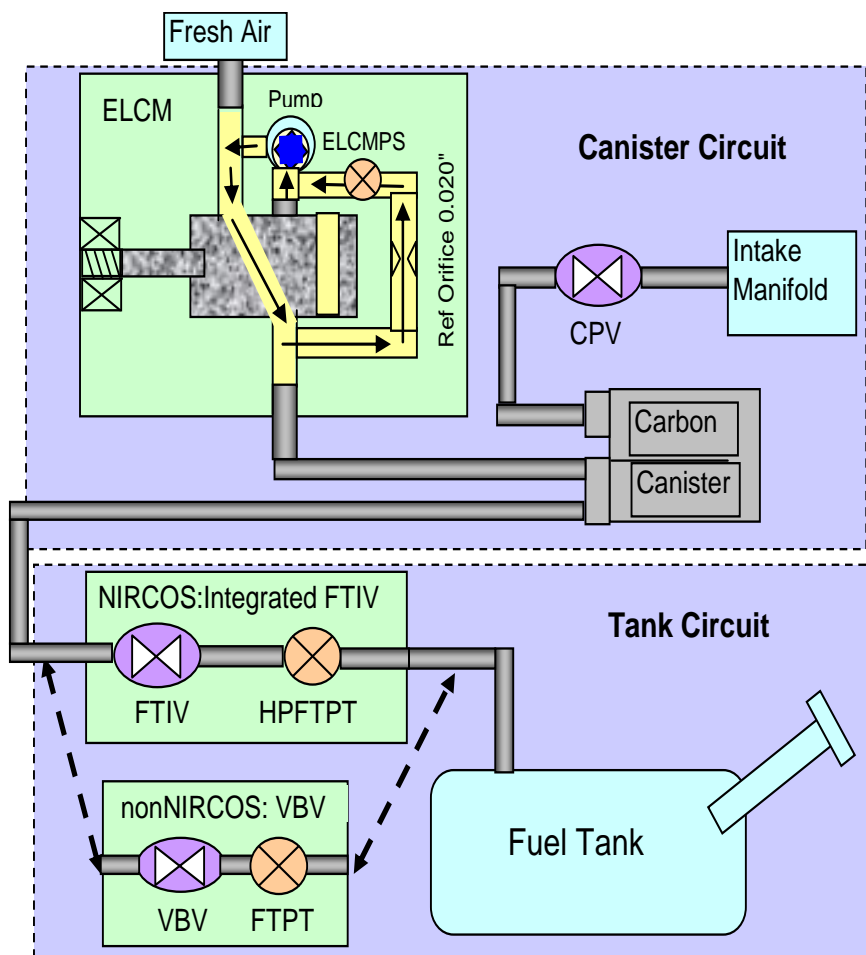

EVAP System Monitor – Engine Running Diagnostics

The EVAP diagnostics can be split into two categories:

Engine Running Diagnostics (HEV and PHEV), consisting of:

- A purge flow/gross leak (P04ED)
- Excessive vacuum (P1450)
- Fresh air line blockage (P144B)
- Canister Purge Valve component checks (P0443)
- Vapor Blocking Valve stuck open (P2450) (HEV only)

Engine Off (After-run) Diagnostics, consisting of:

- The 0.020" /0.040" leak check
- All other EVAP system and component diagnostics are executed during the engine off period.

The engine running diagnostics are described below:

The **Canister Purge Valve (CPV)** output circuit is checked for opens and shorts (P0443)

Note that a stuck closed CPV generates a P04ED, a leaking or stuck open CPV generates a P1450.

Canister Purge Valve Circuit Check Operation:

DTCs	P0443 – Evaporative Emission System Purge Control Valve "A" Circuit
Monitor execution	engine running, continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds to obtain smart driver status

Typical Canister Purge Valve Circuit Check malfunction thresholds:

P0443: open/shorted

This test checks to see if the fresh air line to ELCM unit is clogged or restricted. The fresh air line flow test is performed with the engine running, the Change Over Valve (COV) off and purge flow commanded on.

Fresh Air Line Flow Check Operation:	
DTCs	P144B - EVAP System Secondary Purge Vapor Line Restricted/Blocked
Monitor execution	engine running, once per driving cycle
Monitor Sequence	P1450 completed and OK
Sensors/Components OK	P0456, P0457, P24B9, P24BA, P24BB, P0100, P0102, P0103, P0106, P0107, P0108, P0720
Monitoring Duration	

Fresh Air Line Flow Check entry conditions		
Entry condition	Minimum	Maximum
Air Mass	> 0 lbs/min	
Vehicle Speed	0 mph	
BARO (<8,000 ft altitude)	22.0 " Hg	
Battery Voltage	11 volts	18 volts
Closed loop fuel control		
Purge Flow	0.04 lbm/min	
Manifold Vacuum	2.0 inHg	

Typical Fresh Air Line Flow Check malfunction thresholds:
Relative vacuum at ELCM < -20.0 inH2O / 4981.78 Pa OR
Absolute vacuum at ELCM > 60 inH2O / 14945.3 Pa

J1979 Fresh Air Line Flow Check Mode \$06 Data			
Monitor ID	Comp ID	Description for CAN	Units
\$3D	\$85	Blocked EVAP System Fresh Air Line	Pa
Note: Default values (0.0) will be displayed for all the above TIDs if the evap monitor has never completed. The appropriate TID will be updated based on the current or last driving cycle, default values will be displayed for any phases that have not completed.			

This test is a functional check on the HEV for excessive leakage through the EVAP Switching Valve (Vapor Blocking Valve) when it is commanded closed. It runs during the flow test during engine running. This test only completes on the full hybrid. The Plug In hybrid tests the FTIV during the key off ELCM monitor.

EVAP Switching Valve Functional Check Operation:	
DTCs	P2450 - EVAP System Switching Valve Performance/Stuck Open
Monitor execution	engine running, once per driving cycle
Monitor Sequence	P1450 not running
Sensors/Components OK	P0456, P0457, P24B9, P24BA, P24BB, P0100, P0102, P0103, P0106, P0107, P0108, P0720
Monitoring Duration	4 sec

EVAP Switching Valve Functional Check entry conditions		
Entry condition	Minimum	Maximum
Vapor Blocking Valve (VBV) commanded closed		
Air Mass	> 0 lbs/min	
Vehicle Speed	0 mph	
Intake Air Temperature	40 deg F	95 deg F
Fuel Level	15%	85%
BARO (<8,000 ft altitude)	22.0 " Hg	
Battery Voltage	11 volts	18 volts
Purge Flow	0.08 lbm/min	
Manifold Vacuum	2.0 in Hg	
Relative ELCM Pressure	-99 in H ₂ O	
Time Since Last Abort	20 sec	

Typical EVAP Switching Valve Functional Check malfunction thresholds:
ELCM pressure sensor rate of change during flow test > 20.0 inH ₂ O / 4981.78 Pa

J1979 EVAP Switching Valve Functional Mode \$06 Data			
Monitor ID	Comp ID	Description for CAN	Units
\$3D	\$82	Vapor Blocking Valve Performance	Pa
\$3D	\$86	Fuel Tank Isolation Valve Stuck Open	Pa/sec
\$3D	\$87	Fuel Tank Isolation Valve Stuck Closed	Pa/sec
Note: Default values (0.0) will be displayed for all the above TIDs if the evap monitor has never completed. The appropriate TID will be updated based on the current or last driving cycle, default values will be displayed for any phases that have not completed.			

This is a functional check for a stuck open canister purge valve. This generates too much vacuum during the purge flow test

EVAP Flow Check Operation:	
DTCs	P1450 - Unable to Bleed Up Fuel Tank Vacuum
Monitor execution	engine running, once per driving cycle
Monitor Sequence	
Sensors/Components OK	P0456, P0457, P24B9, P24BA, P24BB, P0100, P0102, P0103, P0106, P0107, P0108, P0720
Monitoring Duration	5 sec

EVAP Flow Check entry conditions		
Entry condition	Minimum	Maximum
Purge Flow		0.0 lbm/min
Manifold Vacuum	2.0 in Hg	
BARO (<8,000 ft altitude)	22.0 " Hg	
Battery Voltage	11 volts	18 volts
FTIV or VBV commanded closed		
COV commanded closed		

Typical EVAP Flow Check malfunction thresholds:
Relative vacuum at ELCM > -10.0 inH ₂ O / -2490.89 Pa.

J1979 EVAP Flow Check Functional Mode \$06 Data			
Monitor ID	Comp ID	Description for CAN	Units
\$3D	\$83	Purge Valve Stuck Open	Pa
\$3D	\$84	Purge Valve Stuck Closed	Pa
Note: Default values (0.0) will be displayed for all the above TIDs if the evap monitor has never completed. The appropriate TID will be updated based on the current or last driving cycle, default values will be displayed for any phases that have not completed.			

This test is a functional check for purge flow. With Change Over Valve (COV) and purge commanded on, if not enough delta vacuum is seen by the ELCM in calibrated time then the P04ED DTC will set.

EVAP Large Leak Functional Check Operation:	
DTCs	P04ED - EVAP System Large Leak Detected - Fresh Air Side
Monitor execution	engine running, once per driving cycle
Monitor Sequence	P1450 not running
Sensors/Components OK	P0456, P0457, P24B9, P24BA, P24BB, P0100, P0102, P0103, P0106, P0107, P0108, P0720
Monitoring Duration	4 seconds

EVAP Large Leak Functional Check entry conditions		
Entry condition	Minimum	Maximum
Vapor Blocking Valve (VBV) commanded closed		
Air Mass	> 0 lbs/min	
Vehicle Speed	0 mph	
Intake Air Temperature	20 deg F	95 deg F
Fuel Level	15%	85%
BARO (<8,000 ft altitude)	22.0 " Hg	
Battery Voltage	11 volts	18 volts
Purge Flow	0.08 lbm/min	
Manifold Vacuum	2.0 in Hg	
Relative ELCM Pressure	-99 in H ₂ O	
Time Since Last Abort	20 sec	

Typical EVAP Large Leak Functional Check malfunction thresholds:
Relative vacuum at ELCM < 8.0 inH ₂ O / < 1992.71 Pa for > 4 seconds.

J1979 EVAP Flow Check Functional Mode \$06 Data			
Monitor ID	Comp ID	Description for CAN	Units
\$3D	\$83	Purge Valve Stuck Open	Pa
\$3D	\$84	Purge Valve Stuck Closed	Pa
Note: Default values (0.0) will be displayed for all the above TIDs if the evap monitor has never completed. The appropriate TID will be updated based on the current or last driving cycle, default values will be displayed for any phases that have not completed.			

EVAP System Monitor – Engine Off Diagnostics

ELCM Leak Detection 0.020" Monitor Entry Conditions

Engine Off and Key Off (After-run) Diagnostics, consisting of:

- The 0.020" leak check
- All other EVAP system and component diagnostics are executed during the engine off period.

Note: there is a "Wait" period after key-off to ensure that ELCM pump temperature is within the specified operating temperature. The "Wait" time is a function of ambient temperature (5 – 17 min).

The entry conditions for the engine off monitor are evaluated while the vehicle is being driven, prior to shut down. Basic entry conditions for the leak diagnostics are a combination of conditions mandated by CARB and others intended to make the monitor robust to false calls.

Phase 0: BARO Reference/ELCM Functional Tests

The first phase starts by obtaining a BARO reading. The PCM opens the CPV and vents any trapped vacuum. After some stabilization time, with all the ELCM actuators in their unpowered state, the monitor obtains a BARO reading.

Then the ELCM pump is turned on (COV not energized) to send flow through the reference orifice. If the slope of the ELCMPS pressure is less than a threshold value, then the monitor tentatively infers that the COV is stuck in the energized state and flow is not going through the reference orifice. This will set a P24C0 unless the pump functional test fails later in the test. Once the COV functional test is complete, the orifice functional test is performed. The stabilized ELCMPS pressure is compared to a threshold value to see if too much vacuum was produced. This would be an indication of a clogged/restricted orifice. In this case, the monitor aborts and a P043E DTC is set. The stabilized ELCMPS pressure is compared to a threshold value to see if too little vacuum was produced. This would be an indication of a high flow orifice. In this case, the monitor aborts and a P043F DTC is set. The last part of Phase 0 is the pump warm-up time (typically 5 min). Once the warm-up time is met, the ELCMPS pressure is compared against a threshold to determine how much vacuum was generated across the orifice during the warm-up time. Too little vacuum is an indication that the pump is stuck off in which case the monitor aborts and sets P2401 DTC. If all tests pass, monitor goes on to Phase 1.

Note: The ELCMPS sensor is an absolute sensor whereas the HPFTPT is a relative sensor. To compare the two sensors, the ELCMPS signal is converted to gauge by subtracting the BARO reading.

Phase 1: 1st Reference Pressure Measurement

In Phase 1, the resulting ELCMPS relative pressure is averaged and stored as a 0.020" reference. This 1st reference check is compared against a table of min and max reference pressures as a function of BARO. If the reference pressure is outside the min and max, the monitor aborts and sets a P24B9 DTC. Then, the vacuum pump is commanded off and the ELCMPS pressure is compared to atmospheric pressure. If the ELCMPS pressure does not go back up above a threshold pressure, the monitor infers that the vacuum pump is stuck on, aborts and sets a P2402 DTC. Otherwise, the monitor continues on with the next phase.

Phase 2: Vacuum Pull/Leak Detection

Phase 2 is the most critical phase in the ELCM monitor. This is where the Evap system (canister side only or the entire system) is evacuated using the ELCM vacuum pump. The COV as well as the vacuum pump are turned on. The COV stuck functional test is performed again to check whether the COV is stuck in the de-energized position. The rate of change of the ELCMPS pressure is compared to a threshold. The monitor aborts and set a P24C1 DTC if the ELCMPS vacuum slope is too high. If the COV test passes, the monitor goes on to check the FTIV valve for being stuck open. The rate of change of the ELCMPS pressure is calculated again and compared to a threshold. If the slope is too low, the FTIV is inferred to be stuck open and the monitor aborts and sets a P2450 DTC. If the FTIV had been commanded open and the rate of change of the ELCMPS pressure is greater than a threshold, then the FTIV is inferred to be stuck closed and the monitor aborts and sets a P2451 DTC.

Once the functional tests are complete, the monitor goes on to perform the leak check using the averaged, stabilized pressure. Leak test results are normalized to the reference pressure obtained in Phase 1. A normalized pressure greater than the 0.020" leak threshold (> 1.0) is a pass. For HEV, the test goes on to Phase 5. For PHEV, the test goes on to Phase 3

The monitor periodically computes the slope of the pressure value. If the slope indicates that the signal is "flat lining" without crossing the reference check threshold, the determination is that a leak is present, pending the vapor generation analysis. If the signal "flat lines" for an HEV, the monitor sets a preliminary P0456 failure flag and goes to Phase 5. For a PHEV, if the signal "flat lines", the monitor sets a preliminary P04EF failure flag indicating a leak on the fresh air side of the Evap system and the test goes on to Phase 3.

Phase 3: Tank Pressure Evaluation (PHEV only, sealed evap system)

In Phase 3, the filtered tank pressure is evaluated to determine whether the tank is leak-free or not. If there is sufficient pressure or vacuum buildup in the tank and the pressure/vacuum variation in the tank is low, the tank is properly sealed and there are no leaks. In such a case, the FTIV is left in its normally closed position and only the canister side of the Evap system is monitored for leaks. If the tank pressure/vacuum is near atmosphere or if the tank pressure/vacuum is high but has considerable variation, then the FTIV is commanded open and the entire Evap system is monitored for leaks. The monitor goes back to phase 2 to evacuate the entire Evap system.

If the monitor fails with the FTIV open, a fail flag is set to indicate a potential leak in the entire Evap system (P04EE).

There are no abort conditions in this phase. Note that there is a delay to allow the pressure to stabilize to atmospheric pressure between the tank and canister side checks.


Phase 4: Vapor Generation/CPV Stuck Closed (PHEV only, seal evap system)

This is the phase where the full Evap system is diagnosed for vapor generation in the case where a failure occurred in the second Phase 2 while the FTIV was open. Vapor generation for the fuel results in a positive pressure build up. It is typically caused by high RVP fuels and/or hot weather. The positive pressure can overwhelm the vacuum being generated by the low flow ELCM pump. Depending on the magnitude of the vapors, an otherwise sealed Evap system could be diagnosed as having a leak; therefore, the vapor generation check is needed to qualify any leak monitor fail calls.

The vapor generation routine is based on the ideal gas law. The temperature is assumed to be constant during the duration of the test. The volume is also assumed constant since the PHEV evap system uses a rigid, metal fuel tank. Any pressure change is, therefore, due to fuel vapors. Phase 4 starts out by turning off the vacuum pump and commands the COV to its vent position. With the FTIV open, the system is allowed to vent to atmosphere until the pressure climbs to near atmosphere or times out. In the case of a timeout, the tank is assumed to have intense vapors whereby even when it is open to atmosphere, the pressure is unable to equalize with atmospheric pressure. Once the vented tank pressure is close to atmosphere, the FTIV is closed and the tank is sealed for a calibrated time period. A positive pressure buildup more than a threshold value results in an abort and discarding the fail call (i.e. a "no call"). In the case of a "pass" call in phase 2, the vapor generation test is not run.

Phase 5: 2nd Reference Pressure Measurement

This is the final phase in the ELCM monitor. The purpose of this phase is to validate that the 1st reference check is accurate by obtaining a 2nd reference check and comparing the two. After some stabilization time, another BARO reading is obtained and compared to the first BARO reading. If the BARO readings do not match within a calibrated limit, the monitor aborts. If the BARO readings are consistent, the monitor continues by turning on the vacuum pump for a calibrated warm-up time. The 2nd reference check is compared against a table of min and max reference pressures as a function of BARO. If the reference pressure is outside the min and max, the monitor aborts and sets a P24B9 DTC. If the reference check is OK, then the 1st and 2nd reference checks are compared to each other. If they disagree by more than a calibrated limit, then the monitor aborts and sets a P24B9 DTC. If the BARO readings and reference pressures are reliable, then any evap system failures determined previously are confirmed.

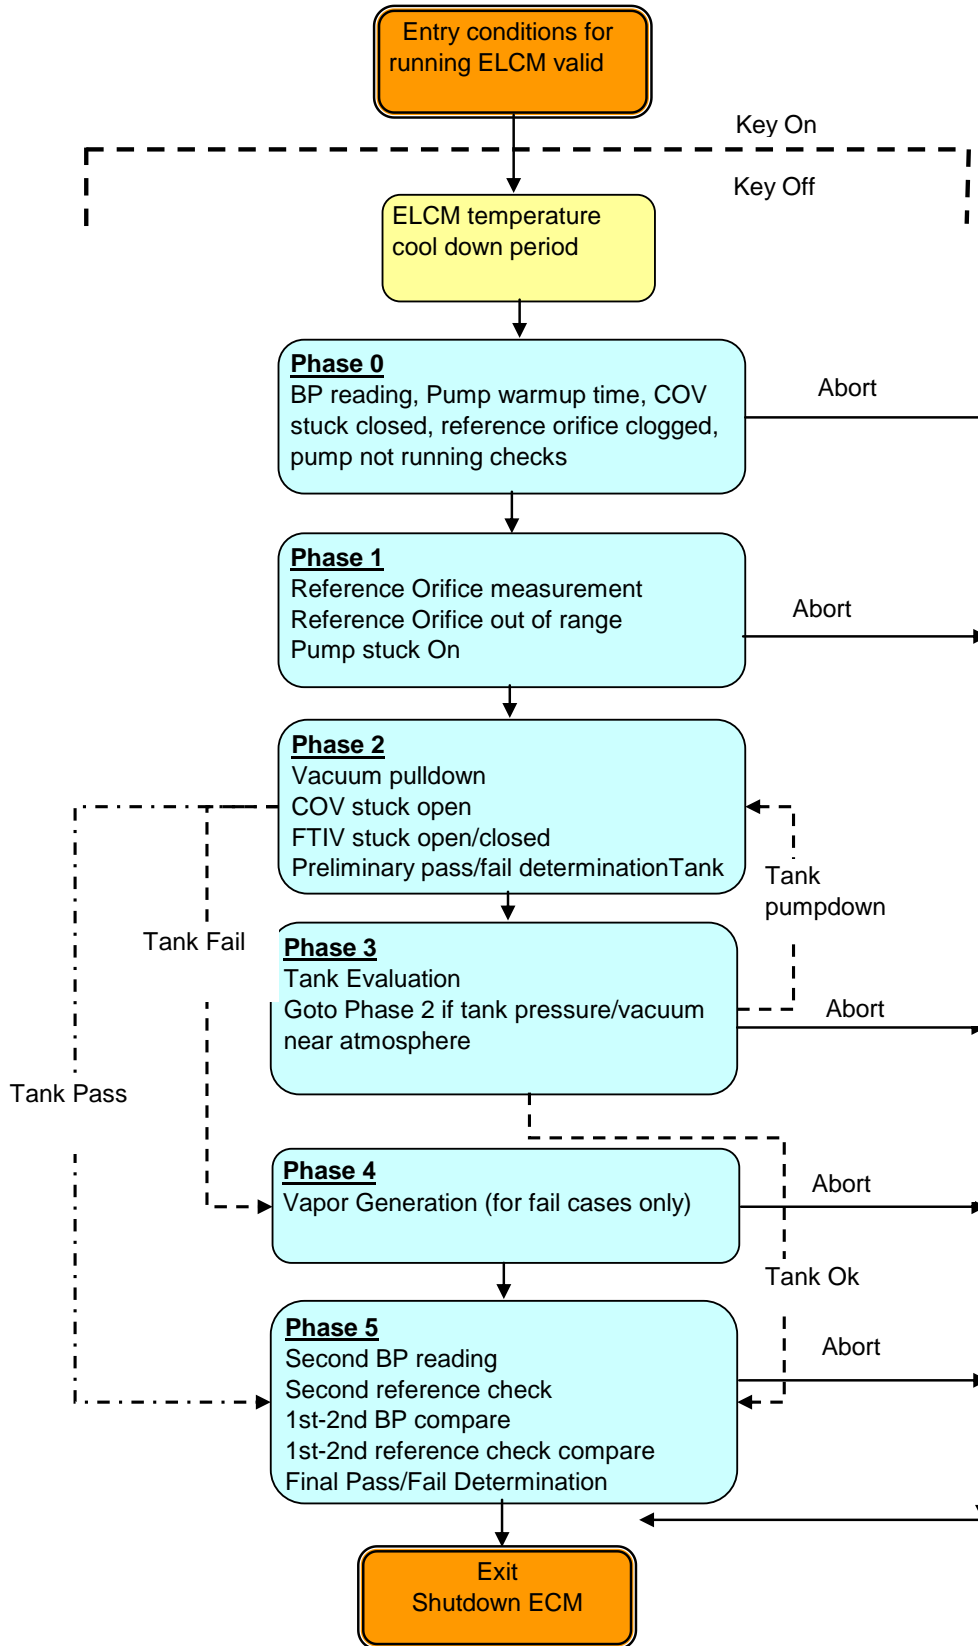

0.020" ELCM EVAP Monitor Operation:	
DTCs	P0456 – EVAP System Very Small Leak Detected (HEV) P0457 – EVAP System Leak Detected (fuel cap loose/off) (HEV/PHEV) P04EE - EVAP System Very Small Leak Detected - Fuel Tank Side (PHEV) P04EF - EVAP System Very Small Leak Detected - Fresh Air Side (PHEV)
Monitor execution	Once per key-off when entry conditions are met during drive.
Monitor Sequence	none
Sensors/Components OK	P0443, P2418, P24BE, P24BF, P2401, P2402, P144B, P04ED, P1450, P24BA, P24BB, P0451, P0452, P0453, P0454, P2610, P0112, P0113, P043E, P043F, P24C0, P24C1, P2450, P2451
Monitoring Duration	45 minutes in key-off state if fault present.

Typical 0.020" EONV EVAP monitor entry conditions:		
Entry conditions seen just prior to engine off	Minimum	Maximum
ELCM 24 hour run time		60 min
Time Since Pump ran	180 minutes	
Ambient Temperature	40 °F	95 °F
Battery Voltage	11 volts	16 volts
Engine Speed		1 rpm
Vehicle Speed		0.1 mph
Fuel level	15%	85%
Not a refueling event		
BARO	22 in Hg	
Accumulated Aar mass flow summation		1000000000 lbm/min
Delay period in afterrun	5 min	17 min
Too much time in afterrun		2300 sec for HEV, 2485 sec for PHEV

Typical 0.020" ELCM EVAP key-off abort conditions:
Tank pressure > 0.8 " H ₂ O during the 5 minute key-off stabilization phase (indicates excessive vapor)

Typical 0.020 ELCM EVAP monitor malfunction thresholds:

P0456: (0.020" leak): normalized pressure threshold (relative to reference pressure) < 1.0

AND

rate of change of pressure "flat lining" without crossing reference pressure; > 0.0 inH₂O/sec / 0.0 Pa/sec.

AND

Phase 2 monitor timeout without crossing reference pressure; > 800 sec for full Evap system, 100 sec for fresh air side of PHEV

P0457: same as P0456 except that previous driving cycle had a refueling event

J1979 EONV 0.020" EVAP monitor Mode \$06 Data

Monitor ID	Comp ID	Description for CAN	Units
\$3C	\$84	Phase 3 stabilized leak check - Fuel Tank Side.	Pa
\$3C	\$85	Phase 3 stabilized leak check - Fresh Air Side	Pa
\$3C	\$86	ELCM Change-Over-Valve Stuck Open OFF (De-energized state)	Pa/sec
\$3C	\$87	ELCM Change-Over-Valve Stuck Closed ON (Energized state)	Pa/sec
\$3C	\$88	ELCM Pump Stuck Off	Pa
\$3C	\$89	ELCM Pump Stuck On	Pa
\$3C	\$8A	ELCM Reference Orifice - Clogged, High Flow	Pa
\$3C	\$8B	ELCM Reference Orifice - Large size, Low Flow	Pa
\$3C	\$8D	ELCM Reference Pressure Out-of-Range	Pa

Note: Default values (0.0) will be displayed for all the above TIDs if the evap monitor has never completed. The appropriate TID will be updated based on the current or last driving cycle, default values will be displayed for any phases that have not completed.

EVAP System Monitor Engine Off Component Checks

Additional malfunctions that are identified as part of the evaporative system integrity check are as follows:

The **Canister Purge Valve (CPV)** output circuit is checked for opens and shorts (P0443)

Note that a stuck closed CPV generates a P04ED, a leaking or stuck open CPV generates a P1450.

Canister Purge Valve Circuit Check Operation:

DTCs	P0443 – Evaporative Emission System Purge Control Valve "A" Circuit
Monitor execution	engine off, continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds to obtain smart driver status

Typical Canister Purge Valve Circuit Check malfunction thresholds:

P0443: open/shorted

The **Evap Fuel Tank Switching Valve (EVAPSV)** control circuit is checked for opens and shorts (P2418). For the PHEV, this component is the FTIV (Fuel Tank Isolation Valve). For the HEV, this component is the VBV (Vapor Blocking Valve).

Note that a stuck closed Evap Switching Valve generates a P2451; a stuck open Evap Switching Valve generates a P2450.

Evap Switching Valve Check Operation:

DTCs	P2418 - Evap Switching Valve Circuit
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds to obtain smart driver status

Evap Switching Valve check malfunction thresholds:

P2418 (Evap Switching Valve Circuit): open/shorted

The **ELCM Leak Detection Pump Control Circuit** is checked for opens and shorts and functionally.

ELCM Pump Control Check Operation:	
DTCs	P2401 - EVAP System Leak Detection Pump Control Circuit Low P2402 - EVAP System Leak Detection Pump Control Circuit High
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds to obtain smart driver status

Typical ELCM Pump Control check malfunction thresholds:
P2401/P2402 - output driver open/shorted

ELCM Pump Control Functional Check Operation:	
DTCs	P2401 - EVAP System Leak Detection Pump Control Circuit Low P2402 - EVAP System Leak Detection Pump Control Circuit High
Monitor execution	during Phase 0 of evap monitor leak check
Monitor Sequence	Evap monitor leak detection condition met
Sensors OK	not applicable
Monitoring Duration	360 seconds in Phase 0, 5 seconds on Phase 1

Typical ELCM Pump Control Functional Check malfunction thresholds:
P2401: pressure at the end of 360 sec of warm-up time in Phase 0 too low; > -2.0 inH ₂ O / -498.18 Pa.
P2402: pressure increasing in Phase 1 after pump shut off for 5 sec; > 4.0 inH ₂ O / 996.35 Pa.

ELCM Pump Control Flow Check Operation:	
DTCs	P043E - EVAP System Leak Detection Reference Orifice Low Flow P043F - EVAP System Leak Detection Reference Orifice High Flow
Monitor execution	once per key off, after entry conditions have been met during pre-key off drive cycle
Monitor Sequence	during Phase 0 of evap monitor leak check
Sensors OK	not applicable
Monitoring Duration	60 seconds in Phase 0

Typical ELCM Pump Control flow check malfunction thresholds:
P043E: stabilized pressure at the end of Phase 0 too low <= -20.2 inH ₂ O / 5031.6 Pa
P043F: stabilized pressure at the end of Phase 0 too high > -2.8 inH ₂ O / > -697.45 Pa.

The **Evap Leak Detection Pump Vacuum Switching Valve / (Change Over Valve)** control circuit is checked for opens and shorts and functionally.

Evap Vacuum Switching Valve Circuit Check Operation:	
DTCs	P24BE - EVAP Leak Detection Pump Vacuum Switching Valve Control Circuit Low P24BF - EVAP Leak Detection Pump Vacuum Switching Valve Control Circuit High
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds to obtain smart driver status

Evap Vacuum Switching Valve Circuit Check malfunction thresholds:
P24BE/P24BF - output driver open/shorted

Evap Vacuum Switching Valve Functional Check Operation:	
DTCs	P24C0 - EVAP System Leak Detection Pump Vacuum Switching Valve Stuck On P24C1 - EVAP System Leak Detection Pump Vacuum Switching Valve Performance/Stuck Off
Monitor execution	P24C0 during Phase 0 of evap monitor leak check, P24C1 during Phase 2 of evap monitor leak check
Monitor Sequence	Evap monitor leak detection condition met
Sensors OK	P0443, P2418, P24BE, P24BF, P2401, P2402, P144B, P04ED, P1450, P24BA, P24BB, P0451, P0452, P0453, P0454, P2610, P0112, P0113, P043E, P043F, P24C0, P24C1, P2450, P2451
Monitoring Duration	65 seconds in Phase 0, 2 seconds in Phase 2

Evap Vacuum Switching Valve check malfunction thresholds:
P24C0: rate of change of pressure too low; < 1.2 inH ₂ O / 174.36 Pa
P24C1: rate of change of pressure too high; > 4.0 inH ₂ O / 996.35 Pa.

The **EVAP System Leak Detection Pump Pressure Sensor** input circuit is checked for opens and shorts, out of range values and noisy readings.

Leak Detection Pump Pressure Sensor Check Operation:	
DTCs	P24BA - EVAP System Leak Detection Pump Pressure Sensor Circuit Low P24BB - EVAP System Leak Detection Pump Pressure Sensor Circuit High P24B9 - EVAP System Leak Detection Pump Pressure Sensor Circuit Range/Performance P24BC - EVAP System Leak Detection Pump Pressure Sensor Circuit Intermittent (noisy)
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	20 seconds for electrical malfunctions, 10 seconds for noisy sensor test

Typical Leak Detection Pump Pressure Sensor check malfunction thresholds:
P24BA (Circuit low): < 168.96 inH ₂ O / 42.08 kPa.
P0453 (Circuit high): > 496.93 inH ₂ O / 123.78 kPa.
P24B9 (Reference out of range) > -1.5 to -5.5 in H ₂ O (function of BARO) OR < -17.5 to -21.5 in H ₂ O (function of BARO)
P24BC (noisy): open circuit, short circuit or > 25.0 inH ₂ O / 6.227 kPa change between samples, sampled every 100 milliseconds, filtered fault level of 25% will set code in 10 seconds

The **Fuel Tank Pressure Sensor** input circuit is checked for out of range values (P0452 short, P0453 open), noisy readings (P0454 noisy) and an offset (P0451 offset).

Note that for the PHEV, this component is the FTPHP (Fuel Tank Pressure Transducer – High Pressure). For the HEV, this component is the FTPT (Fuel Tank Pressure Transducer).

Fuel Tank Pressure Sensor Transfer Function		
FTP volts = [Vref * (0.14167 * Tank Pressure) + 2.6250] / 5.00		
Volts	A/D Counts in PCM	Fuel Tank Pressure, Inches H ₂ O
0.100	20	-17.82
0.500	102	-15.0
1.208	247	-10.0
2.625	464	0
3.475	712	6.0
4.750	973	15.0
4.90	1004	16.06

High Pressure Fuel Tank Pressure Sensor Transfer Function		
FTP volts = [Vref * (0.015 * Pump Pressure) + 1.15] / 5.00		
Volts	A/D Counts in PCM	Fuel Tank Pressure, Inches H ₂ O
0.25	51	-60.0
0.50	102	-43.33
1.15	235	0.00
2.05	419	60.00
3.00	614	123.33
4.50	921	223.33
4.75	970	240.0

Fuel Tank Pressure Sensor Check Operation:	
DTCs	P0452 – Fuel Tank Pressure Sensor Circuit Low P0453 – Fuel Tank Pressure Sensor Circuit High P0454 – Fuel Tank Pressure Sensor Intermittent/Erratic (noisy)
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds for electrical malfunctions, 10 seconds for noisy sensor test

Typical Fuel Tank Pressure Sensor check malfunction thresholds:

P0452 (Fuel Tank Pressure Sensor Circuit Low): < -17.82 in H₂O

P0452 (High Pressure Fuel Tank Pressure Sensor Circuit Low): < -60.00 in H₂O

P0453 (Fuel Tank Pressure Sensor Circuit High): > 16.06 in H₂O

P0453 (High Pressure Fuel Tank Pressure Sensor Circuit High): > 2401.00 in H₂O

P0454 (Fuel Tank Pressure Sensor Circuit Noisy): open circuit, short circuit or > 25 in H₂O change between samples, sampled every 100 milliseconds, filtered fault level of 25% will set code in 10 seconds

Fuel Tank Pressures Sensor Offset Check Operation

DTCs	P0451 – Fuel Tank Pressure Sensor Range/Performance (offset)
Monitor execution	once per driving cycle
Monitor Sequence	No P0443 or P1450 DTCs
Sensors OK	not applicable
Monitoring Duration	< 1 second

Typical Fuel Tank Pressure Sensor Offset Check Entry Conditions:

Entry condition	Minimum	Maximum
Ignition key on, engine off, engine rpm		0 rpm
Purge Duty Cycle		0%
Engine off (soak) time	240 min	
Fuel Tank Pressure Sensor Variation during test		0.5 in H ₂ O
Battery Voltage	11.0 Volts	

Typical Fuel Tank Pressure Sensor Offset Check Malfunction Thresholds:

Fuel tank pressure at key on, engine off is 0.0 in H₂O +/- 1.7 in H₂O

The **Fuel Level Input** is checked for out of range values (opens/ shorts). The FLI input is obtained from the serial data link from the instrument cluster. If the FLI signal is open or shorted, the appropriate DTC is set, (P0462 circuit low and P0463 circuit high).

Finally, the Fuel Level Input is checked for noisy readings. If the FLI input changes from an in-range to out-of-range value repeatedly, a P0461 DTC is set.

Fuel Level Input Check Operation:	
DTCs	P0460 – Fuel Level Sensor A Circuit P0461 – Fuel Level Sensor A Circuit Noisy P0462 – Fuel Level Sensor A Circuit Low P0463 – Fuel Level Sensor A Circuit High
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	30 seconds for electrical malfunctions

Typical Fuel Level Input check malfunction thresholds:	
P0460 or P0462 (Fuel Level Input Circuit Low): < 5 ohms (< 1 A/D count)	
P0460 or P0463 (Fuel Level Input Circuit High): > 200 ohms (>1022 A/D counts)	
P0461 (Fuel Level Input Noisy): > 40% change between samples, > 100 occurrences, sampled every 0.100 seconds	

The FLI signal is also checked to determine if it is stuck. "Fuel consumed" is continuously calculated based on PCM fuel pulsewidth summation as a percent of fuel tank capacity. (Fuel consumed and fuel gauge reading range are both stored in KAM and reset after a refueling event or DTC storage.) If there is an insufficient corresponding change in fuel tank level, a P0460 DTC is set.

Different malfunction criteria are applied based on the range in which the fuel level sensor is stuck.

In the range between 6% and 93%, a 17.5% difference between fuel consumed.

In the range below 6%, a 27.5% difference between fuel consumed.

In the range above 93%, a 80.5% difference between fuel consumed.

Fuel Level Input Stuck Check Operation:	
DTCs	P0460 – Fuel Level Input Circuit Stuck
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	Between 6 and 93%, monitoring can take from 100 to 120 miles to complete

Typical Fuel Level Input Stuck check malfunction thresholds:
<p>P0460 (Fuel Level Input Stuck):</p> <p>Fuel level stuck at greater than 93%: > 80.5% difference in calculated fuel tank capacity consumed versus change in fuel level input reading</p> <p>Fuel level stuck at less than 6%: > 27.5% difference in calculated fuel tank capacity consumed versus change in fuel level input reading</p> <p>Fuel level stuck between 6% and 93%: > 17.5% difference in calculated fuel tank capacity consumed versus change in fuel level input reading</p>

PHEV Re-Fueling System

The PHEV uses a pressurized evap system. In order to refuel the vehicle, the customer needs to push a fuel door button in the cabin. This allows the PCM to both open a latch on the spring-loaded fuel fill door on the outside of the vehicle to provide access to the fuel filler inlet and open an FTIV (Fuel Tank Isolation Valve) which vents the evap system to the canister and allows refueling fuel vapors to enter the canister.

If the FTIV is not open, the evap system will vent when the customer pushes the fuel fill nozzle into the fuel fill inlet and the customer will not be able to refuel the vehicle because the displaced vapors have no where to go).




Refuel Button

Refueling Process:

- Customer presses "refuel button"
- Signal is sent from BCM to PCM
- PCM opens FTIV & reads FTPT
- PCM sends cluster message "Please wait to refuel"
- Once fuel pressure is relieved, PCM unlocks fuel door solenoid.
- PCM sends cluster message "Ready to Refuel"
- Customer dispenses fuel
- Customer closes fuel door
- PCM recognizes closed fuel door by switch state
- FTIV closes

Mechanical Fail Safe Mode:

- Customer presses "refuel button"
- Customer activates mechanical override of locking solenoid
- PCM recognizes fuel door is open by switch position
- Continue from "Refueling Process", third item (PCM opens FTIV & reads FTPT).

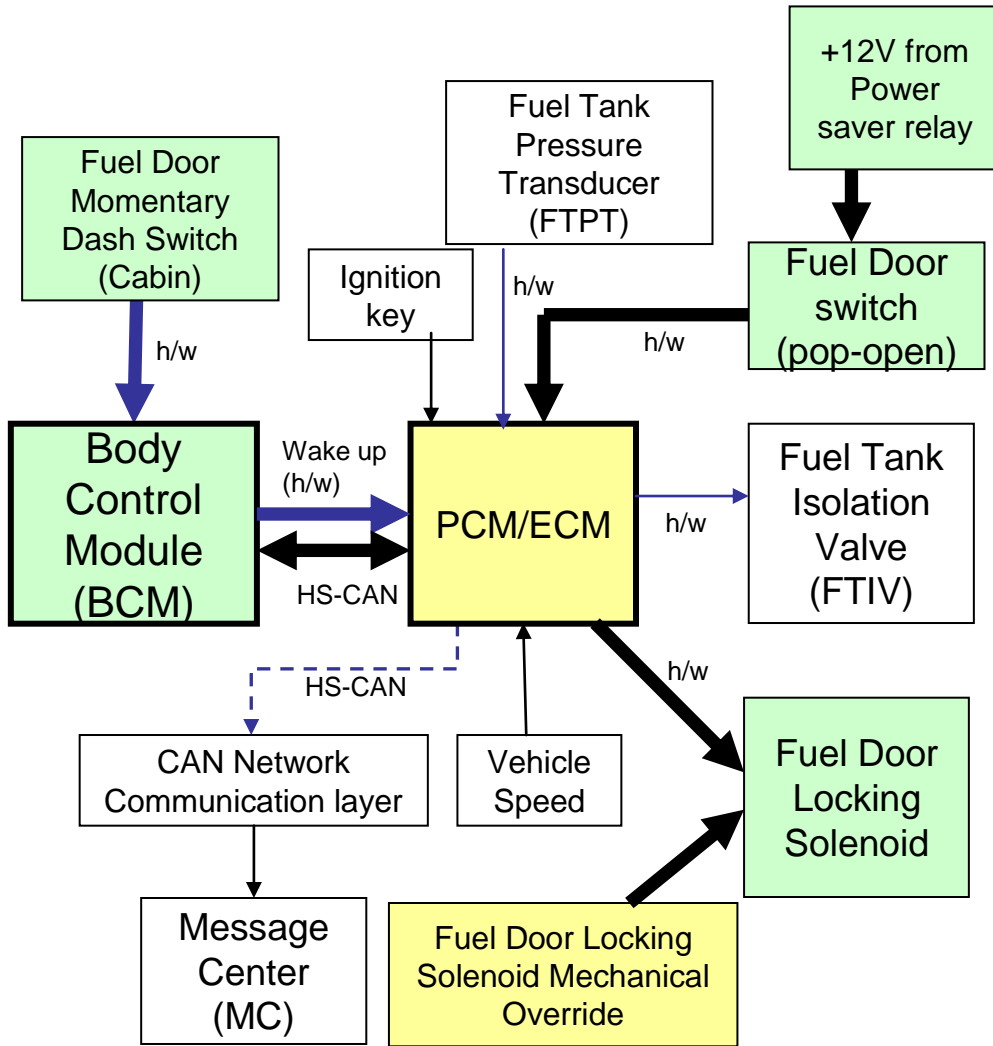

The **Fuel Door Switch** is checked for opens and shorts and functionally.

Fuel Door Switch Check Operation:	
DTCs	P04BA - Fuel Fill Door Position Sensor / Switch Circuit High P04B9 - Fuel Fill Door Position Sensor / Switch Circuit Low P04B5 - Fuel Fill Door Stuck Open
Monitor execution	continuous, engine off
Monitor Sequence	After refueling is requested, P04B5 after refueling is completed
Sensors OK	not applicable
Monitoring Duration	5 seconds

Typical Fuel Door Switch check malfunction thresholds:
<p>P04BA:</p> <ol style="list-style-type: none"> 1) Shorted to battery (door closed). Fuel door opens after unlock solenoid is energized but no indication to PCM. No indication to PCM to close FTIV after refueling. FTIV stays open longer than required. FTIV will close after timeout period. 2) Mechanically stuck (door closed). Fuel door opens after unlock solenoid is energized but no indication to PCM. No indication to PCM to close FTIV after refueling. FTIV stays open longer than required. FTIV will close after timeout period. 3) Mechanically stuck latched. Customer cannot refuel vehicle
<p>P04B9:</p> <ol style="list-style-type: none"> 1) Open circuit (door open). No indication to PCM to close FTIV after refueling. FTIV will close after timeout period. 2) Shorted to ground (door open). No indication to PCM to close FTIV after refueling. FTIV will close after timeout period. 3) Mechanically stuck unlatched. Fuel door always unlatched. Potential for fuel spit back if customer refuels without pushing cabin refuel button (not likely)
<p>P04B5:</p> <ol style="list-style-type: none"> 1) Mechanically stuck (door open) or customer did not close fuel door. No indication to close FTIV after refueling.

The **Cabin Refuel Switch** is checked for opens and shorts and functionally.

Cabin Refuel Switch Check Operation:	
DTCs	P04C9 - Fuel Fill Door Open Request Sensor / Switch Performance / Stuck Off. P04CD - Fuel Fill Door Open Request Sensor / Switch Performance / Stuck On. U0140 – Lost Communication With Body Control Module U0442 – Invalid Data Received from Body Control Module
Monitor execution	continuous, engine off, > 5 mph for P04CD
Monitor Sequence	After refueling is requested
Sensors OK	not applicable
Monitoring Duration	5 seconds

Cabin Refuel Switch check malfunction thresholds:	
<p>P04C9:</p> <ol style="list-style-type: none"> 1) Circuit shorted to battery. No request to open fuel door or FTIV. Customer cannot refuel vehicle without using manual override. 2) Circuit open. No request to open fuel door or FTIV. Customer cannot refuel vehicle without using manual override. 3) Button mechanically stuck not depressed. No request to open fuel door or FTIV. Customer cannot refuel vehicle without using manual override. 	
<p>P04CD:</p> <ol style="list-style-type: none"> 1) Circuit shorted to ground. Always requesting vent and fuel door unlock when vehicle is stopped and in park or neutral with park brake activated. FTIV will close after timeout period. 2) Button mechanically stuck depressed. Always requesting vent and fuel door unlock when vehicle is stopped and in park or neutral with park brake activated. FTIV will close after timeout period. 	
<p>U0140/U422:</p> <ol style="list-style-type: none"> 1) CAN message between BCM and PCM missing or invalid. No request to open fuel door or FTIV. Customer cannot refuel vehicle without using manual override. 	

The **Fuel Fill Door Unlock Control Circuit** is checked for opens and shorts and functionally.

Fuel Fill Door Unlock Control Check Operation:	
DTCs	P04C2 - Fuel Fill Door Unlock Control Circuit High P04C1 - Fuel Fill Door Unlock Control Circuit Low
Monitor execution	continuous, engine off
Monitor Sequence	After refueling is requested
Sensors OK	not applicable
Monitoring Duration	5 seconds

Fuel Fill Door Unlock Control check malfunction thresholds:
P04C2: 1) Circuit shorted to power. (fuel door latched). Customer cannot refuel vehicle without using manual override. 2) Circuit open (fuel door latched). Customer cannot refuel vehicle without using manual override.
P04C1: 1) Circuit shorted to ground. (fuel door unlatched). Fuel door always unlatched. Potential for fuel spit back if customer refuels without pushing cabin refuel button (not likely)

Fuel System Monitor

The adaptive fuel strategy uses O2 sensors for fuel feedback. The fuel equation includes short and long term fuel trim modifiers:

$$\text{FUEL MASS} = \frac{\text{AIR MASS} * \text{SHRTFT} * \text{LONGFT}}{\text{EQUIV_RATIO} * 14.64}$$

Where:

Fuel Mass = desired fuel mass

Air Mass = measured air mass, from MAF sensor

SHRTFT = Short Term Fuel Trim, calculated


LONGFT = Long Term Fuel Trim, learned table value, stored in Keep Alive Memory


EQUIV_RATIO = Desired equivalence ratio, 1.0 = stoich, > 1.0 is lean, < 1.0 is rich

14.64 = Stoichiometric ratio for gasoline


A conventional O2 sensor (not a wide-range sensor) can only indicate if the mixture is richer or leaner than stoichiometric. During closed loop operation, short term fuel trim values are calculated by the PCM using oxygen sensor inputs in order to maintain a stoichiometric air/fuel ratio. The PCM is constantly making adjustments to the short term fuel trim, which causes the oxygen sensor voltage to switch from rich to lean around the stoichiometric point. As long as the short term fuel trim is able to cause the oxygen sensor voltage to switch, a stoichiometric air/fuel ratio is maintained.

When initially entering closed loop fuel, SHRTFT starts 1.0 and begins adding or subtracting fuel in order to make the oxygen sensor switch from its current state. If the oxygen sensor signal sent to the PCM is greater than 0.45 volts, the PCM considers the mixture rich and SHRTFT shortens the injector pulse width. When the cylinder fires using the new injector pulse width, the exhaust contains more oxygen. Now when the exhaust passes the oxygen sensor, it causes the voltage to switch below 0.45 volts, the PCM considers the mixture lean, and SHRTFT lengthens the injector pulse width. This cycle continues as long as the fuel system is in closed loop operation.

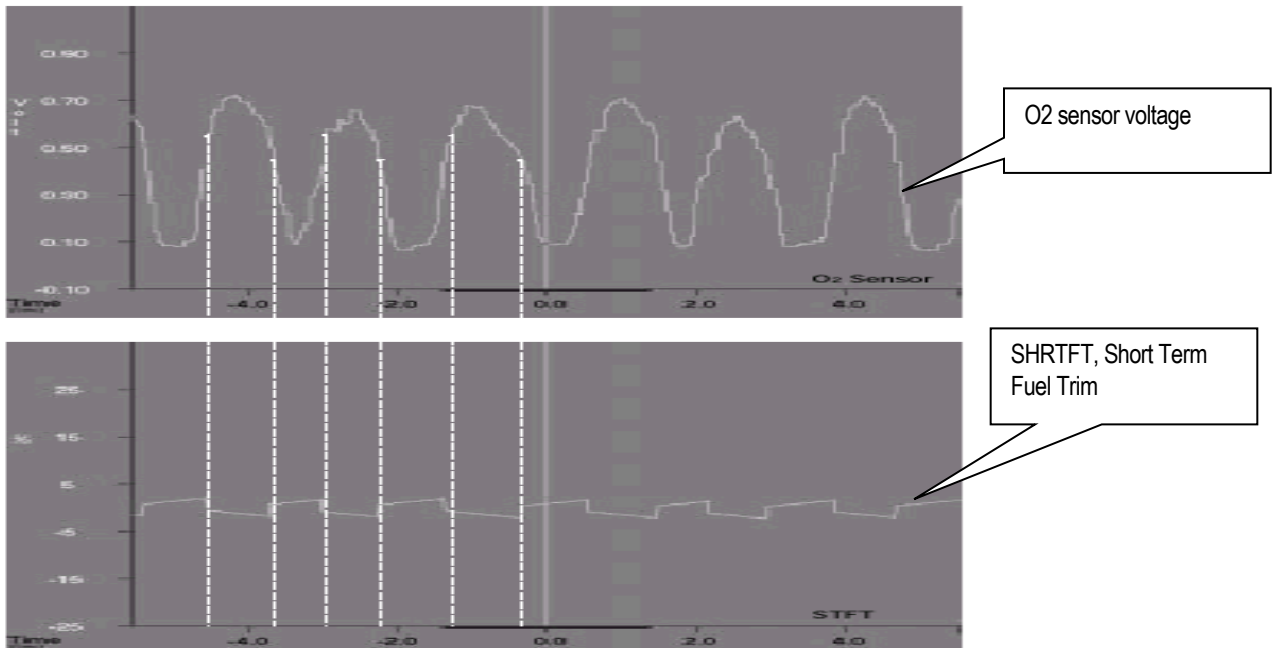


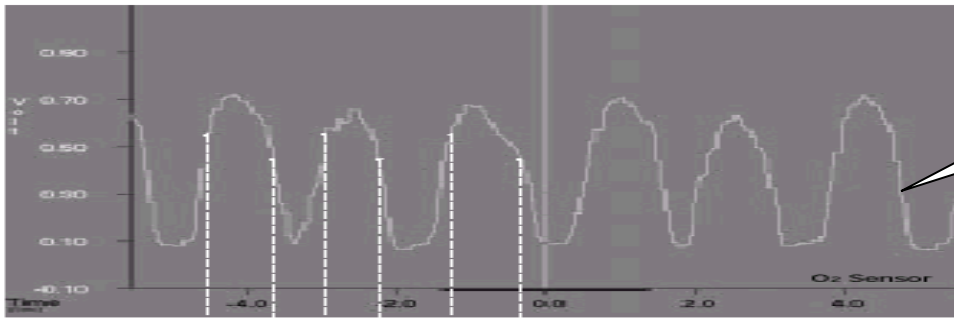


O2 sensor voltage

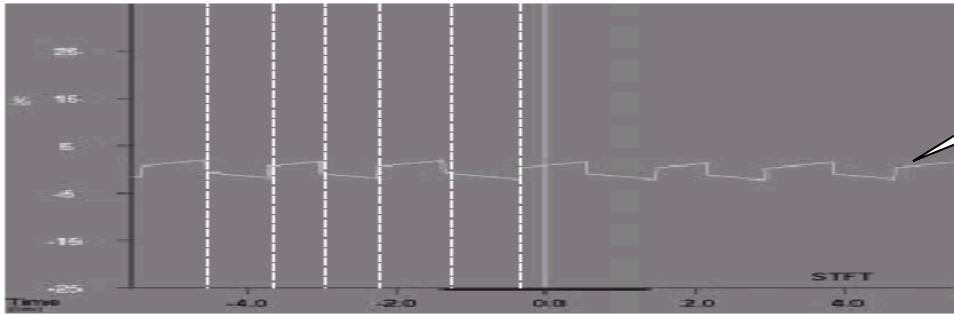

SHRTFT, Short Term Fuel Trim


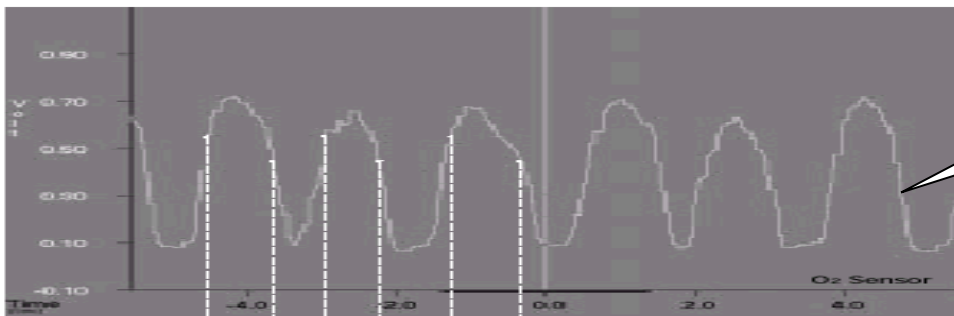



O2 sensor voltage

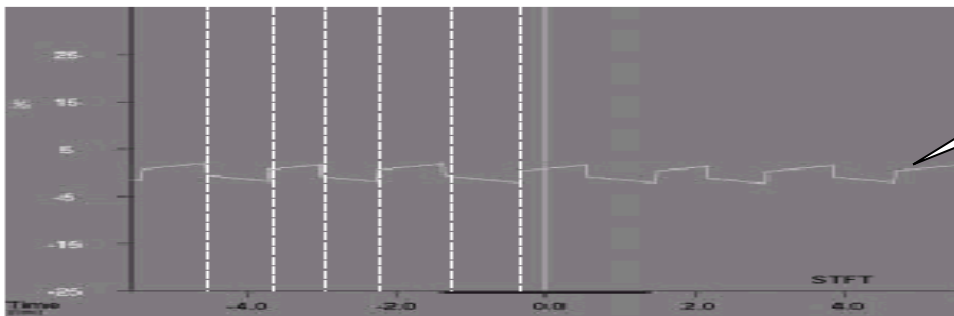

SHRTFT, Short Term Fuel Trim

As fuel, air, or engine components age or otherwise change over the life of the vehicle, the adaptive fuel strategy learns deviations from stoichiometry while running in closed loop fuel. Corrections are only learned during closed loop operation, and are stored in the PCM as long term fuel trim values (LONGFT). They may be stored into an 8x10 rpm/load table or they may be stored as a function of air mass. LONGFT values are only learned when SHRTFT values cause the oxygen sensor to switch. If the average SHRTFT value remains above or below stoichiometry, the PCM "learns" a new LONGFT value, which allows the SHRTFT value to return to an average value near 1.0. LONGFT values are stored in Keep Alive Memory as a function of air mass. The LONGFT value displayed on the scan tool is the value being used for the current operating condition.

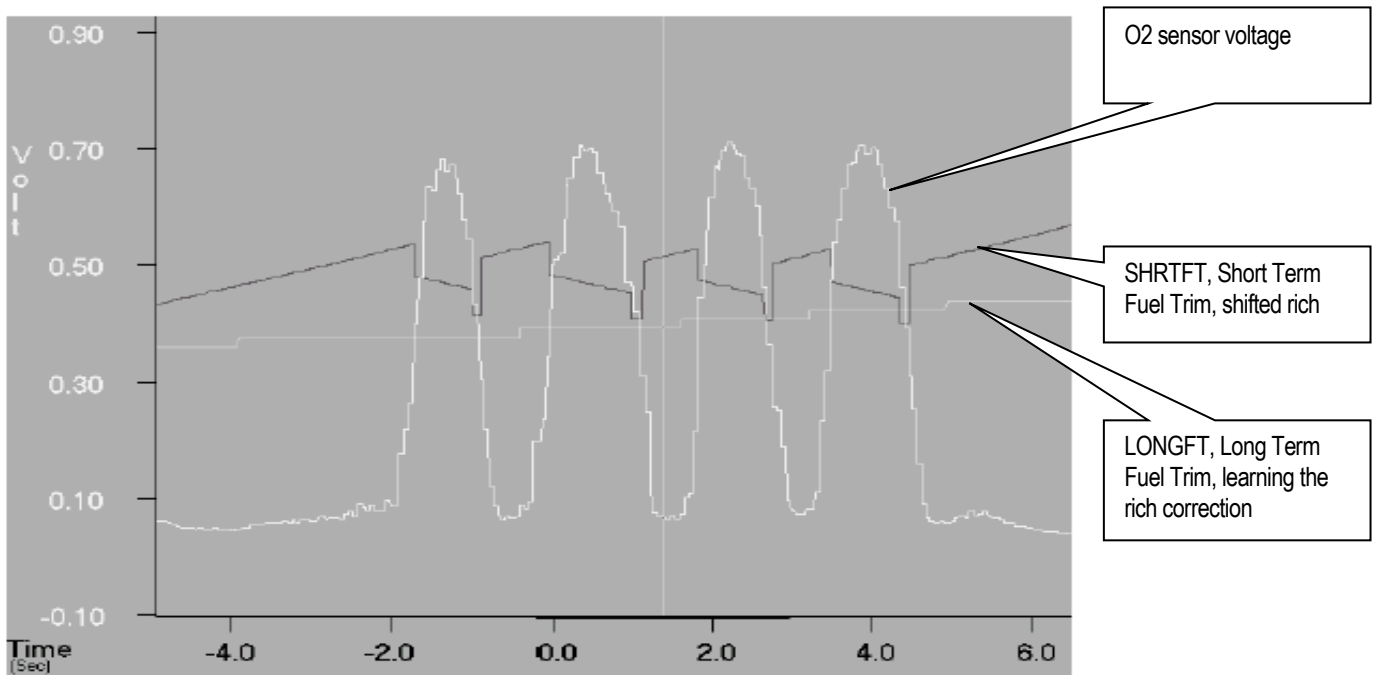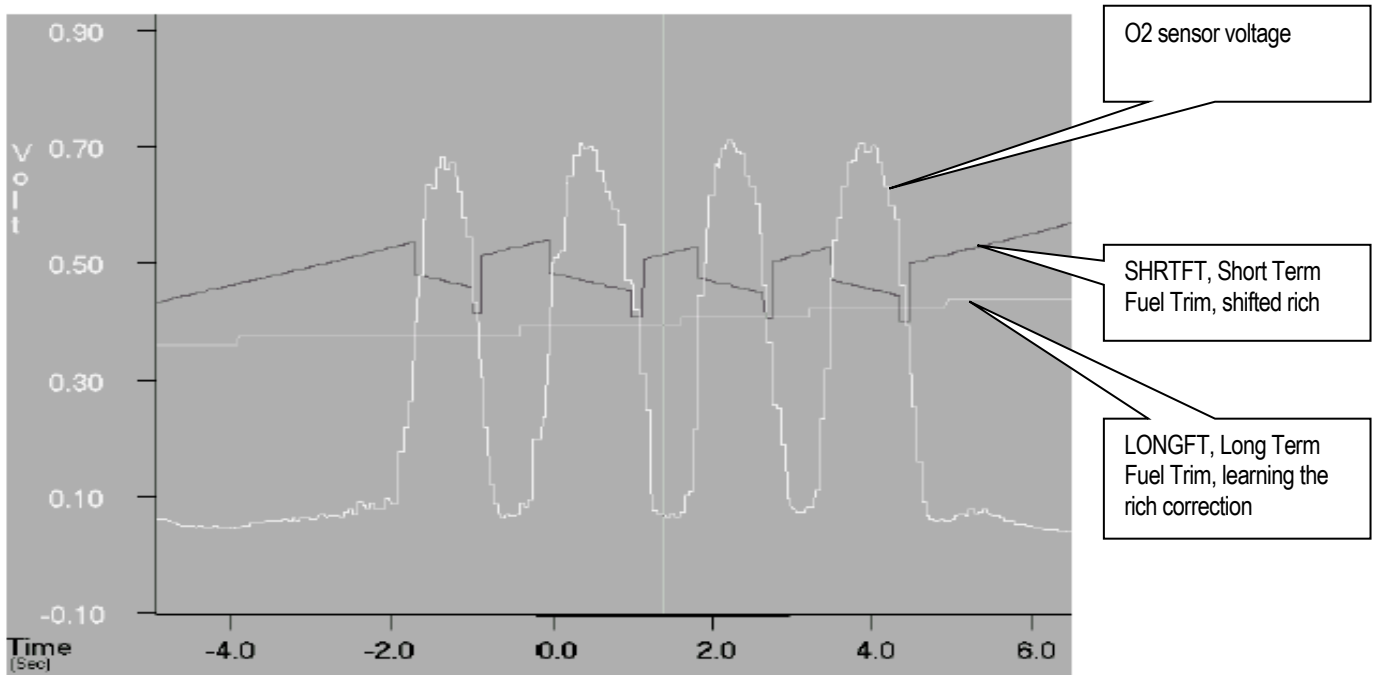


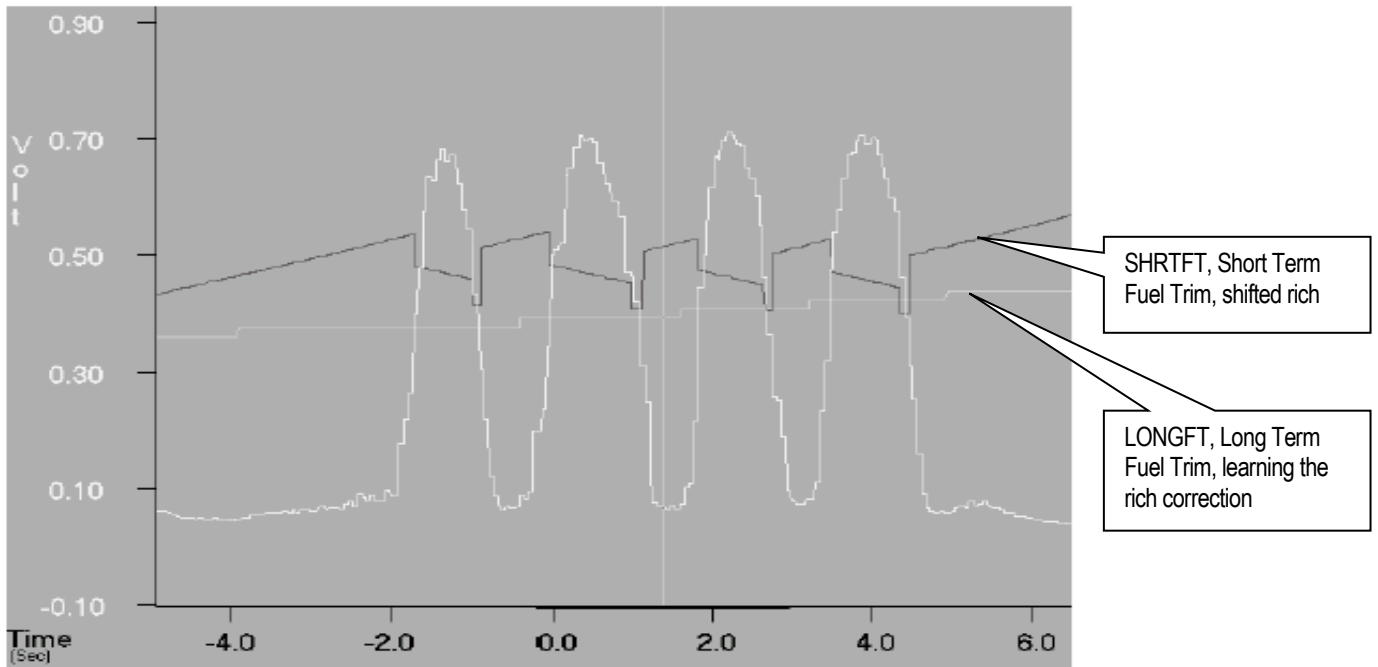

As components continue to change beyond normal limits or if a malfunction occurs, the long-term fuel trim values will reach a calibratable rich or lean limit where the adaptive fuel strategy is no longer allowed to compensate for additional fuel system changes. Long term fuel trim corrections at their limits, in conjunction with a calibratable deviation in short term fuel trim, indicate a rich or lean fuel system malfunction.

Note that in the PCM, both long and short-term fuel trim are multipliers in the fuel pulse width equation. Scan tools normally display fuel trim as percent adders. If there were no correction required, a scan tool would display 0% even though the PCM was actually using a multiplier of 1.0 in the fuel pulse width equation.

Fuel System Monitor

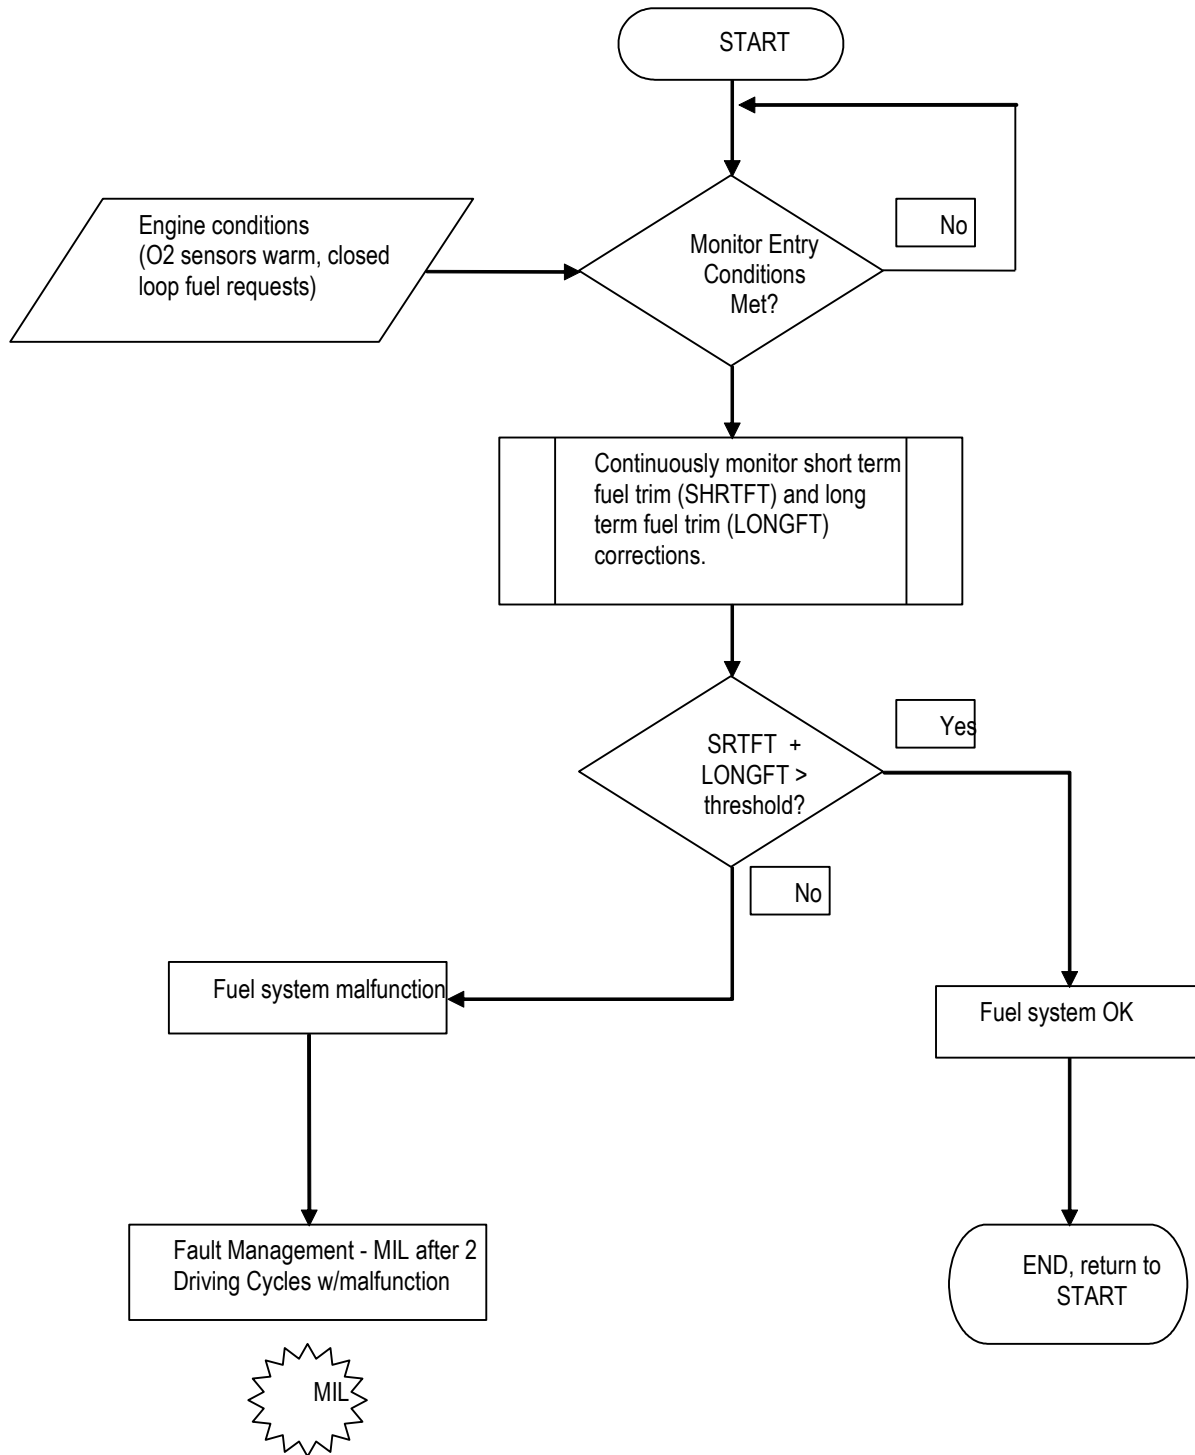

Fuel Monitor Operation:	
DTCs	P0171 Bank 1 Lean P0172 Bank 1 Rich
Monitor execution	continuous while in closed loop fuel
Monitor Sequence	none
Sensors OK	Fuel Rail Pressure (if available), IAT, CHT/ECT, MAF, TP
Monitoring Duration	2 seconds to register malfunction

Typical fuel monitor entry conditions:		
Entry condition	Minimum	Maximum
Engine Coolant Temp	155 °F	230 °F
Intake Air Temp	-40 °F	150 °F
Engine Load	30%	
Purge Duty Cycle	0%	0%
Fuel Level	15%	

Typical fuel monitor malfunction thresholds:
Long Term Fuel Trim correction cell currently being utilized in conjunction with Short Term Fuel Trim: Lean malfunction: LONGFT > 28%, SHRTFT > 2% Rich malfunction: LONGFT < 24%, SHRTFT < -2%

FAOSC (Rear Fuel Trim) Monitor

As the front UEGO sensor ages and gets exposed to contaminants, it can develop a rich or lean bias in its transfer function. The rear bias control (also called FAOSC – Fore/Aft Oxygen Sensor Control) system is designed to compensate for any of these bias shifts (offsets) using the downstream HO2S sensor. The "FAOS" monitor looks for any bias shifts at the stoichiometric point of the front UEGO sensor lambda curve. If the UEGO has developed a bias beyond the point for which it can be compensated for, lean (P2096, P2098) or rich (P2097, P2099) fault codes will be set.

UEGO "FAOS Monitor" Operation:	
DTCs	P2096 – Post catalyst fuel trim system too lean (Bank 1) P2097 – Post catalyst fuel trim system too rich (Bank 1)
Monitor execution	Continuous while in closed loop fuel
Monitor Sequence	> 30 seconds time in lack of movement test, > 30 seconds time in lack of switch test
Sensors OK	ECT, IAT, MAF, MAP, VSS, TP, ETC, FRP, FVR, DPFE EGR, VCT, VMV/EVMV, CVS, CPV, EVAPSV, FTP, CKP, CMP, ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, no EVAP gross leak failure, UEGO heaters OK, rear HO2S heaters OK, no "lack of switching" malfunction, no "lack of movement" malfunction, no UEGO circuit malfunction, no rear stream 2 HO2S circuit malfunction, no rear stream 2 HO2S functional DTCs, no rear stream 2 HO2S response rate malfunction.
Monitoring Duration	5 seconds to register a malfunction

Typical UEGO "FAOS Monitor" entry conditions:


Entry condition	Minimum	Maximum
Closed loop stoich fuel control		
Time since engine start	2 seconds	
Engine Coolant Temp	150 °F	235 °F
Time since entering closed loop fuel	10 seconds	
Fuel Level	15%	
Short Term Fuel Trim Range	-13%	18%
Short Term Fuel Trim Absolute Change		17%
Air mass range	1.5 lbm/min	8 lbm/min
Learning conditions stability time (based on air mass)	15 seconds	
Injector fuel pulsewidth (not at minimum clip)	850 usec	
Inferred HO2S 2 Heated Tip Temperature	800 °F	
No excessive movement between currently utilized long term fuel trim cells (1 = complete change from one cell to adjacent cell)		
UEGO sensor within +/- 2 % from the fuel control target		
UEGO ASIC not in recalibration mode		
Stream1 UEGO response test not running		
Intrusive UEGO catalyst monitor not running		
Not performing intrusive UEGO Lack-of-Movement fuel control defib		
Battery Voltage	11.0 Volts	18.0 Volts



Typical UEGO "FAOS Monitor" malfunction thresholds:

>= 5 seconds since reaching the FAOSC lean or rich limits while system bias maturity is met.

Air Fuel Ratio Imbalance Monitor

The Air Fuel Imbalance Monitor is designed to monitor the cylinder-to-cylinder air fuel imbalance per engine bank. When an Air Fuel (A/F) imbalance is present, the front UEGO signal becomes noisier. The monitor uses the high frequency component from the UEGO signal as an indicator of A/F imbalance. "Hash" is the difference between two consecutive front UEGO voltage samples. The UEGO signal is monitored continuously and a differential or "hash" value is continuously calculated. When the hash is below a threshold, it is indicative of normal operation. If the hash exceeds the threshold, an A/F imbalance is assumed which increments a hash error counter. The counter accumulates hash during series of calibratable rpm windows. Typically, a single window consists of 50 engine revolutions. A total rpm window counter calculates number of completed rpm windows. Monitor completion typically requires 30 rpm windows. When the monitor completes, an A/Fuel imbalance index is calculated. The monitor index is defined as the ratio of the failed rpm windows over the total rpm windows required to complete monitor. If the monitor imbalance ratio index exceeds the threshold value, an A/F imbalance DTC is set.

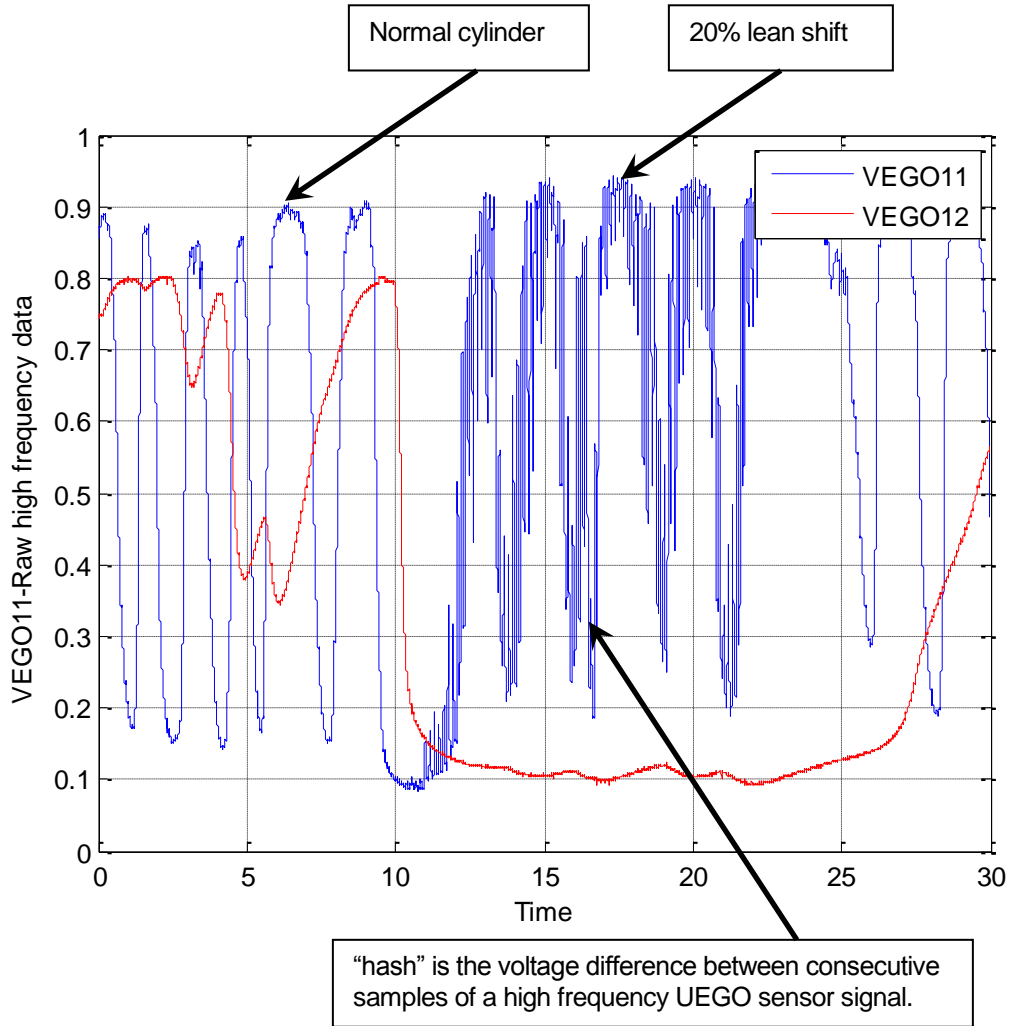

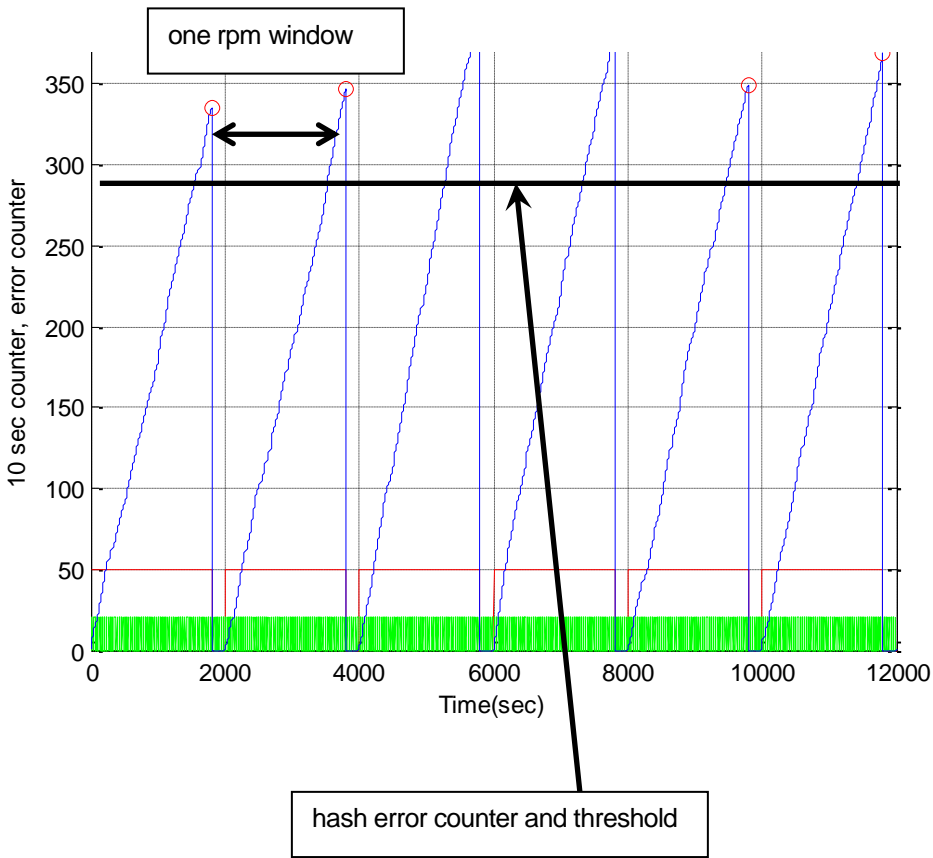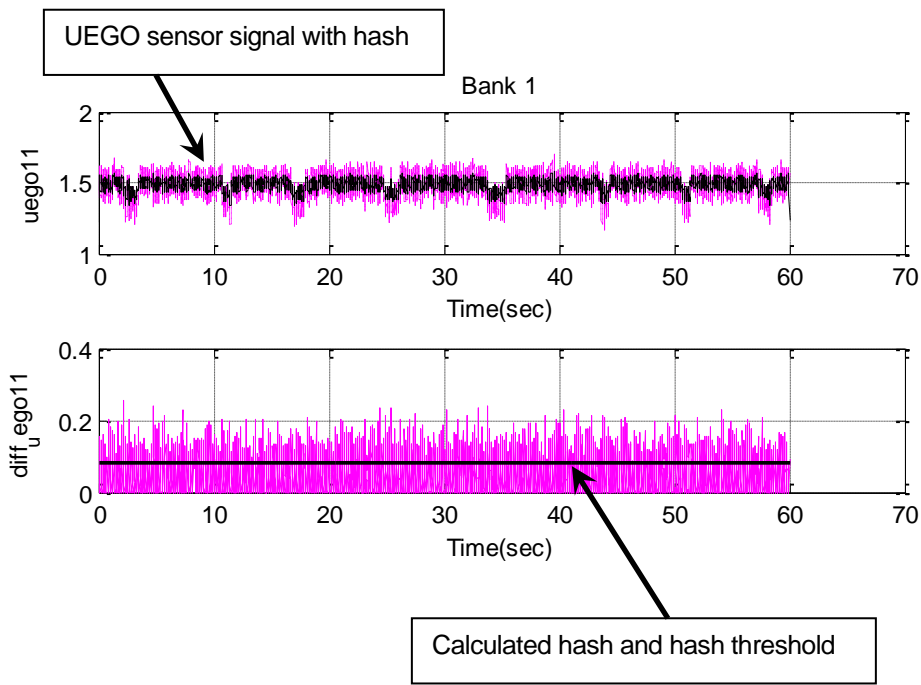

Air Fuel Ratio Imbalance Operation	
DTCs	P219A – Bank 1 Air-Fuel Ratio Imbalance
Monitor execution	Once per driving cycle during closed loop
Monitor Sequence	Monitor runs after fuel monitor has adapted
Sensors OK	ECT, IAT, MAF, VSS, TP, ETC, FRP, DPFE EGR, VCT, VMV/EVMV, CVS, FTP, CKP, CMP, ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, no EVAP gross leak failure, UEGO heaters OK, rear HO2S heaters OK, no "lack of switching" malfunction, no "lack of movement" malfunction, no UEGO circuit malfunction, no rear stream 2 HO2S circuit malfunction, no rear stream 2 HO2S functional DTCs, no rear stream 2 HO2S response rate malfunction.
Monitoring Duration	Time to complete monitor ranges from 300 to 700 seconds

Air Fuel Ratio Imbalance entry conditions:		
Entry condition	Minimum	Maximum
Closed Loop Fuel Control		
Engine Air Mass	1.5 lb/min	10 lb/min
Engine RPM	1250 rpm	2750 rpm
Engine Load	5%	75%
Engine Coolant Temp	150 °F	235 °F
Intake Air Temp	20 °F	150 °F
Throttle Position Rate of Change		0.122 v/100 msec
Fuel percentage from purge		40%
Fuel Level	15%	
Fuel monitor has adapted		
No purge on/off transition		
Fuel type leaning is complete (FFV only)		


Air Fuel Ratio Imbalance malfunction thresholds:
Imbalance Ratio Bank 1 > .65

J1979 AFIMN MONITOR MODE \$06 DATA			
Monitor ID	Test ID	Description	
\$81	\$80	Bank 1 imbalance-ratio and max. limit (P219A/P219B)	unitless

Front UEGO Monitor


Front UEGO Signal

The UEGO sensor infers an air fuel ratio relative to the stoichiometric (chemically balanced) air fuel ratio by balancing the amount of oxygen pumped in or out of a measurement chamber. As the exhaust gasses get richer or leaner, the amount of oxygen that must be pumped in or out to maintain a stoichiometric air fuel ratio in the measurement chamber varies in proportion to the air fuel ratio. By measuring the current required to pump the oxygen in or out, the air fuel ratio (λ) can be estimated. Note that the measured air fuel ratio is actually the output from the UEGO ASIC pumping current controller and not a signal that comes directly from the sensor.

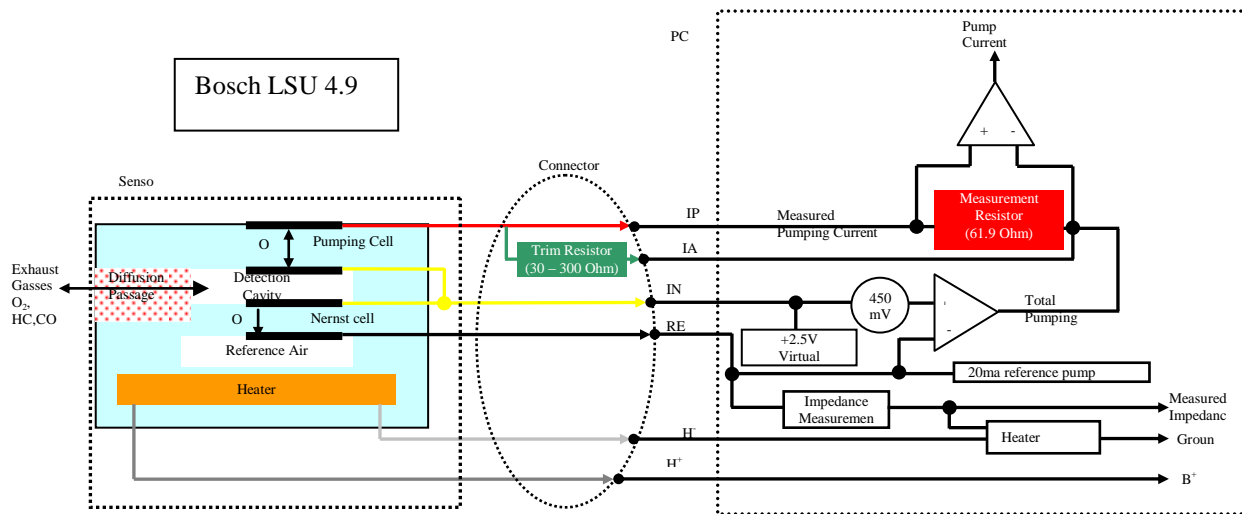

Bosch UEGO sensor interface:

- IP – primary pumping current that flows through the sensing resistor
- IA – current flow through trim resistor in parallel with sense resistor.
- VM – Virtual ground, approximately 2.5 volts above PCM ground.
- RE – Nernst cell voltage, 450mv from VM. Also carries current for pumped reference.
- H+ – Heater voltage – to battery.
- H- – Heater ground side – Duty cycle on/off to control sensor temperature.

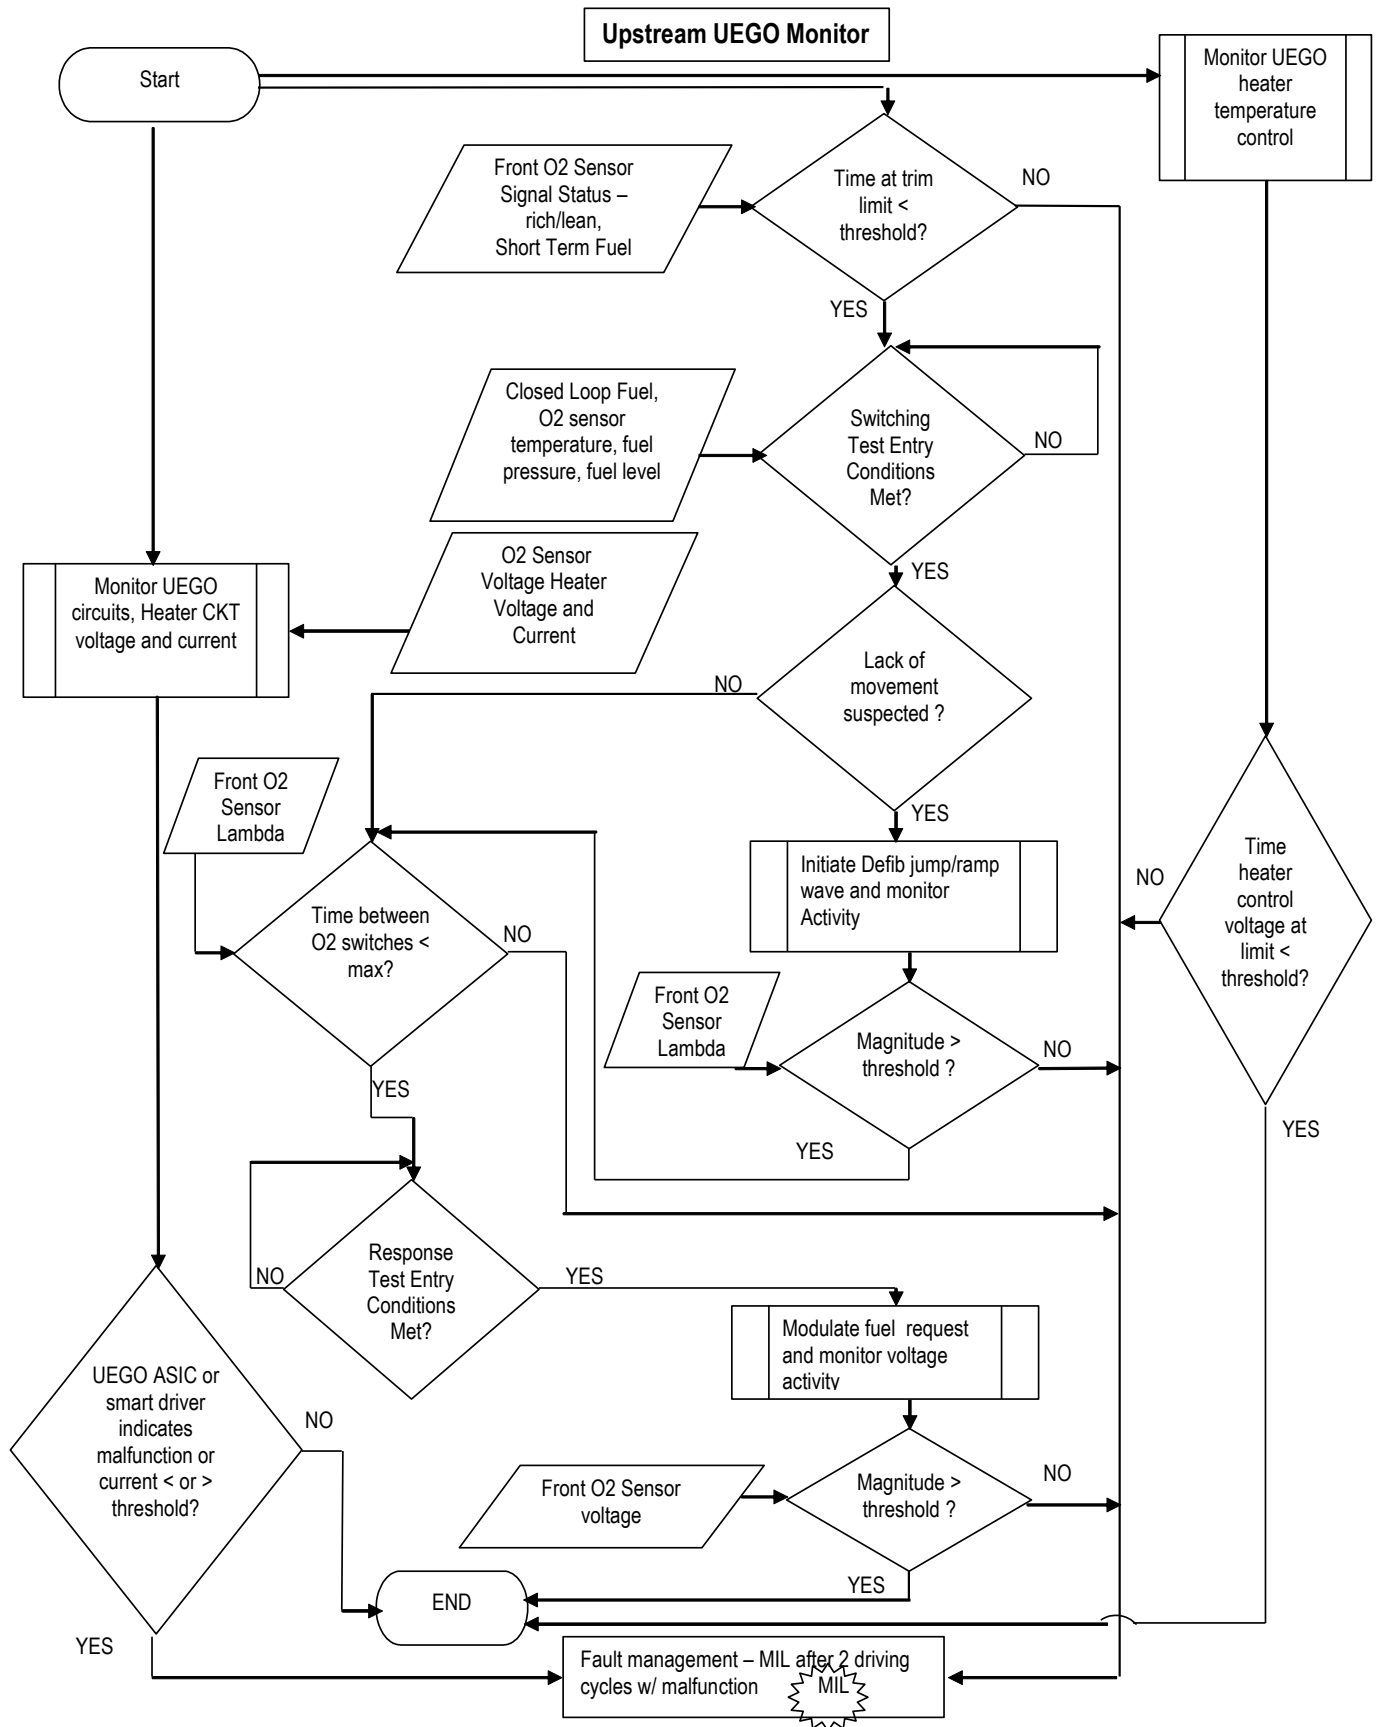


The primary component of a UEGO sensor is the diffusion passage that controls the flow of exhaust gasses into a detection cavity, a Nernst cell (essentially an EGO sensor inside the UEGO sensor) that measures the air fuel ratio in the detection cavity. A control circuitry in the ASIC chip (mounted in the PCM) controls the pumping current (IP) to keep the detection cavity near stoichiometry by holding the Nernst cell at 450 mV. This Nernst cell voltage (RE, VS) is 450mV from the virtual ground (VM, COM), which is approximately 2.5V (Bosch UEGO) or 3.6V (NTK UEGO) above the PCM ground. For the Nernst cell to generate a voltage when the detection cavity is rich, it needs an oxygen differential across the cell. In older UEGO (and HEGO) sensor designs, this was provided by a reference chamber that was connected to outside air through the wire harness that was subject to contamination and "Characteristic Shift Down (CSD)". The new UEGO sensor uses a pumped reference chamber, which is sealed from the outside to eliminate the potential for contamination. The necessary oxygen is supplied by supplying a 20 mA pumping current across the Nernst cell to pump small amounts of oxygen from the detection cavity to the reference chamber. The pumping cell pumps oxygen ions in and out of the detection cavity from and to the exhaust gasses in response to the changes in the Nernst cell voltage. The pumping current flows through the sense resistor and the voltage drop across the sense resistor is measured and amplified. Offset volts are sent out of the ASIC to one of the PCM's A/D inputs. The PCM measures the voltage supplied by the ASIC, determines the pumping current, and converts the pumping current to measured lambda. In general, the circuitry that measures the pumping current is used to estimate the air fuel ratio in the exhaust system.

The UEGO sensor also has a trim (IA) or label resistor (RL). The biggest source of part to part variability in the measured air fuel ratio is difference in the diffusion passage. This source of variation is simply the piece-to-piece differences from the manufacturing process. To compensate for this source of error, each sensor is tested at the factory and a trim or label resistor is installed in the connector. The value of this resistor is chosen to correlate with the measured difference between a particular sensor and a nominal sensor

For Bosch UEGO, the trim resistor is connected in parallel to the pumping current sense resistor and the pumping current flows through both. The trim resistor adjusts the measured pumping current back to the expected nominal value at any given air fuel ratio (correcting for the sensor to sensor variations in the diffusion passage). Small trim resistors are required for sensors that require more pumping current at any particular lambda. Conversely, for sensors with lower diffusion rates than average, less pumping current is required, so a higher than average impedance trim resistor is installed. When IA circuit is open, all of the pumping current flows through the measuring resistor which increases the measured voltage. Since the pumping current is amplified, the UEGO pumping current to lambda transfer function will reflect the error. The slope of the UEGO sensor transfer function changes, which results in the wrong output of the UEGO signal (the slope of the pumping current to lambda relationship can increase or decrease). For "stoichiometric" air/fuel control applications, an open IA circuit is not monitored since the lambda error is minimal in "stoichiometric" mode. A worst case (40 ohm resistor) open IA was tested on a 2008MY 3.5L Taurus PZEV and showed no impact on tailpipe emissions.

For "Non-Stoichiometric Closed Loop (NSCL)" air/fuel control applications, a continuous open IA diagnostics (Air Rationality Test) is required since the lambda error is more significant in this mode. The air rationality test will always monitor the UEGO sensor voltage reading during Decel Fuel Shut Off (DFSO) event. The monitor compares the UEGO sensor voltage reading in air against the expected value for pure air. If the UEGO sensor voltage during DFSO exceeds the maximum UEGO voltage in air threshold, then the fault timer increments. If the fault timer exceeds the fault time threshold, then open IA DTC P2626 and/or P2629 will set. Since transient sources of fuel in the exhaust after injector cut can contribute to the UEGO sensor voltage to read lower (rich), the air rationality monitor will not call a pass until the transient sources of fuel have been exhausted and pure air entry conditions during DFSO are met (i.e. all injectors must be off, purge must be off, no fuel must be leaking around the PCV valve, and a few transport delays must have passed to allow the last fuel transients to be exhausted leaving nothing for the sensor to see, but air).

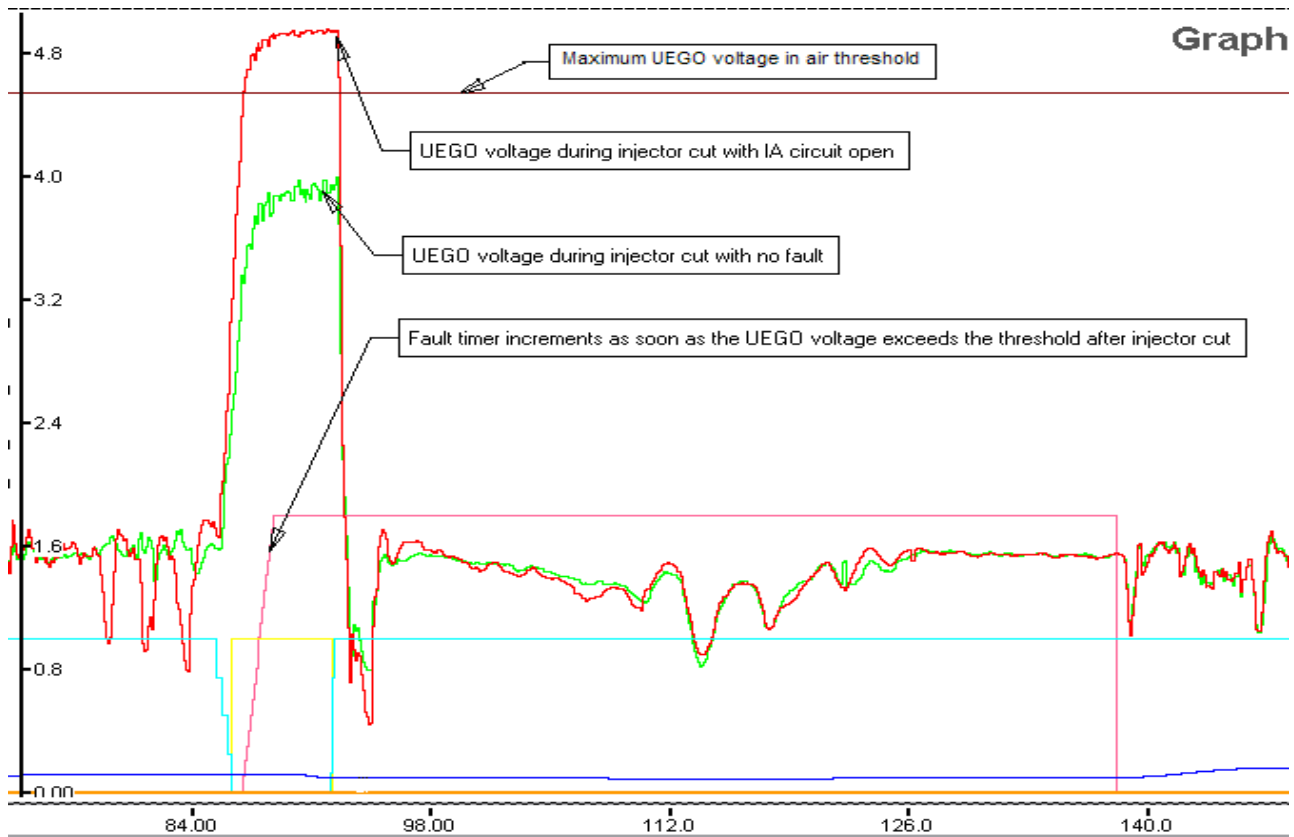

The time spent at the limits of the short term fuel trim and the time when the measured lambda is nearly 1.0 are monitored after vehicle startup when closed loop fuel has been requested, during closed loop fuel conditions, or when open loop fuel has been requested due to UEGO sensor fault. Excessive time with short term fuel trim at its limits (up to +/- 40%), or no rich / lean activity seen since startup indicates a "lack of switch" malfunction. Also, excessive time without measured lambda deviating from 1.0, in spite of attempts to force activity (defib) in the measured lambda, indicates a "lack of movement" malfunction. Since "lack of switching" malfunctions can be caused by UEGO sensor malfunctions or by shifts in the fuel system, DTCs are stored that provide additional information for the "lack of switching" malfunction. Different DTCs indicate whether the sensor always indicates lean (P2195, P2197), or always indicates rich (P2196, P2198). "Lack of movement" malfunction, (Bosch UEGO application only), typically indicating a disconnected wire (pumping current, IP), results in P0134, P0154 DTCs.

UEGO equipped vehicles will also monitor the circuitry between the PCM and the UEGO sensor via the wire diagnostics capability included on the UEGO ASIC chip. The wire diagnostics will detect wires (IP, IA, VM/COM, RE/VS) shorted to battery, or ground, and in most cases will detect open circuits (IP, VM/COM, RE/VS). The diagnostic bits are transmitted to the PCM via SPI (serial peripheral interface). The SPI communication is validated continuously, and if a SPI communication failure is detected, fault code(s) P064D and/or P064E will be set. The ASIC is also capable of detecting internal circuitry failure; in which case, an ASIC failure DTC (P1646, P1647) along with the SPI communication failure DTC (P064D, P064E) will be set.

UEGO "Lack of Switching" Operation:	
DTCs	P2195 - Lack of switching, sensor indicates lean, Bank 1 P2196 - Lack of switching, sensor indicates rich, Bank 1
Monitor execution	continuous, from startup and while in closed loop fuel or open loop fuel due to UEGO sensor fault
Monitor Sequence	None
Sensors OK	ECT, IAT, MAF, VSS, TP, ETC, VCT, VMV/EVMV, CVS, FTP, CKP, CMP, ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, no EVAP gross leak failure, UEGO heaters OK, no "lack of movement" malfunction, no UEGO circuit malfunction
Monitoring Duration	30 seconds to register a malfunction

Typical UEGO "Lack of Switching" entry conditions:		
Entry condition	Minimum	Maximum
Closed Loop or Open Loop Requested due to UEGO sensor fault		
No fuel flow entering thru PCV during cold start when flashing off fuel in oil (for O2 Sensor Stuck Rich DTCs only)		
Inferred Ambient Temperature	-40 °F	
Time within entry conditions	10 seconds	
Fuel Tank Pressure		10 in H ₂ O HEV, 50 in H ₂ O PHEV
Fuel Level	15%	
Battery Voltage	11.0 Volts	18.0 Volts

Typical UEGO "Lack of Switching" malfunction thresholds:
Stage 1: > 60 seconds since reaching the short term fuel trim limits while closed loop fuel or
Stage 2: < 1 second rich or < 1 seconds lean since startup for > 60 seconds in test conditions while open loop fuel is requested due to UEGO sensor fault.

UEGO "Lack of Movement – Open Pump Current Circuit" Operation (Bosch UEGO only):	
DTCs	P2237 – O2 Sensor Positive Current Control Circuit/Open (Bank 1, Sensor 1) (replaces P0134)
Monitor execution	continuous, from startup and while in closed loop fuel or open loop fuel due to UEGO sensor fault
Monitor Sequence	None
Sensors OK	ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, UEGO heaters OK, no "lack of switching" malfunction, no "lack of movement-open reference ground circuit" malfunction, no UEGO circuit malfunction
Monitoring Duration	10 - 20 seconds to register a malfunction

Typical UEGO "Lack of Movement – Open Pump Current Circuit " entry conditions (Bosch UEGO only):		
Entry condition	Minimum	Maximum
Closed Loop or Open Loop Requested due to UEGO sensor fault		
Constant lambda near stoich (~1)	0.99	1.01
Time since no lambda activity seen since start up	30 sec	
Time since no lambda activity during intrusive Stream 1 response monitor	3 sec	
Inferred Ambient Temperature	- 40 °F	
Injector fuel pulsewidth	650 usec	
UEGO ASIC not in recalibration mode		
No air passing through during valve overlap (scavenging).		
Battery Voltage	11.0 Volts	18.0 Volts

Typical UEGO "Lack of Movement – Open Pump Current Circuit" malfunction thresholds (Bosch UEGO only):
Stage 1: > 20 seconds in test conditions without lambda movement during fuel control and reference current "defib" while in closed loop fuel and ≤ 0.05 change in lambda movement.
Stage 2: < 0.2 seconds without lambda movement since startup for > 30 seconds in test conditions during reference current "defib" while open loop fuel is requested due to UEGO sensor fault and ≤ 0.05 change in lambda movement.

UEGO "Lack of Movement – Open Reference Ground Circuit " Operation (Bosch UEGO only):	
DTCs	P2251 – O2 Sensor Negative Current Control Circuit/Open (Bank 1, Sensor 1) (replaces P0130)
Monitor execution	continuous, from startup and while in closed loop fuel or open loop fuel due to UEGO sensor fault
Monitor Sequence	None
Sensors OK	ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, UEGO heaters OK, no "lack of switching" malfunction, no "lack of movement-open pump current circuit" malfunction, no UEGO circuit malfunction
Monitoring Duration	10 - 20 seconds to register a malfunction

Typical UEGO "Lack of Movement – Open Reference Ground Circuit " entry conditions (Bosch UEGO only):		
Entry condition	Minimum	Maximum
Closed Loop or Open Loop Requested due to UEGO sensor fault		
Constant lambda near stoich (~1)	0.99	1.01
Time since no lambda activity seen since start up	30 sec	
Time since no lambda activity during intrusive Stream 1 response monitor	3 sec	
Injector fuel pulsewidth	650 usec	
UEGO ASIC not in recalibration mode		
No air passing through during valve overlap (scavenging).		
Battery Voltage	11.0 Volts	18.0 Volts

Typical UEGO "Lack of Movement – Open Reference Ground Circuit" malfunction thresholds (Bosch UEGO only):
<p>Stage 1: > 20 seconds in test conditions without lambda movement during fuel control and reference current "defib" while in closed loop fuel and > 0.05 change in lambda movement.</p> <p>Stage 2: > 20 seconds in test conditions without lambda movement during reference current "defib" while open loop fuel is requested due to UEGO sensor fault and > 0.05 change in lambda movement.</p>

UEGO equipped vehicles monitor the circuitry between the PCM and the UEGO sensor via the wire diagnostics capability included on the UEGO ASIC chip. The wire diagnostics will detect wires (IP, IA, VM/COM, RE/VS) shorted to battery, or ground, and in most cases will detect open circuits (IP, VM/COM, RE/VS). The diagnostic bits are transmitted to the PCM via SPI (serial peripheral interface). The SPI communication is validated continuously, and if a SPI communication failure is detected, fault code(s) P064D and/or P064E will be set. The ASIC is also capable of detecting internal circuitry failure; in which case, an ASIC failure DTC (P1646, P1647) along with the SPI communication failure DTC (P064D, P064E) will be set.

UEGO "Wire Diagnostic via ASIC" Operation:	
DTCs	<p>P0131 – O2 circuit low voltage (Bank 1, Sensor 1). (Note: Sets for short to ground on Bosch UEGO- IP, IA, RE, VM; NTK UEGO – IP, VS, COM. Replaces P0130 in Bosch UEGO applications.)</p> <p>P0132 – O2 circuit high voltage (Bank 1, Sensor 1). (Note: Sets for short to battery on Bosch UEGO- IP, IA, RE, VM; NTK UEGO – IP, VS, COM. Replaces P0130 in Bosch UEGO applications.)</p> <p>P1646 – Linear O2 sensor control chip, Bank 1.</p> <p>P064D – Internal control module O2 sensor processor performance (Bank 1).</p>
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	UEGO heaters OK
Monitoring Duration	10 seconds to register a malfunction

Typical UEGO "Wire Diagnostic via ASIC" entry conditions:		
Entry condition	Minimum	Maximum
Fault reported by UEGO ASIC		
Battery Voltage	11.0 Volts	18.0 Volts

Typical UEGO "Wire Diagnostic via ASIC " malfunction thresholds:
UEGO ASIC indicated malfunction, DTC sets after 10 seconds when circuit failure is present.

Front UEGO Slow/Delayed Response Monitor (2010 MY and beyond)

The front UEGO monitor also detects malfunctions on the UEGO sensor such as reduced response or delayed response that would cause vehicle emissions to exceed 1.5x the standard (2.5x the standard for PZEV). The response rate is evaluated by entering a special 0.5 Hz square wave, fuel control routine. This routine drives the air/fuel ratio around stoichiometry at a calibratable frequency and magnitude, producing predictable oxygen sensor signal amplitude.

A UEGO slow or delayed sensor will show an increased response time which is compared to a no-fault polygon. Combinations of the rich to lean and lean to rich response times that fall outside the polygon indicate a sensor malfunction (P0133 Bank 1).


UEGO "Response Rate" Operation:	
DTCs	P0133 (slow/delayed response Bank 1)
Monitor execution	once per driving cycle
Monitor Sequence	> 30 seconds time in lack of movement test, > 30 seconds time in lack of switch test
Sensors OK	ECT, IAT, MAF, VSS, TP, ETC, VCT, VMV/EVMV, CVS, FTP, CKP, CMP, ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, no EVAP gross leak failure, UEGO heaters OK, no "lack of switching" malfunction, no "lack of movement" malfunction, no UEGO circuit malfunction, no UEGO FAOS monitor malfunction
Monitoring Duration	6 seconds

Typical UEGO "Response Rate" entry conditions:

Entry condition	Minimum	Maximum
Flex Fuel Composition not changing		
Not in Phase 0 of Evap Monitor, Purge intrusive test not running		
No Purge System reset		
Not performing CSER spark retard		
Not performing intrusive UEGO Lack of Movement "defib"		
No IMRC transition in progress before entering the monitor and while in monitor		
Air mass stability criteria met before entering the monitor and while in monitor		
Engine Coolant Temp	130 °F	240 °F
Intake Air Temp		140 °F
Time since entering closed loop fuel	10 seconds	
Inferred Catalyst Midbed Temperature		1600 °F
Fuel Level	15%	
Short Term Fuel Trim Range	-9%	5%
Short Term Fuel Trim Absolute Change while in monitor		15%
Air Mass	0.5 lbs/min	
Engine Load	25%	75%
Maximum change in engine load while in monitor		25%
Vehicle Speed	30 mph	80 mph
Maximum change in vehicle speed while in monitor		9 mph
Engine RPM	1000 rpm	2500 rpm
Maximum change in engine rpm while in monitor		500 rpm
Commanded versus actual lambda range while in monitor	0.85	1.15
Cam angle		60
Cam angle movement stability criteria met while in monitor		2.0
Battery Voltage	11.0 Volts	18.0 Volts

Typical UEGO "Response Rate" malfunction thresholds:

Threshold depends on failure type (symmetric slow/delay vs. asymmetric slow/delay)

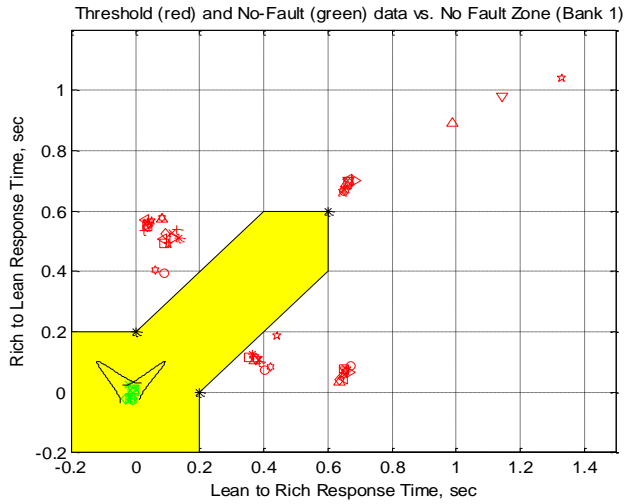

Example shown with lean-to-rich (0.2 sec), rich-to-lean (0.2 sec), and symmetric (0.6 sec) thresholds creating the yellow no-fault zone. The completed monitor results in two measurements, a lean-to-rich response time and a rich-to-lean response time. These response time values are used as x-y pairs to make a single point and then compared to the no-fault zone. Anywhere in the yellow is a pass and outside the yellow is a failure.

J1979 Front UEGO Mode \$06 Data

Monitor ID	Test ID	Description for CAN	
\$01	\$87	UEGO11 Rich to Lean Response Time	seconds
\$01	\$88	UEGO11 Lean to Rich Response Time	seconds

UEGO Heaters

The UEGO heater is controlled as a function of the measured impedance to keep the sensor at a near constant temperature (Bosch: 780 deg C, NTK: 800 deg C). The impedance of the Nernst cell decreases as the sensor temperature increases. This impedance is measured by periodically applying a small current across the Nernst cell and measuring the change in the voltage. The output voltage is then sent to an A/D input on the PCM. After a cold start, the UEGO heater ramps up to the maximum duty cycle to heat the sensor. After a few seconds, the measured impedance will start to decrease and when the target value is crossed, the heater goes into closed loop heater control to maintain the sensor at a near constant temperature.

The "UEGO Heater Temperature Control Monitor" tracks the time at the maximum duty cycle during the open loop sensor warm up phase. If the measured impedance does not come down to the target value to allow the system to transition from open loop heater control to closed loop heater control within a specified time, then a fault code is set. This monitor also sets a malfunction when the closed loop heater control reaches a maximum or minimum value for a period of time indicating that the controller is no longer able to maintain the target temperature, however, if the inferred exhaust temperature is high enough that the sensor will be above the target temperature even with no heat, then this monitor is disabled.

The UEGO heaters are also monitored for proper voltage and current. A UEGO heater voltage fault is determined by turning the heater on and off and looking for corresponding voltage change in the heater output driver circuit in the PCM.

A separate current-monitoring circuit monitors heater current once per driving cycle. This monitor normally runs in closed loop heater control after all the exhaust gas sensor functional tests are completed, however, it can also run intrusively. When the UEGO sensor indicates cold, but the heater is inferred to have been adequately warm, the current monitor is forced to run intrusively prior to the completion of the heater temperature control monitor. The heater current is actually sampled three times. If the current value for two of the three samples falls below or above a calibratable threshold, the heater is assumed to be degraded or malfunctioning. (Multiple samples are taken for protection against noise on the heater current circuit.)

UEGO Heater Monitor Operation:	
DTCs	P0030 Heater Temperature Control Failure, Bank 1 P0135 O2 Heater Circuit, Bank 1 P0053 O2 Heater Resistance, Bank 1
Monitor execution	once per driving cycle for heater current monitor, continuous for voltage monitoring and heater temperature control monitoring
Monitor Sequence	Heater current monitor: Stream 1 UEGO response test complete, Stream 2 and 3 HO2S functional tests complete, Stream 1 UEGO heater voltage check complete. Heater temperature control monitor: intrusive heater current monitor completed.
Sensors OK	Heater current monitor: no HO2S/UEGO heater circuit malfunction, Heater temperature control monitor: no UEGO circuit malfunction, no UEGO heater circuit malfunction, no UEGO heater current monitor DTCs.
Monitoring Duration	< 10 seconds for heater voltage check, < 5 seconds for heater current check, >= 30 seconds for the heater temperature control monitor to register a malfunction

Typical UEGO heater monitor entry conditions:

Entry condition	Minimum	Maximum
Inferred UEGO unheated tip temperature (heater voltage check only)	75 °F	1562 °F
Inferred UEGO heated tip temperature (heater current check only)	1346 °F	1526 °F
UEGO heater-on time (heater current check only)	30 seconds	
Engine RPM (heater current check only)		5000 rpm
Inferred UEGO unheated tip temperature (heater control monitor only)	75 °F	1000 °F
Battery Voltage	11.0 Volts	18.0 Volts

Typical UEGO heater check malfunction thresholds:

Smart driver status indicated malfunction (heater voltage check)

Number monitor retries allowed for malfunction > = 30 (heater voltage check)


Heater current outside limits:

< 1.0 amps or > 3 amps (intrusive test) or < 0.55 amps or > 3 amps (Bosch UEGO)

Heater temperature control monitor: > = 30 seconds to register a malfunction while the heater control integrator is at its maximum or minimum limit

J1979 UEGO Heater Mode \$06 Data

Monitor ID	Test ID	Description for CAN	Units
\$01	\$81	HO2S11 Heater Current	Amps
\$05	\$81	HO2S21 Heater Current	Amps

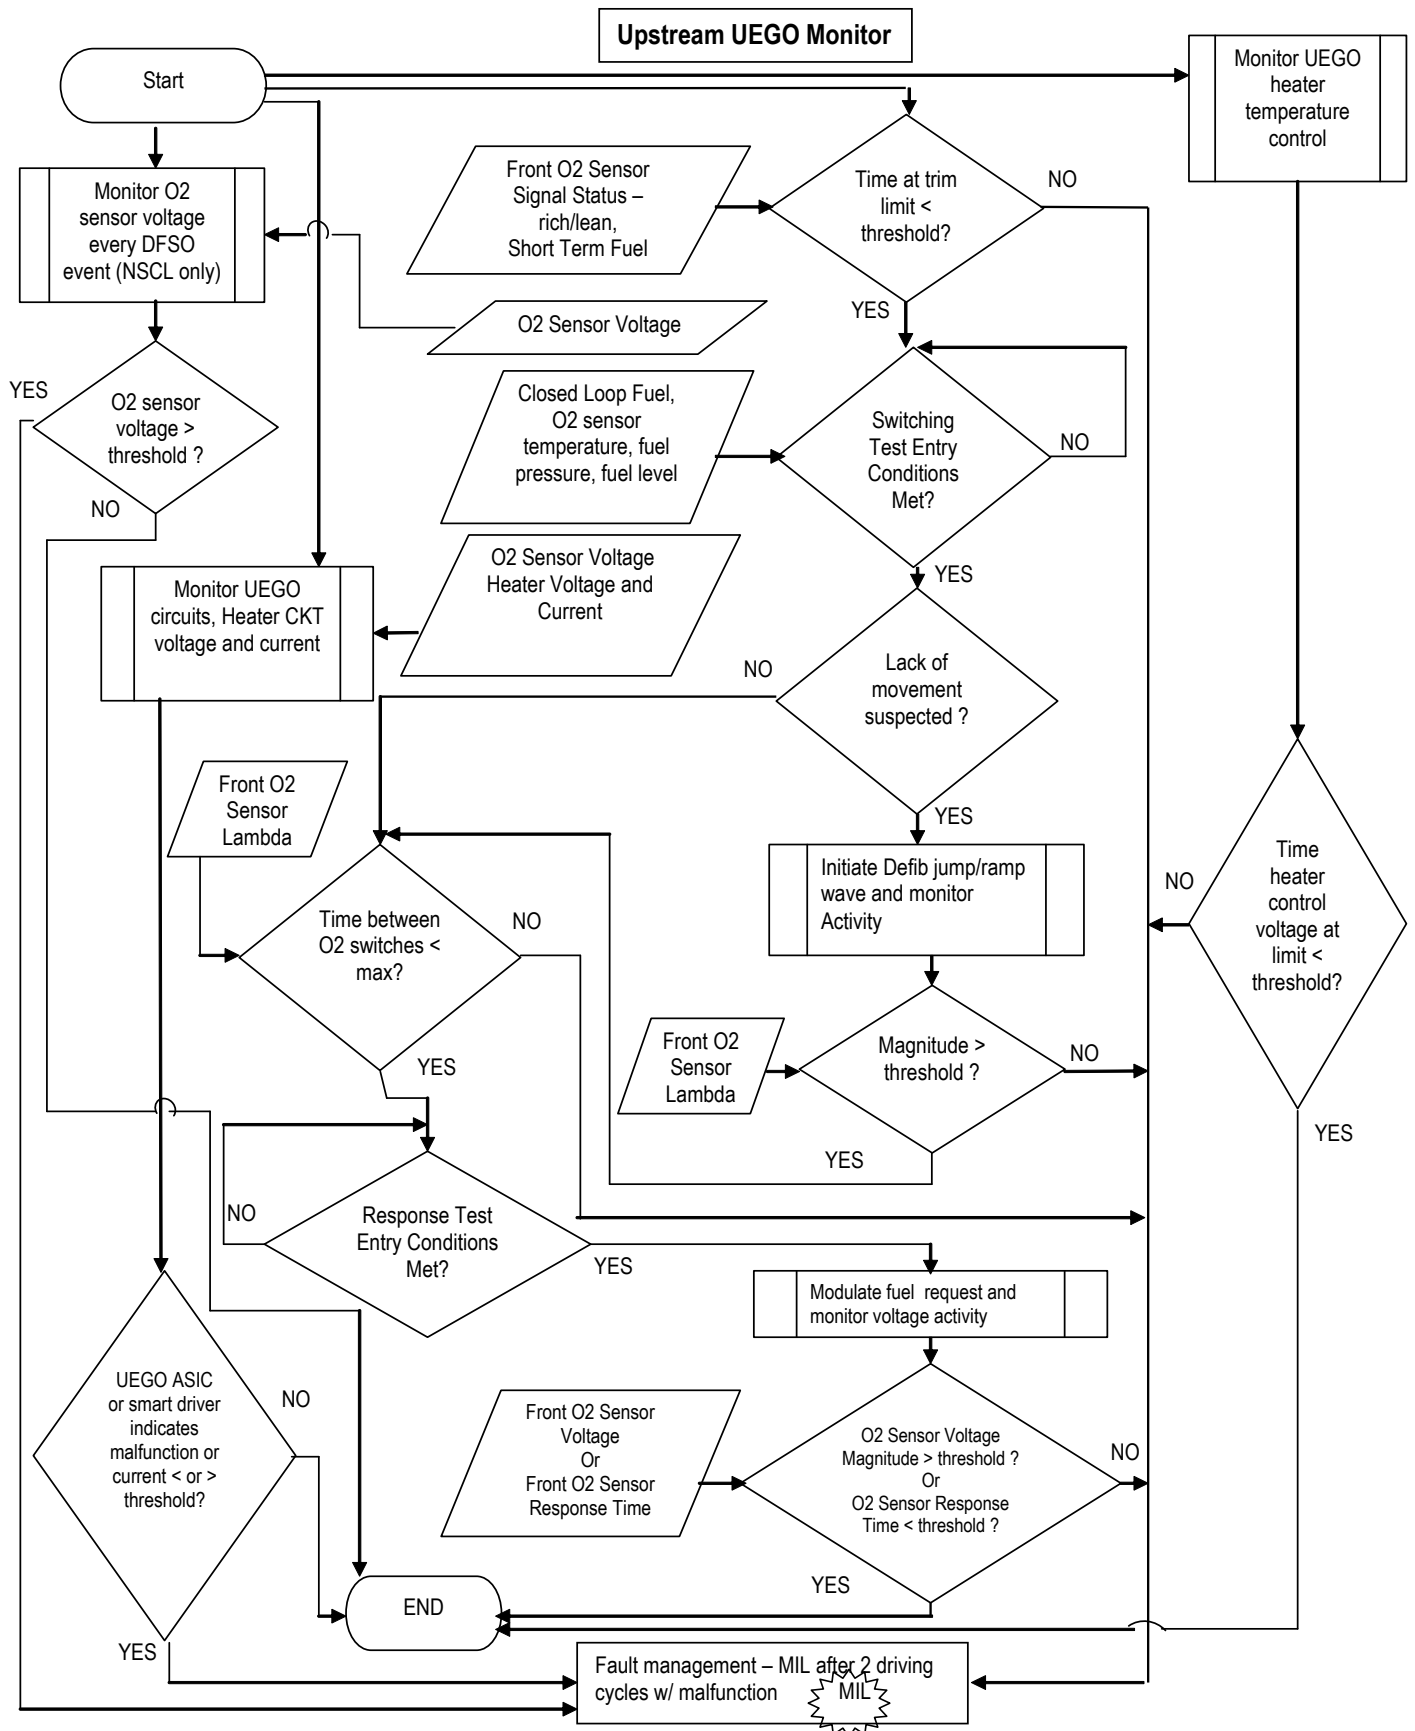

Rear HO2S Monitor

Rear HO2S Signal

A functional test of the rear HO2S sensors is done during normal vehicle operation. The peak rich and lean voltages are continuously monitored. Voltages that exceed the calibratable rich and lean thresholds indicate a functional sensor. If the voltages have not exceeded the thresholds after a long period of vehicle operation, the air/fuel ratio may be forced rich or lean in an attempt to get the rear sensor to switch. This situation normally occurs only with a green catalyst (< 500 miles). If the sensor does not exceed the rich and lean peak thresholds, a malfunction is indicated.

2005 MY and beyond vehicles will monitor the rear HO2S signal for high voltage, in excess of 1.1 volts and store a unique DTC. (P0138, P0158). An over voltage condition is caused by a HO2S heater or battery power short to the HO2S signal line.

Some Partial Zero Emission Vehicles (PZEV Focus) may utilize three sets of HO2S sensors. The front sensors (HO2S11/HO2S21) are the primary fuel control sensors. The next sensors downstream in the exhaust are utilized to monitor the light-off catalyst (HO2S12/HO2S22). The last sensors downstream in the exhaust (HO2S13/HO2S23) are utilized for very long term fuel trim in order to optimize catalyst efficiency (Fore Aft Oxygen Sensor Control). Ford's first PZEV vehicle uses a 4-cylinder engine so only the Bank 1 DTCs are utilized.

Rear HO2S Functional Check Operation:	
DTCs Sensor 2	P2270 HO2S12 Signal Stuck Lean P2271 HO2S12 Signal Stuck Rich
Monitor execution	once per driving cycle for activity test
Monitor Sequence	> 30 seconds time in lack of movement test (UEGO only), > 30 seconds time in lack of switch test, front HO2S/UEGO response test complete
Sensors OK	ECT, IAT, MAF, VSS, TP, ETC, FRP, DPFE EGR, VCT, VMV/EVMV, CVS, FTP, CKP, CMP, ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, no EVAP gross leak failure, UEGO/HO2S (front and rear) heaters OK, no "lack of switching" malfunction, no "lack of movement" malfunction (UEGO only), no UEGO/HO2S (front and rear) circuit malfunction, no UEGO FAOS monitor malfunction, no front HO2S/UEGO response rate malfunction
Monitoring Duration	continuous until monitor completed

Typical Rear HO2S functional check entry conditions:

Entry condition	Minimum	Maximum
Stream 1 HO2S not in CSD recovery mode		
Flex Fuel Composition not changing		
Not in Phase 0 of Evaporative System Monitor		
No Purge System reset		
Purge intrusive test not running		
Not performing CSER spark retard		
Engine Coolant Temp	125 °F	240 °F
Intake Air Temp		140 °F
Time since entering closed loop fuel	10 seconds	
Inferred Catalyst Midbed Temperature		1600 °F
Heater-on Inferred Sensor(s) 2/3 HO2S Temperature Range	400 °F	1400 °F
Sensor(s) 2/3 HO2S heater-on time	90 seconds	
Short Term Fuel Trim Range	-5%	5%
Fuel Level (forced excursion only)	15%	
Inferred exhaust temperature range	400 °F	1400 °F
Throttle position	Part throttle	
Engine RPM (forced excursion only)	1000 rpm	2000 rpm
Battery Voltage	11.0 Volts	18.0 Volts

Typical Rear HO2S functional check malfunction thresholds:

Does not exceed rich and lean threshold envelope:

Rich < 0.42 volts

Lean > 0.48 volts

J1979 Rear HO2S Functional Check Mode \$06 Data

Monitor ID	Test ID	Description for CAN	
\$02	\$01	HO2S12 sensor switch-point voltage	volts
\$06	\$01	HO2S22 sensor switch-point voltage	volts
\$03	\$01	HO2S13 sensor switch-point voltage	volts
\$07	\$01	HO2S23 sensor switch-point voltage	volts

Rear HO2S "Over Voltage Test" Operation:

DTCs	P0138 HO2S12 Over voltage
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	rear HO2S heaters OK
Monitoring Duration	10 seconds to register a malfunction

Typical HO2S "Over Voltage Test" entry conditions:

Entry condition	Minimum	Maximum
Inferred Stream 2 HO2S Temperature	400 °F	
Battery Voltage	11.0 Volts	18.0 Volts

Typical HO2S "Over Voltage Test" malfunction thresholds:

> 1.1 volts for 10 seconds for over voltage test


Rear HO2S Decel Fuel Shut Off Response Test

The catalyst monitor tracks and uses the length of the rear HO2S signal. The rear HO2S is also known as the Catalyst Monitor Sensor (CMS). As the catalyst ages, air/fuel fluctuations begin to break through the catalyst and the length of this signal increases. Eventually the length of the CMS signal becomes long enough to identify a failure for the catalyst monitor.

When an HO2S sensor degrades, its response to air/fuel fluctuations slows down. The effect of a slow rear HO2S sensor on the catalyst monitor is to reduce the length of the signal. A slow CMS sensor, therefore, may cause the catalyst monitor to incorrectly pass a failed catalyst. The purpose of the Rear DFSO Response diagnostic is to ensure the catalyst monitor has a valid CMS sensor with which to perform the catalyst monitor diagnostic. The monitor is set to trigger at the level of degradation that will cause the catalyst monitor to falsely pass a malfunction threshold catalyst.

The OBD-II regulations require this monitor to utilize Decel Fuel Shut Off (DFSO). Ford plans to aggressively use DFSO starting in the 2009 MY on many applications to improve fuel economy. The DFSO rear O2 response test will be phased in coincident with this feature.

The main part of the test is the measured rich to lean response rate. It is determined by a "slew" rate calculation which determines the rich to lean slope of the sensor during a Decel Fuel Shut Off (DFSO) event which occurs during closed pedal at vehicle speeds higher than 28 mph. The calculation for the slew rate (mV/sec) is illustrated below.

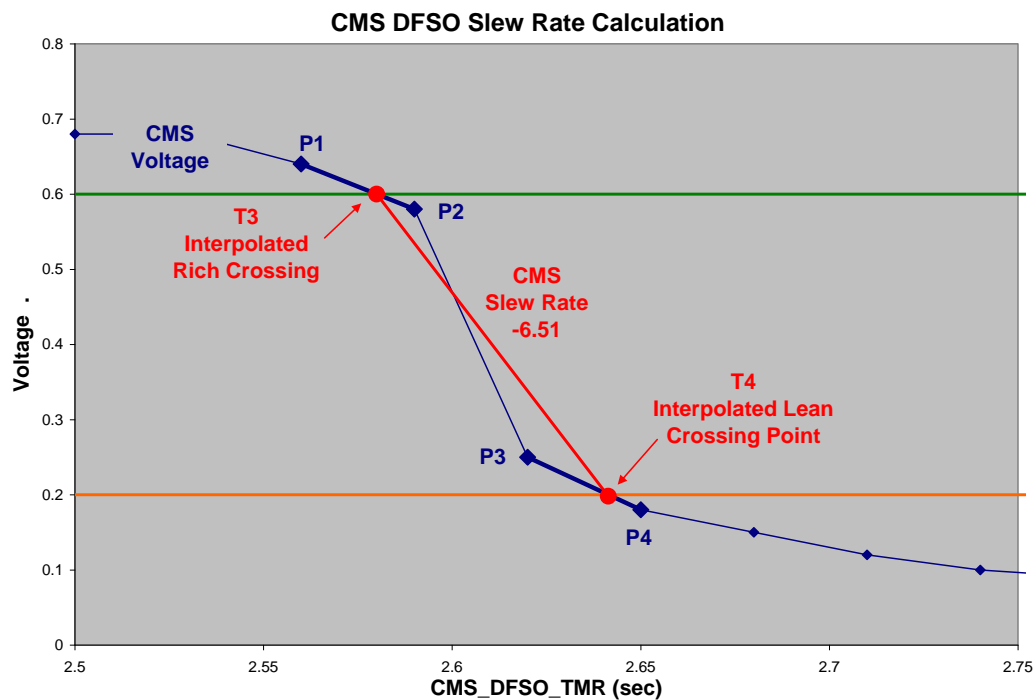


Linear interpolation is performed to calculate the Slew Rate.

1. Interpolate between points P1 and P2 to determine the time at which the rich limit threshold of 0.6 volts was crossed.
2. Interpolate between points P3 and P4 to determine the time at which the lean limit threshold of 0.2 volts was crossed.
3. Use the Interpolated times and the thresholds to calculate the slope or "slew rate" of the CMS sensor from 0.6 to 0.2 volts.

Diagnostic Data Acquisition Event Plot is a schematic of what happens when the pedal is closed and the engine enters DFSO.

CMS DFSO Diagnostic Event Plot

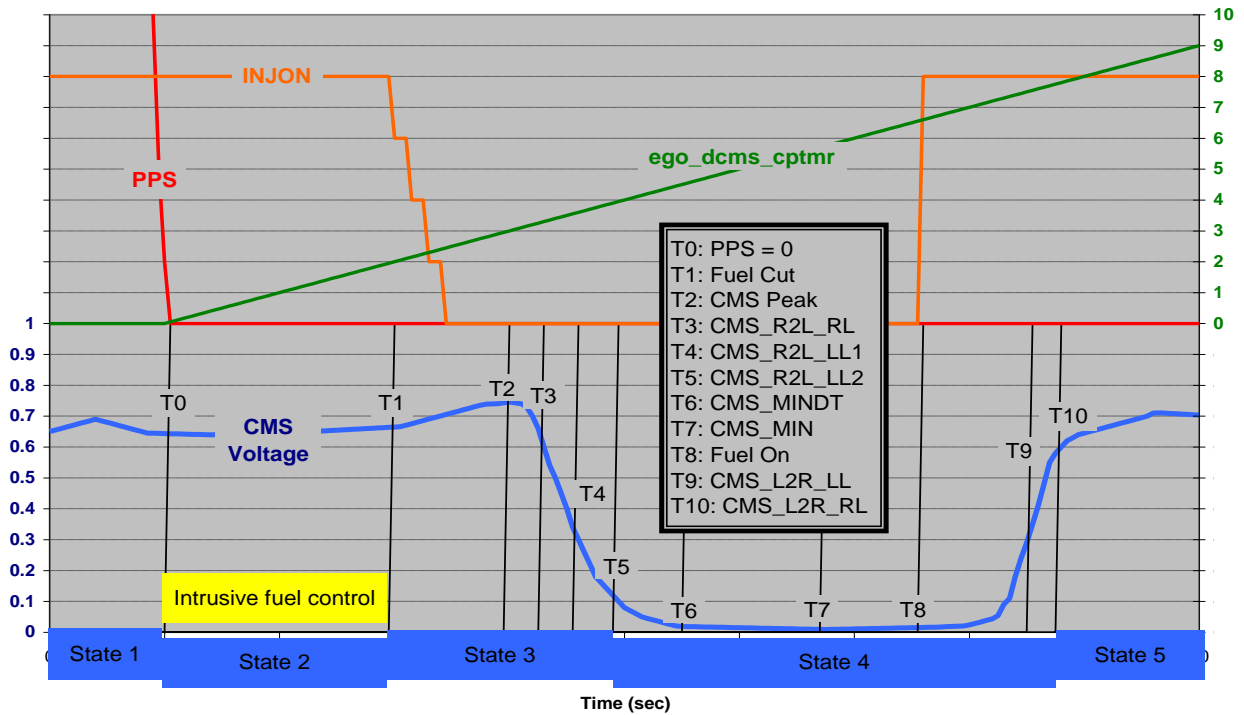

The top half of the graph shows the following signals:

Closed pedal timer (ego_dcms_cptmr).

PPS (Pedal Position Sensor)


INJON (# of fuel injectors turned on)

The bottom half of the graph shows a CMS signal with black lines and a "Tx" number representing all of the points of interest where the monitor captures data.

The monitor measures the CMS Rich to Lean slew rate during a DFSO event. The CMS voltage must be rich prior to the injector cut for a valid measurement event. Each fuel cut can only yield 1 valid event. The monitor will complete after 3 valid events. Additional valid event results will be stored and applied over the next drive cycle if necessary for monitor completion.

The slope or slew rate of the CMS sensor going from rich to lean is a negative number with the units of mVolts/sec. The measured slew rate changes as an O2 sensor degrades, but it will also change as a function of catalyst oxygen storage/age; therefore, the slew rate is normalized using an offset based on catalyst oxygen storage/age. The catalyst oxygen storage/age is calculated by integrating the level of oxygen mass in the exhaust stream from the time the injectors turn off to the time where the slew rate calculation begins. The fault line (red line in the chart below) is calibrated to 80% of the fault distribution for various levels of oxygen storage/catalyst age. As shown below, the integrated oxygen mass becomes smaller with catalyst age.

The final output of the monitor = the measured slew rate – normalized fault line, therefore, any positive number will represent a fault. For the step change logic the fault threshold will represent 50% of the failed distribution (~0.3).

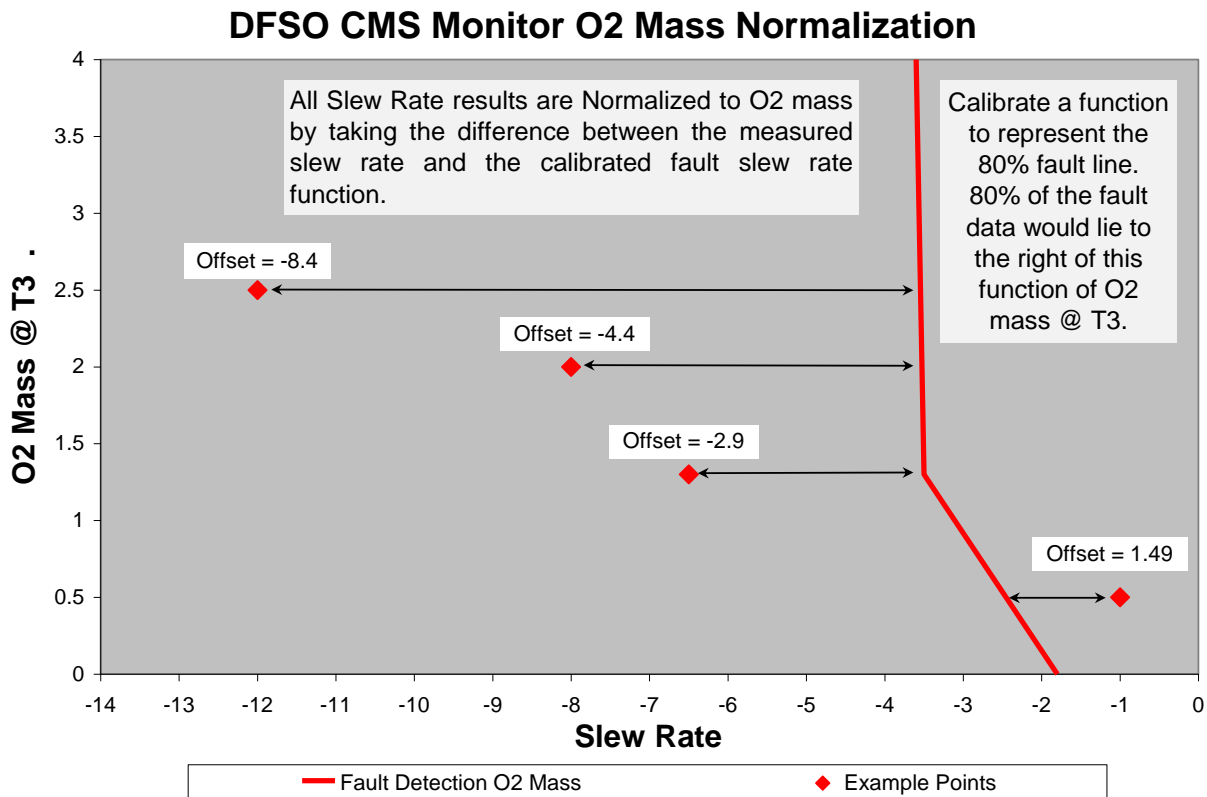

The delayed response part of the test indicates that the sensor is stuck in range. The code sets if the sensor can't get above a calibrated rich or lean voltage prior to a calibrated time out period. This time out must happen three times in a row to set the fault. If it happens once or twice and then the response monitor completes, the counter will be reset and the sensor will have to fail 3 times in a row to again set the DTC.

Due to the fact that intrusively driving the CMS sensor rich will cause drivability and emission concerns, there are other several condition counters that have to fail prior to intrusively forcing the sensor to go rich. The sequence of events to get to the rich failure is shown below:

- Initially, in order to avoid excess emissions, the monitor will only run if the CMS voltage is rich (> 0.6 volts) or CMS sensor is transitioning from lean to rich (large positive slope . 0.2).
 - Successive failures are counted up; when the count exceeds 5 to 10 failures the monitor will now intrusively force rich fuel to run the test.
- In order to avoid a drivability issues as a result of a lean shifted bank, the first phase of intrusive control has a short time out (1 to 2 seconds).
 - Successive failures are counted up; when the count exceeds 3 failures the monitor will now intrusively force rich fuel to failure or a rich sensor.
- All controllable measures have failed to force the sensor to switch, so the strategy will drive rich until the sensor switches or the failure time out is exceeded (5 to 10 seconds).
 - Successive failures are counted up; when the count exceeds 3 failures the monitor will now set a fault (P013E for bank 1 or P014A for bank 2).

If the sensor is stuck rich (can't get lean) the fault procedure is:

- While the injectors remain off, the sensor must get lean (<0.1 volts) prior to the failure time which must be set to account for a green catalyst (5 to 10 seconds).
 - Successive failures are counted up; when the count exceeds 3 failures the monitor will now set a fault (P013E for bank 1 or P014A for bank 2).

EWMA Fault Filtering

The EWMA logic incorporates several important CARB requirements. These are:

- Fast Initial Response (FIR): The first 4 tests after a battery disconnect or code clear will process unfiltered data to quickly indicate a fault. The FIR will use a 2-trip MIL. This will help the service technician determine that a fault has been fixed.
- Step-change Logic (SCL): The logic will detect an abrupt change from a no-fault condition to a fault condition. The SCL will be active after the 4th DCMS monitor cycle and will also use a 2-trip MIL. This will illuminate the MIL when a fault is instantaneously induced.
- Normal EWMA (NORM): This is the normal mode of operation and uses an Exponentially Weighted Moving Average (EWMA) to filter the EONV test data. It is employed after the 4th EONV test and will illuminate a MIL during the drive cycle where the EWMA value exceeds the fault threshold. (1 trip MIL).

Rear O2 DFSO Response Monitor Operation:	
DTCs	P013A - O2 Sensor Slow Response - Rich to Lean (Bank 1 Sensor 2) P013E - O2 Sensor Delayed Response - Rich to Lean (Bank 1 Sensor 2) (sensor stuck in range)
Monitor execution	Once per driving cycle, after 3 DFSO events.
Monitor Sequence	> 30 seconds time in lack of movement test (UEGO only), > 30 seconds time in lack of switch test, front HO2S/UEGO response test complete, HO2S 2 and 3 functional tests complete, HO2S/UEGO heater voltage and current checks complete, FAOS monitor system bias maturity met (UEGO applications only)
Sensors OK	ECT, IAT, MAF, VSS, TP, ETC, FRP, EGR, VCT, VMV/EVMV, CVS, FTP, CKP, CMP, ignition coils, injectors, no misfire DTCs, no system failures affecting fuel, no EVAP gross leak failure, UEGO heaters OK, rear HO2S heaters OK, no "lack of switching" malfunction, no "lack of movement" malfunction, no UEGO circuit malfunction, no rear stream 2 HO2S circuit malfunction, no rear stream 2 HO2S functional DTCs, Not performing CSER spark retard. Flex fuel composition not changing. No intrusive EGO monitors running.
Monitoring Duration	3 DFSO events.

Typical DFSO Response Monitor entry conditions:		
Entry condition	Minimum	Maximum
Air Mass	0.2	7
Vehicle Speed		90
Inlet Air Temp		140
Engine Coolant Temp	130 °F	240 °F
Catalyst Temperature (Inferred)	800 °F	1600 °F
Rear Ego Tip Temperature (Inferred)	800 °F	
Fuel Level	15%	
Fuel In Control	-9%	5%
Adaptive Fuel Within Limits	-5%	5%
Battery Voltage	11.0 Volts	18.0 Volts
Rich Voltage on downstream CMS sensor(s)	0.6 Volts	
Rich Voltage on upstream HEGO / UEGO sensor(s)	0.45 Volts (HEGO)	1 (UEGO)

Typical DFSO response rate malfunction thresholds:

Rich to lean slew rate thresholds:

Normal Threshold	= > 0.0 mV/sec
Fast Initial Response Threshold	= > 0.0 mV/sec
Step Change Threshold	= > 0.3 mV/sec

Note that the thresholds use a normalized offset and the threshold is set at "zero".

Typical DFSO delayed response malfunction thresholds:

Successive failures are counted up (5 to 10 faults). Monitor will now intrusively force rich fuel to run the test.

Intrusive controls will time out based on drivability (1 to 2 sec).

Successive drivability failures are counted up (3 faults).

Intrusive controls will now time out at a slower time (5 to 10 sec) and count a fault. After 3 faults are counted, a DTC is set.

J1979 DFSO response rate Mode \$06 Data

Monitor ID	Test ID	Description for CAN	
\$02	\$85	HO2S12 Fuel Shut off Rich to Lean Response Rate	mV/sec
\$02	\$86	HO2S12 Fuel Shut off Rich to Lean Response Time	msec
\$06	\$85	HO2S22 Fuel Shut off Rich to Lean Response Rate	mV/sec
\$06	\$86	HO2S22 Fuel Shut off Rich to Lean Response Time	msec

Rear HO2S Heaters,

The HO2S heaters are monitored for proper voltage and current. A HO2S heater voltage fault is determined by turning the heater on and off and looking for corresponding voltage change in the heater output driver circuit in the PCM.

A separate current-monitoring circuit monitors heater current once per driving cycle. The heater current is actually sampled three times. If the current value for two of the three samples falls below a calibratable threshold, the heater is assumed to be degraded or malfunctioning. (Multiple samples are taken for protection against noise on the heater current circuit.)

HO2S Heater Monitor Operation:	
DTCs Sensor 2	P0141 O2 Heater Circuit, Bank 1 P0054 O2 Heater Resistance, Bank 1
Monitor execution	once per driving cycle for heater current, continuous for voltage monitoring
Monitor Sequence	Heater current monitor: Stream 1 HO2S/UEGO response test complete, Stream 2 and 3 HO2S functional tests complete, HO2S/UEGO heater voltage check complete
Sensors OK	Heater current monitor: no HO2S/UEGO heater voltage DTCs
Monitoring Duration	< 10 seconds for heater voltage check, < 5 seconds for heater current check

Typical HO2S heater monitor entry conditions:		
Entry condition	Minimum	Maximum
Inferred HO2S 2/3 Temperature (heater voltage check only)	400 °F	1400 °F
Inferred HO2S 2 Temperature (heater current check only)	250 °F	1400 °F
Inferred HO2S 3 Temperature (heater current check only)	250 °F	1400 °F
HO2S 1/2/3 heater-on time (heater current check only)	30 seconds	
Engine RPM (heater current check only)		5000 rpm
Battery Voltage (heater voltage check only)	11.0	18.0 Volts

Typical HO2S heater check malfunction thresholds:

Smart driver status indicated malfunction

Number monitor retries allowed for malfunction > = 30

Heater current outside limits: < 0.220 amps or > 3 amps, (NTK)
 < 0.400 amps or > 3 amps, (Bosch)
 < 0.465 amps or > 3 amps, (NTK Fast Light Off)
 < 0.230 amps or > 3 amps, (Bosch Fast Light Off)


J1979 HO2S Heater Mode \$06 Data

Monitor ID	Test ID	Description for CAN	Units
\$02	\$81	HO2S12 Heater Current	Amps
\$06	\$81	HO2S22 Heater Current	Amps
\$03	\$81	HO2S13 Heater Current	Amps
\$07	\$81	HO2S23 Heater Current	Amps

Stepper Motor EGR System Monitor

The Electric Stepper Motor EGR System uses an electric stepper motor to directly actuate an EGR valve rather than using engine vacuum and a diaphragm on the EGR valve. The EGR valve is controlled by commanding from 0 to 52 discrete increments or “steps” to get the EGR valve from a fully closed to fully open position. The position of the EGR valve determines the EGR flow. Control of the EGR valve is achieved by a non-feedback, open loop control strategy. Because there is no EGR valve position feedback, monitoring for proper EGR flow requires the addition of a MAP sensor.

Stepper Motor EGR System

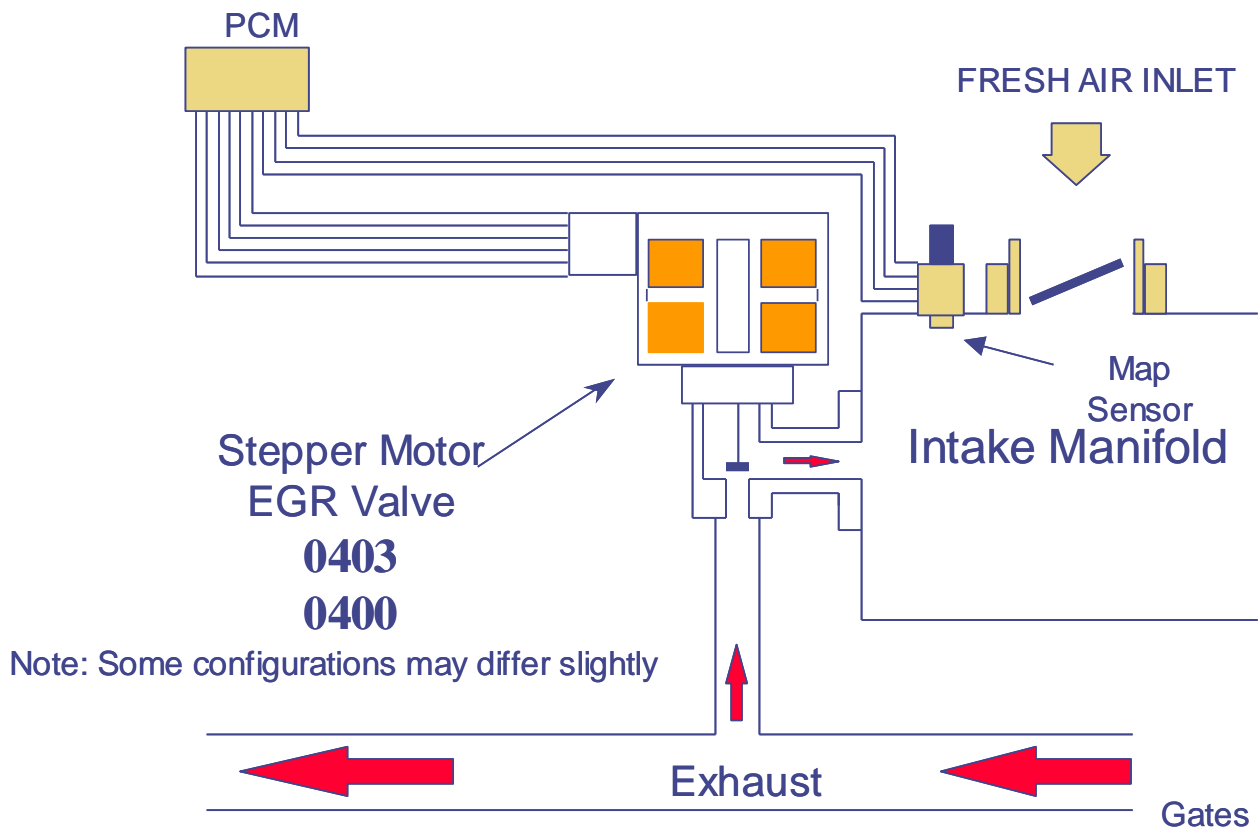

The Stepper Motor EGR Monitor consists of an electrical and functional test that checks the stepper motor and the EGR system for proper flow.

The stepper motor electrical test is a continuous check of the four electric stepper motor coils and circuits to the PCM. A malfunction is indicated if an open circuit, short to power, or short to ground has occurred in one or more of the stepper motor coils for a calibrated period of time. If a malfunction has been detected, the EGR system will be disabled, and additional monitoring will be suspended for the remainder of the driving cycle, until the next engine start-up.

EGR Stepper Monitor Electrical Check Operation:	
DTCs	P0403
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	
Monitoring Duration	4 seconds to register a malfunction

Stepper motor electrical check entry conditions:
Battery voltage > 11.0 volts

Typical EGR electrical check malfunction thresholds:
“Smart” Coil Output Driver status indicates open or short to ground, or short to power

EGR flow is monitored using an analog Manifold Absolute Pressure Sensor (MAP). If a malfunction has been detected in the MAP sensor, the EGR monitor will not perform the EGR flow test.

The MAP sensor is checked for opens, shorts, or out-of-range values by monitoring the analog-to-digital (A/D) input voltage.

MAP Sensor Check Operation	
DTCs	P0107 (low voltage), P0108 (high voltage)
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	not applicable
Monitoring Duration	5 seconds to register a malfunction

MAP electrical check entry conditions:
Battery voltage > 11.0 volts

Typical MAP sensor check malfunction thresholds:
Voltage < 0.19 volts or voltage > 4.88 volts

The MAP sensor is also checked for rational values. The value of inferred MAP is checked against the actual value of MAP at idle and non-idle engine operating conditions.

MAP Sensor Rationality Check Operation	
DTCs	P0106
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	10 seconds to register a malfunction

Typical MAP Rationality check entry conditions:		
Entry Conditions	Minimum	Maximum
Change in load		5%
Engine rpm	975 rpm	1650 rpm
Throttle Angle	1.5 degrees	83 degrees

Typical MAP Rationality check malfunction thresholds:
Difference between inferred MAP and actual MAP > 8 in Hg

The MAP sensor is also checked for intermittent MAP faults.

MAP Sensor Intermittent Check Operation	
DTCs	P0109 (non-MIL)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	2 seconds to register a malfunction

Typical MAP Intermittent check malfunction thresholds:
Voltage < 0.024 volts or voltage > 4.96 volts

When EGR is delivered into the intake manifold, intake manifold vacuum is reduced and thus manifold absolute pressure (MAP) is increased. A MAP sensor and inferred MAP are used by this monitor to determine how much EGR is flowing. A MAP sensor located in the intake manifold measures the pressure when EGR is being delivered and when EGR is not being delivered. The pressure difference between EGR-on and EGR-off is calculated and averaged. If the vehicle also has a MAF sensor fitted, then the monitor also calculates and averages an inferred MAP value in the above calculation and resulting average. After a calibrated number of EGR-on and EGR-off cycles are taken, the measured and inferred MAP values are added together and compared to a minimum threshold to determine if a flow failure (P0400) in the EGR system has occurred.

EGR Flow Check Operation:	
DTCs	P0400
Monitor execution	once per driving cycle
Monitor Sequence	None
Sensors OK	CPS, ECT, IAT, MAF, MAP (P0106/7/8), TP, BARO not available yet
Monitoring Duration	200 seconds (600 data samples)

Typical EGR flow check entry conditions:		
Entry Condition	Minimum	Maximum
Inferred Ambient Air Temperature	38 °F	200 °F
Engine Coolant Temperature	130 °F	240 °F
Desired EGR ass	0.1 lbm/min	
Engine RPM Steady (change/0.100 sec)		250 rpm
MAP Steady (change/0.100 sec)		0.35 in Hg
Engine Load Steady (change/0.100 sec)		10 %
BARO	22.5 "Hg	
Intake Manifold Vacuum	3.5 "Hg	12.0 "Hg
Vehicle Speed	25 MPH	80 MPH
Engine Throttle Angle steady(absolute change)	0.0 degrees	4.0 degrees
Purge Flow Rate		1 lbs/min

Typical EGR flow check malfunction thresholds:
< 1.0 MAP differential

J1979 Mode \$06 Data			
Monitor ID	Test ID	Description for CAN	Units
\$33	\$82	Normalized MAP differential (range 0 – 2)	None

I/M Readiness Indication



If the inferred ambient temperature is less than 20 °F, greater than 130 °F, or the altitude is greater than 8,000 feet (BARO < 22.5 "Hg), the EGR flow test cannot be reliably done. In these conditions, the EGR flow test is suspended and a timer starts to accumulate the time in these conditions. If the vehicle leaves these extreme conditions, the timer starts decrementing, and, if conditions permit, will attempt to complete the EGR flow monitor. If the timer reaches 800 seconds, the EGR flow test is disabled for the remainder of the current driving cycle and the EGR Monitor I/M Readiness bit will be set to a "ready" condition after one such driving cycle. Two such consecutive driving cycles are required for the EGR Monitor I/M Readiness bit to be set to a "ready" condition.



PCV System Monitor

The PCV valve is installed into an oil separator that is bolted to the side of the block. The PCV valve is designed to last the full useful life of the engine and is not designed to be removed from the oil separator. The PVC valve is connected to the intake manifold hose using a quick connect. Because the PCV valve cannot be removed from the oil separator, the quick connect will be disconnected in the event vehicle service is required. Molded plastic lines are used from the PCV valve to the intake manifold. The diameter of the lines and the intake manifold have been increased to 0.625" so that inadvertent disconnection of the quick connect will cause either an immediate engine stall or will not allow the engine to be restarted. The crank case ventilation hose on the cam cover is connected to the air induction system using quick connects. The cam cover also incorporates an oil separator.

In the event that the vehicle does not stall if the line between the intake manifold and PCV valve is disconnected, the vehicle will have a large vacuum leak that will cause the vehicle to run lean at idle. This will illuminate the MIL after two consecutive driving cycles and will store one or more of the following codes: Lack of O2 sensor switches, Bank 1 (P2195), Fuel System Lean, Bank 1 (P0171).

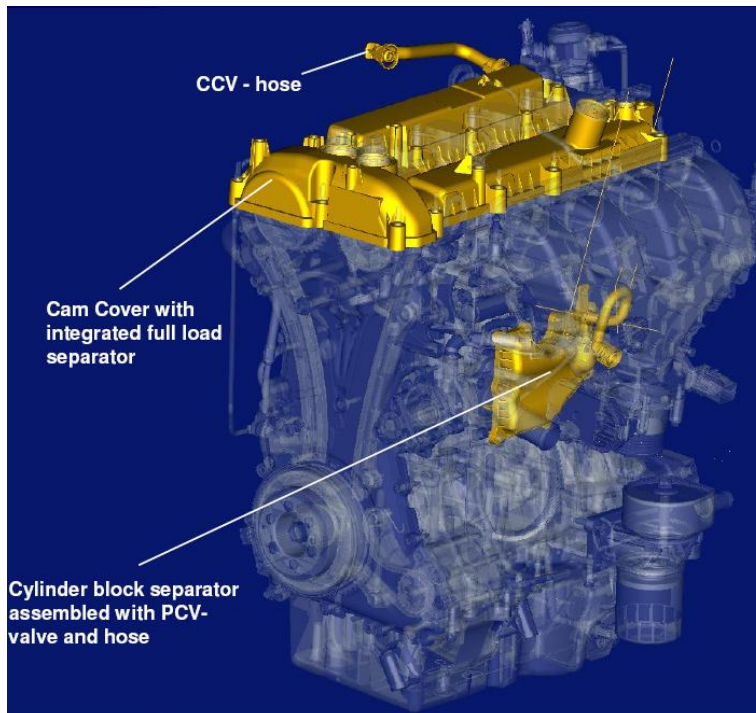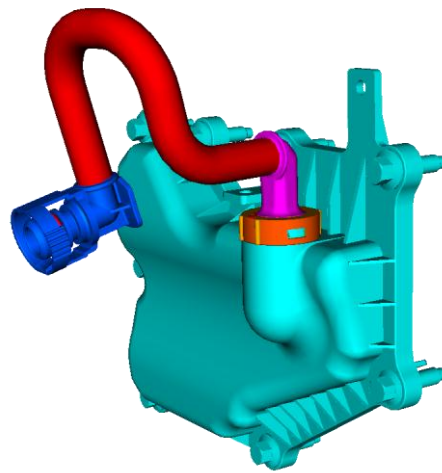


Enhanced Thermostat Monitor


For the 2009 MY, the thermostat test has been enhanced to reduce the time it takes to identify a malfunctioning thermostat. The enhanced monitor includes a model which infers engine coolant temperature.

During a cold start, when the thermostat should be closed, the monitor uses a model of ECT to determine whether actual ECT should have crossed the Warm Up Temperature (WUT) threshold.

Engine Cooling System

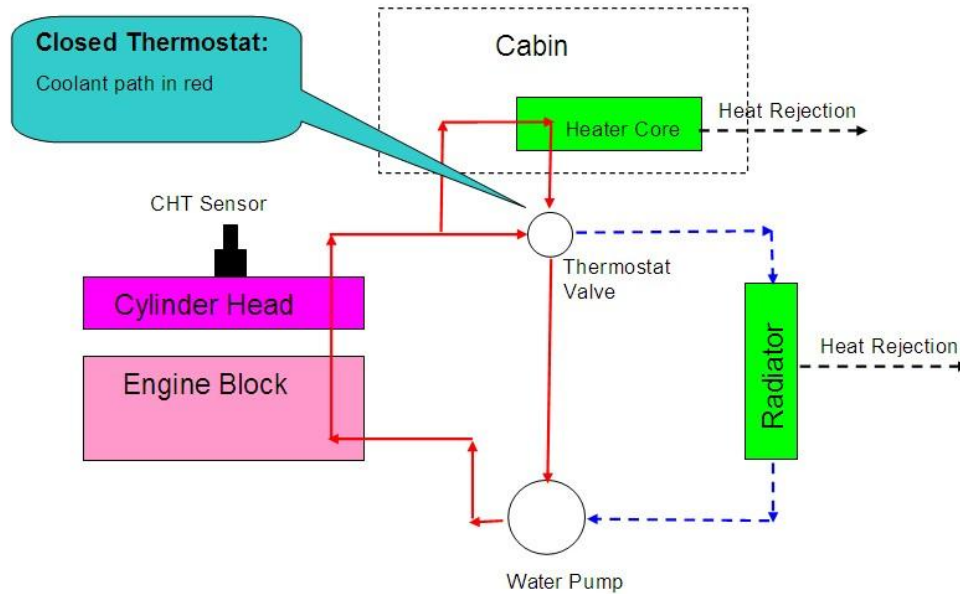

Once the ECT model exceeds the thermostat regulating temperature for 3 seconds, measured ECT is compared to the WUT threshold to determine if ECT has warmed up enough. If ECT has warmed up to at least the WUT threshold, the thermostat is functioning properly. If ECT is too low, the thermostat is most likely stuck open and a P0128 is set.

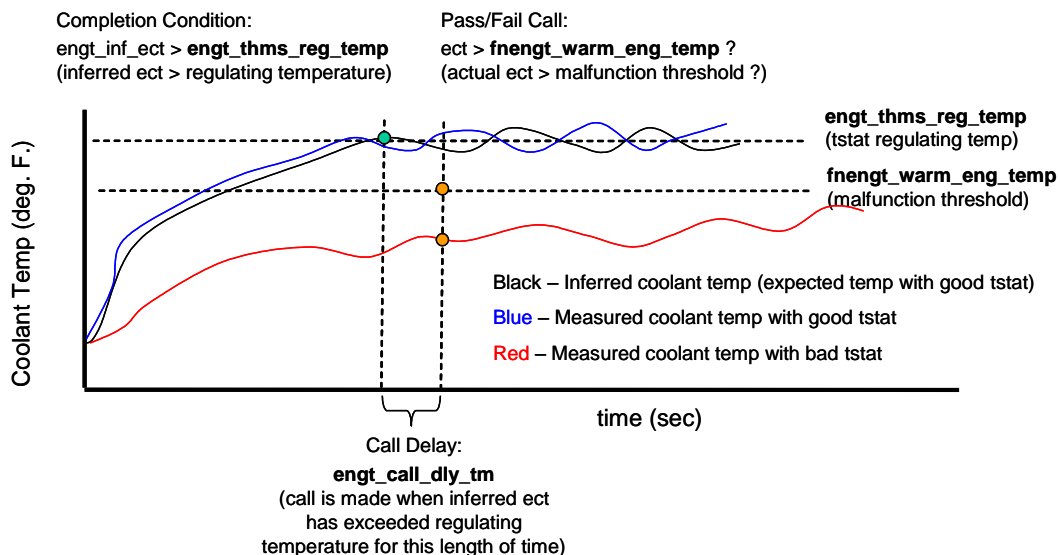

The WUT threshold is normally set to 20 degrees F below the thermostat regulating temperature.

There are some circumstances that could lead to a false diagnosis of the thermostat. These are conditions where the vehicle cabin heater is extracting more heat than the engine is making. One example where this can occur is on large passenger vans which have "dual" heaters, one heater core for the driver and front passengers and another heater core for the passengers in the rear of the vehicle. At very cold ambient temperatures, even a properly functioning thermostat may never warm up to regulating temperature. Another example is a vehicle that is started and simply sits at idle with the heater on high and the defroster fan on high.

There are two features that are used to prevent a false thermostat diagnosis. For vehicles with dual heaters, the WUT threshold is reduced at cold ambient temperatures below 50 deg F. For cases where the engine is not producing sufficient heat, a timer is used to track time at idle or low load conditions (e.g. decels). If the ratio of time at idle/low load versus total engine run time exceeds 50% at the time the fault determination is made, the thermostat diagnostic does not make a fault determination for that driving cycle, i.e. "no-call".

THERMOSTAT MONITOR OPERATION	
DTC	P0128 - Coolant Thermostat (Coolant temperature below thermostat regulating temperature)
Monitor Execution	Once per driving cycle, during a cold start
Monitoring Duration	Drive cycle dependent. Monitor completes in less than 300 seconds when inferred ECT exceeds threshold(at 70 deg F ambient temperature)

TYPICAL THERMOSTAT MONITOR ENTRY AND COMPLETION CONDITIONS		
Entry conditions	Minimum	Maximum
Engine Coolant Temperature at start	None	125 °F
Intake Air Temperature at start (ambient temp)	20 °F	None
Inferred Percent Ethanol (flex fuel vehicles only)	Learned	N/A
Completion condition	Minimum	Maximum
Modeled ECT	180 °F	None
Time Since Modeled ECT Exceeded WUT Threshold	3 sec.	None
Time at Idle/Low Load Compared with Total Engine Run Time	None	50%


TYPICAL MALFUNCTION THRESHOLD
Engine Coolant Temperature < 160 °F (for the 180 °F thermostat)

HEV/PHEV Cooling System Diagnostics

The cooling system in the Plug-in Hybrid has been designed to include two functional cooling loops. This system is designed to maximize cooling efficiency when the vehicle is running on either the gas engine or the electric motor. The system operates in one of two different modes.

The first mode is the main or "combined" cooling loop mode which provides coolant flow through both the gas engine and the cabin heater core. While in this loop, both the gas engine and an electric heater can be used to maximize the heat transfer to the coolant thus providing both an increase in the engine metal temperature and heat for the vehicle cabin.

The second cooling mode is the "isolated" loop mode where coolant flow through the cabin heater core is isolated from the engine block. This loop is intended to provide cabin heat when the gas engine is not running. Coolant flow is maintained in the "combined" loop by default (isolation valve de-energized), and by energizing the isolation valve coolant flow is maintained in the "isolated" loop.

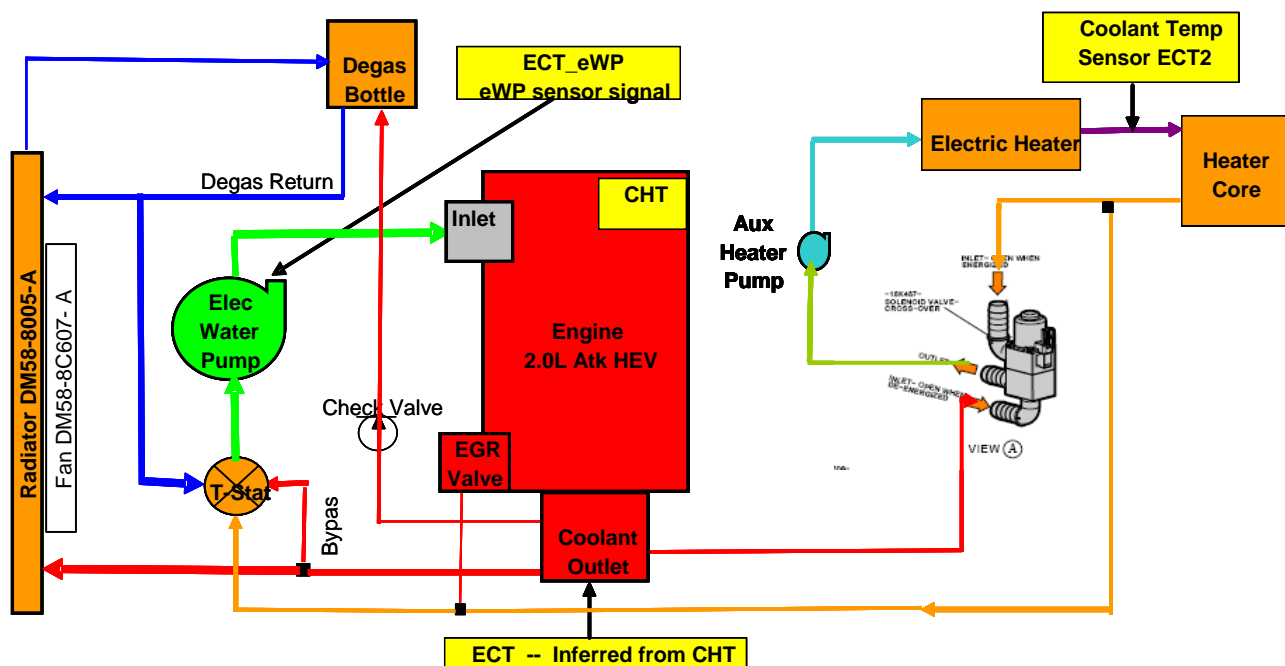

While in the "combined" cooling loop, coolant flow is maintained by a PCM-controlled Engine Coolant Pump (internally known as the electric Water Pump (eWP)). The Engine Coolant Pump is a pulse width modulated pump that can be used to control coolant flow rates independent of engine speed. This allows the PCM to maximize fuel economy by minimizing cooling system power consumption as compared to a traditional belt-driven water pump. Additionally, it can be used to improve engine metal temperature heating/cooling rates. Even though the Engine Coolant Pump can provide coolant flow while the engine is off, its primary purpose is to provide coolant flow while the engine is running. A low power consumption auxiliary water pump in the "isolation" loop is the primary source of coolant flow for cabin heating when the vehicle is operating in electric mode.

The Engine Coolant Pump (eWP) is a smart pump with four pins. Two of the pins are connected directly to battery power and electrical ground. The other circuits are connected to the PCM. One is connected to the LIN bus (primary PCM control) and the other is called the Emergency Run Input (ERI) line that can be used to control the pump with a PWM signal if the LIN bus goes down. This ERI line has been wired directly to ignition power so that the pump will be commanded to run any time the LIN bus is failed and ignition is on.

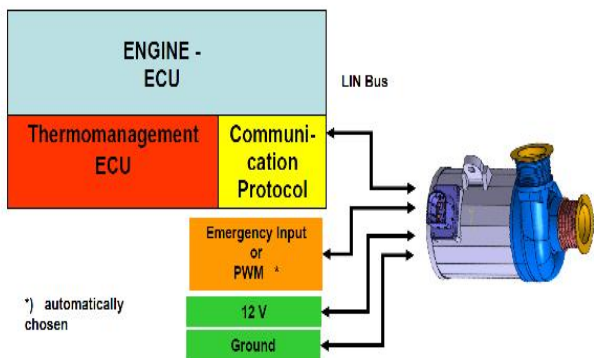


Figure 1: Electric water pump/motor assembly block diagram

Below is a summary of the diagnostics associated with the Engine Coolant Pump. Circuit faults for the LIN bus and ERI lines are detected by the PCM while the pump power and ground line faults are detected by the Engine Coolant Pump Control Module and communicated to the PCM through the LIN bus line. All mechanical faults are detected by the Engine Coolant Pump Control Module and also communicated to the PCM over the LIN bus.

The Engine Coolant Pump speed is controlled by the PCM and communicated to the Engine Coolant Pump Control Module over the LIN bus. A LIN bus communication fault (U019F) is set when the engine coolant pump speed echoed back from the Engine Coolant Pump Control Module doesn't match the desired speed sent from the PCM (requires no other electric water pump faults exist).

Engine Coolant Pump communication check operation	
DTCs	U019F - Lost Communication With Engine Coolant Pump Control Module
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	Over-temperature (P26D2), over-current (P26CB), blocked impeller (P26CB), or dry run (P26CE).
Monitoring Duration	10 seconds to register a malfunction

Typical Engine Coolant Pump communication check malfunction thresholds:
Difference between desired pump speed and actual pump speed > 300 RPM

Failures on the Emergency Run Input (ERI) line are detected by checking the status of the ERI line communicated to the PCM over LIN. Since the ERI line is hardwired to the vehicle ignition key, the returned ERI line state should always match the vehicle ignition state. When there is a mismatch, a DTC P26CA is set. This monitor requires that the LIN communications bus has not failed.

Engine Coolant Pump Emergency Run Input check operation	
DTCs	P26CA – Engine Coolant Pump Control Circuit/Open
Monitor execution	Continuous
Monitor Sequence	None
Monitoring Conditions	No LIN bus communication faults (U019F).
Monitoring Duration	5 seconds to register a malfunction

Typical Engine Coolant Pump Emergency Run Input check malfunction thresholds:
Difference between ERI state reported by ECPCM and actual ERI state at PCM

The Engine Coolant Pump power and ground line status is not communicated to the PCM by Engine Coolant Pump Control Module. Therefore, the status of these lines is inferred by the PCM. If either of these lines is faulted, the Engine Coolant Pump will not run, and there will be no LIN bus communications from the Engine Coolant Pump Control Module to the PCM. The PCM first checks to see if a fault on the communication line (U019F). If the communication line is faulted and the engine coolant temperature is increasing then it is assumed that the pump is not running and a P26D3 DTC is set. If the engine coolant temperature is not increasing then the PCM identifies the communications fault only.

Engine Coolant Pump Control Module Power/Ground check operation	
DTCs	P26D3 – Engine Coolant Pump Supply Voltage Circuit
Monitor execution	Continuous
Monitor Sequence	None
Monitoring Conditions	None
Monitoring Duration	5 seconds to register a malfunction

Electric Water Pump Control Module Power/Ground Signal Fault malfunction thresholds:
LIN bus comm. fault (U019F) and accumulated engine coolant temp increase > 10°C

The Engine Coolant Pump Control Module can use the rpm feedback and current feedback to detect mechanical faults for a blocked impeller and a "dry run" condition, i.e. loss of coolant. These conditions are communicated back to the PCM over the LIN bus.

Engine Coolant Pump Mechanical Faults check operation	
DTCs	P26CB – Engine Coolant Pump Performance/Stuck Off P26CE – Engine Coolant Pump Overspeed
Monitor execution	Continuous Operation
Monitor Sequence	None
Monitoring Conditions	No LIN bus communication faults (U019F).
Monitoring Duration	5 seconds to register a malfunction

Engine Coolant Pump Mechanical Faults check operation malfunction thresholds:
P26CB: pump current too high, rpm too low for 4 restart events
P26CE: pump speed > 4909 rpm and current too low

The Engine Coolant Pump Control Module communicates the control module electronics voltage and temperature over the LIN bus to the PCM. The voltage is compared to the PCM system voltage to set DTCs P26D0 and P26D1. The temperature signal is checked for out-of-range high which sets a P26D2 DTC.

Engine Coolant Pump Control Module Electrical Faults check operation	
DTCs	P26D0 – Engine Coolant Pump Control Module System Voltage Low P26D1 – Engine Coolant Pump Control Module System Voltage High P26D2 - Engine Coolant Pump Control Module Over Temperature
Monitor execution	Continuous Operation
Monitor Sequence	None
Monitoring Conditions	No LIN bus communication faults (U019F).
Monitoring Duration	5 seconds to register a malfunction

E Engine Coolant Pump Control Module Electrical Faults malfunction thresholds:
P26D0 – ECPCM voltage < (PCM battery voltage plus 4 volts)
P26D1 – ECPCM voltage > (PCM battery voltage plus 4 volts)
P26D2 – ECPCM temperature > 130°C

Cold Start Emission Reduction Component Monitor

Engine Speed and Spark Timing Component Monitor (2010 MY and beyond)

Entry Conditions and Monitor Flow

The System Monitor and 2010 Component Monitor share the same entry conditions and monitor flow. During the first 15 seconds of a cold start, the monitor checks the entry conditions, counts time in idle, observes catalyst temperature, calculates the average difference between desired and actual engine speed, and calculates the average difference between desired and commanded spark.

If the expected change in catalyst temperature is large enough, the monitor then begins the waiting period, which lasts until 300 seconds after engine start. This 5-minute wait allows time to diagnose other components and systems that affect the validity of the test. During this waiting period, there are no constraints on drive cycle and the monitor cannot be disabled without turning off the key.

If the System monitor result falls below its threshold and all of the Component monitor results are below their respective thresholds, the monitor determines whether the idle time was sufficient. If so, it considers the tests a pass and the monitor is complete. If idle time was not sufficient, the monitor does not make a pass call and does not complete. This prevents tip-ins from resulting in false passes.

Cold Start Engine Speed Monitor

Once the waiting period is complete, the monitor compares the average difference between desired and actual engine speeds to a calibratable threshold that is a function of ECT at start. If the magnitude of the discrepancy exceeds the threshold, P050A is set.

Cold Start Spark Timing Monitor

Once the waiting period is complete, the monitor compares the average difference between desired and commanded spark to a calibratable threshold that is a function of ECT at start. If the magnitude of the discrepancy exceeds the threshold, P050B is set.

CSER COMPONENT MONITOR OPERATION	
Component Monitor DTCs	P050A: Cold Start Idle Air Control System Performance P050B: Cold Start Ignition Timing Performance
Monitor Execution	Once per driving cycle, during a cold start
Monitor Sequence	Monitor data collection takes place during first 15 seconds of cold start
Sensors OK	No fault is present in any of the sensors or systems affecting the catalyst temperature model: Mass Air Flow (P0102, P0103), Throttle Position (P0122, P0123, P0222, P0223), Misfire (P0316, P0300-P0312), Injectors (P0201-P0212), Fuel System (P0171, P0172, P0174, P0175), Secondary Air (P0412, P2258), Crank Position Sensor (P0320), Ignition Coil (P0351-P0360), Intake Air Temp (P0112, P0113), Engine Coolant Temp/Cylinder Head Temp (P0117, P0118, P1289, P1290), Variable Cam Timing (P0010, P0020, P0011, P0012, P0021, P0022), Intake Manifold Runner Control (P2008).
Monitoring Duration	Monitor completes 300 seconds after initial engine start

TYPICAL CSER COMPONENT MONITOR ENTRY AND COMPLETION CONDITIONS

Entry condition	Minimum	Maximum
Barometric Pressure	22 in. Hg	
Engine Coolant Temperature at Start	35 °F	100 °F
Catalyst Temperature at Start	35 °F	125 °F
Fuel Level	15%	
BARO	22.5" Hg	
No Torque Reduction by Injector Cutout		
Power Takeout Not Active		
Completion condition	Minimum	Maximum
Length of Time Entry Conditions are Satisfied	11 sec.	
Expected Change in Catalyst Temperature	50 °F	
Time in Idle	10 sec.	
Selected Gear	Neutral	Drive

TYPICAL CSER COMPONENT MONITOR MALFUNCTION THRESHOLDS

Engine speed discrepancy > 200 rpm
Spark timing discrepancy > 10 deg.

Cold Start Variable Cam Timing Monitor (2008 MY and beyond)

If the VCT cam phasing is used during a cold start to improved catalyst heating, the VCT system is checked functionally by monitoring the closed loop cam position error correction. If the proper cam position cannot be maintained and the system has an advance or retard error greater than the malfunction threshold, a cold start emission reduction (CSER) VCT control malfunction is indicated (P052A/P052B (Bank 1), P052C/P052D (Bank2)). This test is the same test that was used previously for monitoring the VCT system under Comprehensive Component Monitoring requirements.

CSER VCT Target Error Check Operation:]	
DTCs	P052A – Cold start camshaft position timing over-advanced (Bank 1) P052B – Cold start camshaft timing over-retarded (Bank 1)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	2 seconds

Typical CSER VCT target error entry conditions:		
Entry condition	Minimum	Maximum
VCT control enabled and commanded to advance or retard cam during CSER	n/a	n/a
Time since start of CSER cam phase monitoring		60 seconds

Typical CSER VCT target error malfunction thresholds:
CSER Response/target error - VCT over-advance: 11 degrees
CSER Response/target error - VCT over-retard: 11 degrees
CSER Response/Stuck Pin – 10 degrees phasing commanded, and not seeing at least 2 degrees of movement.

Cold Start Emission Reduction System Monitor

The Cold Start Emission Reduction System Monitor is being introduced for the 2007 MY on vehicles that meet the LEV-II emission standards. The System Monitor detects the lack of catalyst warm up resulting from a failure to apply sufficient CSER during a cold start. It does this by using the inferred catalyst temperature model to determine how closely the actual catalyst temperature follows the expected catalyst temperature during a cold start. How closely the actual temperature follows the expected temperature is reflected in a ratio which is compared with a calibratable threshold.

Temperatures Used

The actual catalyst temperature is the same inferred catalyst temperature that is used by other portions of the engine control system, including the CSER control system. The inputs to this actual temperature are measured engine speed, measured air mass, and commanded spark.

The expected catalyst temperature is calculated using the same algorithm as the actual catalyst temperature, but the inputs are different. Desired engine speed replaces measured engine speed, desired air mass replaces measured air mass, and desired cold start spark replaces commanded spark. The resulting temperature represents the catalyst temperature that is expected if CSER is functioning properly.

Ratio Calculation

A ratio is calculated to reflect how closely the actual temperature has followed the expected temperature. This ratio is the difference between the two temperatures at a certain time-since-start divided by the increase in expected temperature over the same time period. The ratio, then, provides a measure of how much loss of catalyst heating occurred over that time period.

This ratio correlates to tailpipe emissions. Therefore applying a threshold to it allows illumination of the MIL at the appropriate emissions level. The threshold is a function of ECT at engine start.

General CSER Monitor Operation

During the first 15 seconds of a cold start, the monitor checks the entry conditions, counts time in idle, and observes catalyst temperature.


If the expected change in catalyst temperature is large enough, the monitor calculates the ratio as described above. Otherwise the monitor does not make a call.

The monitor then begins the waiting period, which lasts from the time the ratio is calculated (15 seconds after engine start) until 300 seconds after engine start. This 5-minute wait allows time to diagnose other components and systems that affect the validity of the catalyst temperature model. During this waiting period, there are no constraints on drive cycle and the monitor cannot be disabled without turning off the key.

At the end of the waiting period, if no other faults that could compromise the validity of the catalyst temperature model are found, the monitor compares the ratio to the threshold.

If the ratio exceeds the threshold, the monitor considers the test a fail, and the monitor is complete.

If the ratio falls below the threshold, and all of the component monitor results are below their respective thresholds, the monitor determines whether the idle time was sufficient. If so, it considers the test a pass and the monitor is complete. If idle time was not sufficient, the monitor does not make a pass call and does not complete. This prevents tip-ins from resulting in false passes.

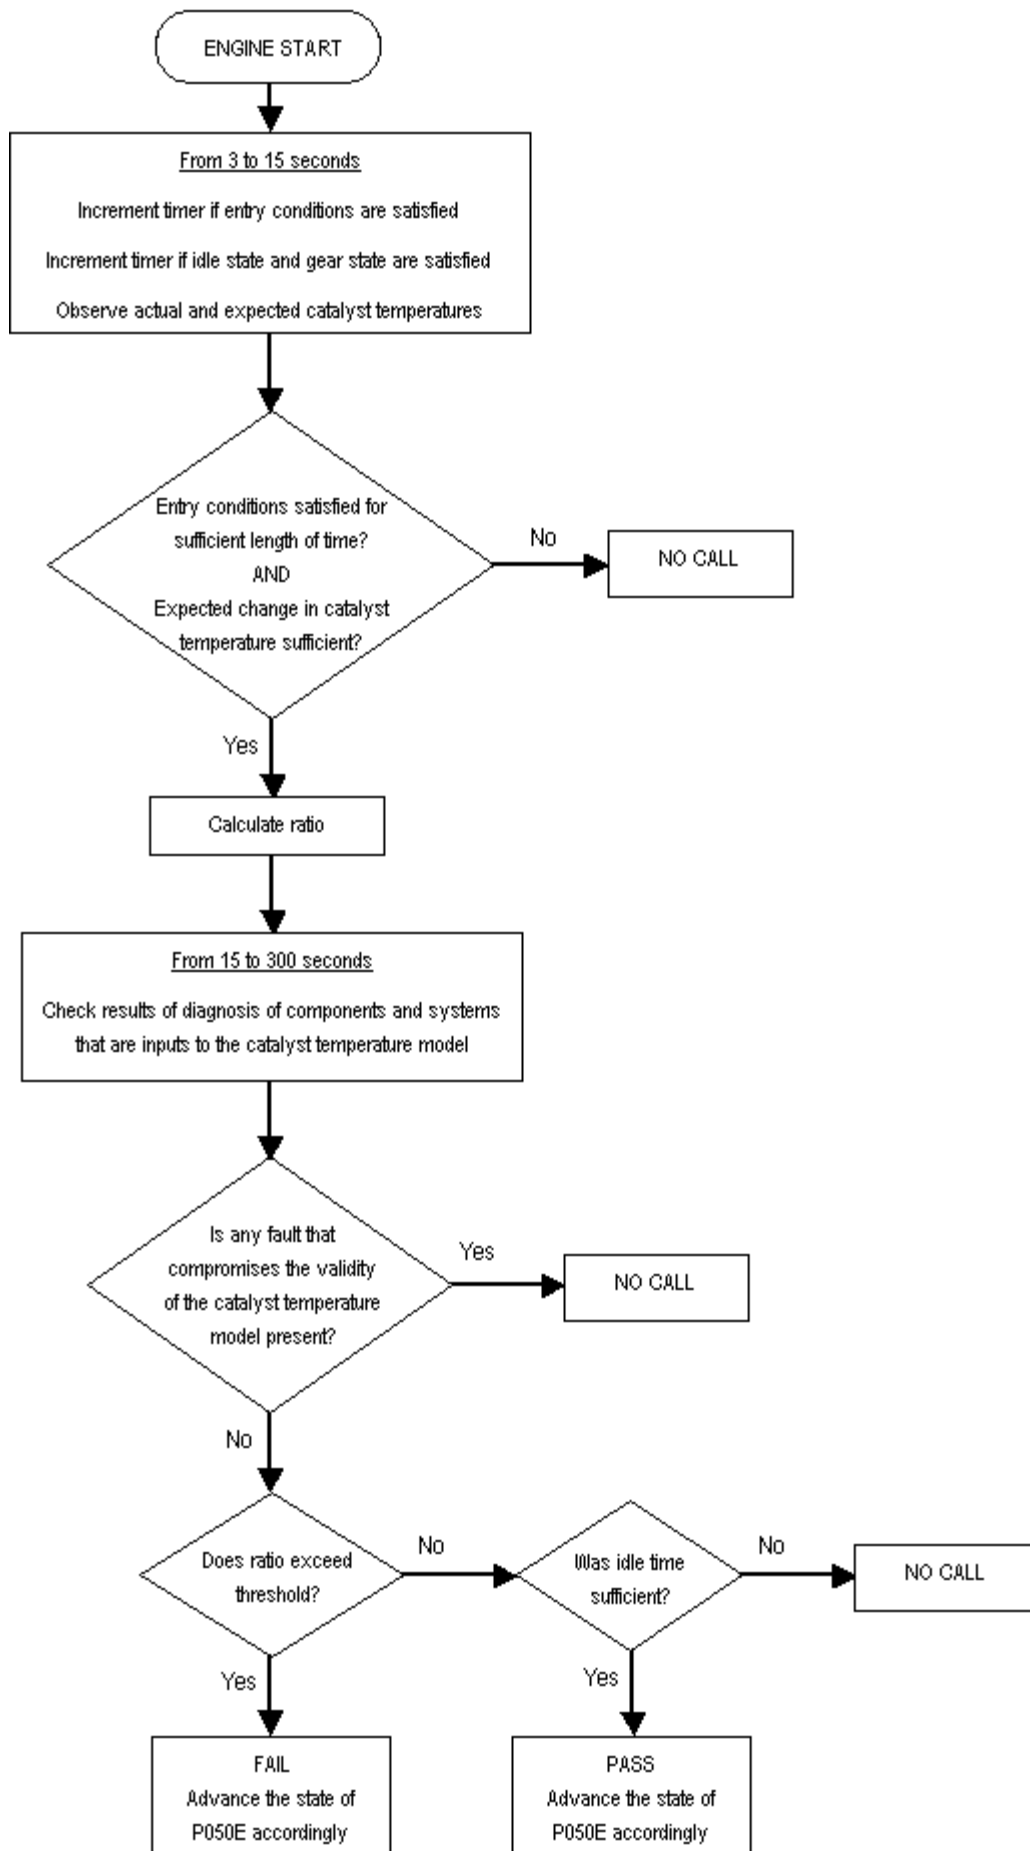

CSER SYSTEM MONITOR OPERATION	
DTC	P050E: Cold Start Engine Exhaust Temperature Too Low
Monitor Execution	Once per driving cycle, during a cold start
Monitor Sequence	Monitor data collection takes place during first 15 seconds of cold start
Sensors OK	No fault is present in any of the sensors or systems affecting the catalyst temperature model: Mass Air Flow (P0102, P0103), Throttle Position (P0122, P0123, P0222, P0223), Misfire (P0316, P0300-P0312), Injectors (P0201-P0212), Fuel System (P0171, P0172, P0174, P0175), Secondary Air (P0412, P2258), Crank Position Sensor (P0320), Ignition Coil (P0351-P0360), Intake Air Temp (P0112, P0113), Engine Coolant Temp/Cylinder Head Temp (P0117, P0118, P1289, P1290), Variable Cam Timing (P0010, P0020, P0011, P0012, P0021, P0022), Intake Manifold Runner Control (P2008).
Monitoring Duration	Monitor completes 300 seconds after initial engine start

TYPICAL CSER SYSTEM MONITOR ENTRY AND COMPLETION CONDITIONS		
Entry condition	Minimum	Maximum
Barometric Pressure	22 in. Hg	
Engine Coolant Temperature at Start	35 °F	100 °F
Catalyst Temperature at Start	35 °F	125 °F
Fuel Level	15%	
No Torque Reduction by Injector Cutout		
Power Takeout Not Active		
Completion condition	Minimum	Maximum
Length of Time Entry Conditions are Satisfied	11 sec.	
Expected Change in Catalyst Temperature	50 °F	
Time in Idle	10 sec.	
Selected Gear	Neutral	Drive

TYPICAL CSER SYSTEM MALFUNCTION THRESHOLD
Cold start warm-up temperature ratio > 0.2

Variable Cam Timing System Monitor

Variable Cam Timing (VCT) enables rotation of the camshaft(s) relative to the crankshaft (phase-shifting) as a function of engine operating conditions. There are four possible types of VCT with DOHC engines:

- Intake Only (phase-shifting only the intake cam);
- Exhaust Only (phase-shifting only the exhaust cam);
- Dual Equal (phase-shifting the intake and exhaust cams equally);
- Dual Independent (phase-shifting the intake and exhaust cams independently).

All four types of VCT are used primarily to increase internal residual dilution at part throttle to reduce NO_x, and to improve fuel economy. This allows for elimination the external EGR system.

With Exhaust Only VCT, the exhaust camshaft is retarded at part throttle to delay exhaust valve closing for increased residual dilution and to delay exhaust valve opening for increased expansion work.

With Intake Only VCT, the intake camshaft is advanced at part throttle and WOT (at low to mid-range engine speeds) to open the intake valve earlier for increased residual dilution and close the intake valve earlier in the compression stroke for increased power. When the engine is cold, opening the intake valve earlier warms the charge which improves fuel vaporization for less HC emissions; when the engine is warm, the residual burned gasses limit peak combustion temperature to reduce NO_x formation.

With Dual Equal VCT, both intake and exhaust camshafts are retarded from the default, fully advanced position to increase EGR residual and improve fuel economy by reducing intake vacuum pumping losses. The residual charge for NO_x control is obtained by backflow through the late-closing exhaust valve as the piston begins its intake stroke.

The VCT system hardware consists of a control solenoid and a pulse ring on the camshaft. The PCM calculates relative cam position using the CMP input to process variable reluctance sensor pulses coming from the pulse ring mounted on the camshaft. Each pulse wheel has $N + 1$ teeth where N = the number of cylinders per bank. The N equally spaced teeth are used for cam phasing; the remaining tooth is used to determine cylinder # 1 position. Relative cam position is calculated by measuring the time between the rising edge of profile ignition pickup (PIP) and the falling edges of the VCT pulses.

The PCM continually calculates a cam position error value based on the difference between the desired and actual position and uses this information to calculate a commanded duty cycle for the VCT solenoid valve. When energized, engine oil is allowed to flow to the VCT unit thereby advancing and retarding cam timing. The variable cam timing unit assembly is coupled to the camshaft through a helical spline in the VCT unit chamber. When the flow of oil is shifted from one side of the chamber to the other, the differential change in oil pressure forces the piston to move linearly along the axis of the camshaft. This linear motion is translated into rotational camshaft motion through the helical spline coupling. A spring installed in the chamber is designed to hold the camshaft in the low-overlap position when oil pressure is too low (~15 psi) to maintain adequate position control. The camshaft is allowed to rotate up to 30 degrees.

Although the VCT system has been monitored under Comprehensive Component Monitoring requirements for many years, a new, emission-based VCT monitor is being introduced for the 2006 MY on vehicles that meet LEV-II emission standards. The intent of the new VCT monitoring requirements is to detect slow VCT system response that could cause emissions to increase greater than $1.5 * \text{std.}$ in addition to detecting functional problems (target errors).

The new logic calculates the instantaneous variance in actual cam position (the squared difference between actual cam position and commanded cam position), then calculates the long term variance using a rolling average filter (Exponentially Weighted Moving Average). Continued, slow response from the VCT system will eventually accumulate large variances.

This same logic will also detect target errors that were detected by the previous CCM monitor. If the VCT system is stuck in one place, the monitor will detect a variance which will quickly accumulate.

There are three variance indices that monitor cam variance in the retard direction, the advance direction, and for V-engines, the difference between banks. If any variance index is greater than the malfunction threshold, a VCT slow response/target error malfunction will be indicated (P0011, P0012 Bank 1, 0021, P0022 Bank 2). Target errors will tend to generate only a single over-advanced or over-retarded code while slow response will tend to generate both codes.

In addition, logic has been added to determine whether the camshaft and crankshaft are misaligned by one or more teeth. This test calculates the absolute offset between one of the camshaft teeth and the crankshaft missing tooth at idle when that can is at its stop. If the error is greater than the malfunction threshold, a cam/crank misalignment error will be indicated (P0016 Bank 1, P0018 Bank 2).

For systems that phase the cams immediately off of a cold start for reducing emissions or CSER (Cold Start Emissions Reduction) the cam position is monitored for functionality during this period of time. There are two ways to set failures.

- Error between the actual position and the expected position is calculated. If the error is greater than a specified amount, and the Error persists for a period of time, a P052x code is set designating over advanced or retarded and the bank number. The diagnostic is only executed during CSER phasing.
- The diagnostic also checks for a cam position request above a threshold for a period of time, and determines that the VCT actuator pin is stuck if the cam does not move from the locked position by a certain amount. This is also only done during CSER operation. If the locking pin is determined to be stuck then the Oil Control Solenoid (OCS) is cycled on and off for a calibratable amount to allow pressure to build in the system to unseat the locking pin. If attempts to unstick the locking pin fail, then a P052x code is set.

The in-use performance ratio numerator for the VCT monitor can be incremented only if the VCT system has been monitored for both functional and response faults. If the vehicle is operated in a manner that does not ask the VCT actuators to change position, it may not be possible to evaluate whether they are working properly. As a result, the in-use ratio numerator checks to see if the commanded VCT position changes sufficiently to detect possible target errors and with a sufficiently high rate to detect possible slow response. For each drive cycle in which both criteria are met, the VCT in-use performance numerator will be incremented.

Similar to the previous CCM monitor, the VCT solenoid output driver in the PCM is checked electrically for opens and shorts (P0010 Bank 1, P0020 Bank 2).

VCT Monitor Operation:	
DTCs	P0010 - Camshaft Position Actuator Circuit (Bank 1) P0011 - Cam Position Actuator Over Advanced (Bank 1) P0012 - Cam Position Actuator Over Retarded (Bank 1) P0016 - Crank/Cam Position Correlation (Bank 1)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	IAT, ECT, EOT, IMRC, TP, MAF, CKP, and CMP
Monitoring Duration	5 - 10 seconds for circuit faults and functional checks, 300 seconds for target error

Typical VCT response/functional monitor entry conditions:		
Entry condition	Minimum	Maximum
Engine RPM (for P0016/P0018 only)	850	4500
Engine Coolant Temperature	50 °F	
Engine Oil Temperature		280 °F
VCT control enabled and commanded to advance or retard cam **	n/a	n/a
<p>** VCT control of advance and retard by the engine is disabled in crank mode, when engine oil is cold (< 150 °F), while learning the cam/crank offset, while the control system is "cleaning" the solenoid oil passages, throttle actuator control in failure mode, and if one of the following sensor failures occur: IAT, ECT, EOT, MAF, TP, CKP, CMP, or IMRC.</p>		

Typical VCT monitor malfunction thresholds:

VCT solenoid circuit: Open/short fault set by the PCM driver

Cam/crank misalignment: > or = 7.5 crank degrees

Response/target error - VCT over-advance variance too high: 100 degrees squared

Response/target error - VCT over-retard variance too high: 400 degrees squared

Typical In-Use Performance monitoring thresholds:

Monitoring thresholds to increment the numerator:

Amount of cam change required for target error fault: > 160 degrees squared

Amount of rate of change required for slow response fault: > 5 degrees squared

J1979 VCT Monitor Mode \$06 Data

Monitor ID	Test ID	Description for CAN	Units
\$35	\$80	Camshaft Advanced Position Error Bank 1	Unsigned, Angular degrees
\$35	\$81	Camshaft Retarded Position Error Bank 1	Unsigned, Angular degrees

Electronic Throttle Control


The Electronic Throttle Control (ETC) system uses a strategy that delivers engine or output shaft torque, based on driver demand, utilizing an electronically controlled throttle body. ETC strategy was developed mainly to improve fuel economy. This is possible by decoupling throttle angle (produces engine torque) from pedal position (driver demand). This allows the powertrain control strategy to optimize fuel control and transmission shift schedules while delivering the requested engine or wheel torque.

The Gen2 ETC system was first introduced in 2003MY Ford products. This system evolved into the Gen3 ETC system in 2008MY and the Gen4 ETC system in 2009MY. The Gen3 and Gen4 ETC systems made improvements over the Gen2 system by reducing complexity, improving reliability, and optimizing cost. The primary changes made for the Gen3 / Gen4 ETC systems were the following:


- Replace 3-track sensor Accelerator Pedal with 2-track sensor Accelerator Pedal.
- Introduce single plunger dual output brake switch.
- Integrate the Throttle Plate Position Controller (eTPPC) into the main processor within PCM.
- Reduce Quizzer complexity and integrate with the EONV function.

The Gen3 / Gen4 ETC systems have equivalent hardware systems with only software differences.

Gen 2 ETC System

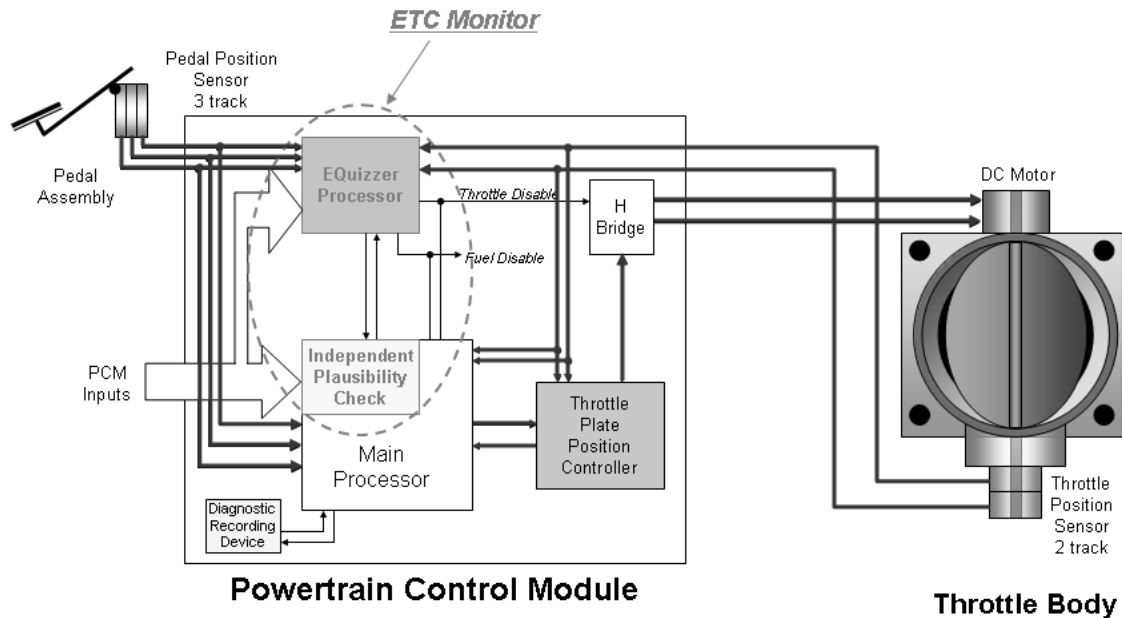

Gen 3 / Gen 4 ETC System

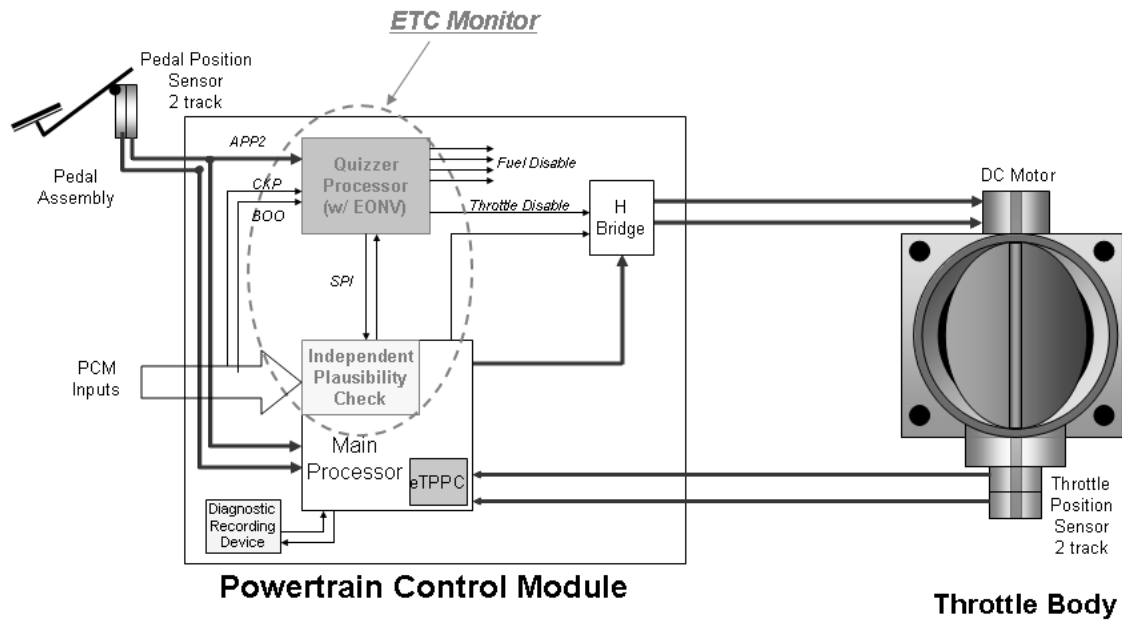

Because safety is a major concern with ETC systems, a complex safety monitor strategy (hardware and software) was developed. The monitor system is distributed across two processors: the main powertrain control processor and a monitoring processor called a Quizzer processor.

The primary monitoring function is performed by the Independent Plausibility Check (IPC) software, which resides on the main processor. It is responsible for determining the driver-demanded torque and comparing it to an estimate of the actual torque delivered. If the generated torque exceeds driver demand by specified amount, the IPC takes appropriate mitigating action.

Since the IPC and main controls share the same processor, they are subject to a number of potential, common-failure modes. Therefore, the Quizzer processor was added to redundantly monitor selected PCM inputs and to act as an intelligent watchdog and monitor the performance of the IPC and the main processor. If it determines that the IPC function is impaired in any way, it takes appropriate Failure Mode and Effects Management (FMEM) actions.

ETC System Failure Mode and Effects Management:

Effect	Failure Mode
No Effect on Drivability	A loss of redundancy or loss of a non-critical input could result in a concern that does not affect driveability. The powertrain malfunction indicator (wrench) and the malfunction indicator lamp (MIL) do not illuminate, however the speed control may be disabled. A DTC is set to indicate the component or circuit with the concern.
Delayed APP Sensor Response with Brake Override	This mode is caused by the loss of one APP sensor input due to sensor, wiring, or PCM concerns. The system is unable to verify the APP sensor input and driver demand. The throttle plate response to the APP sensor input is delayed as the accelerator pedal is applied. The engine returns to idle RPM whenever the brake pedal is applied. The powertrain malfunction indicator (wrench) illuminates, but the MIL does not illuminate in this mode. An APP sensor related DTC is set.
LOS Supercreep	Loss of both APP sensor inputs due to sensor, wiring, or PCM concerns, or internal control mode torque performance, or generator speed or crankshaft position (CKP) sensor or harness. There is no response when the accelerator pedal is applied. The engine returns to idle RPM and driver demanded torque returns to zero whenever the brake pedal is applied. The powertrain malfunction indicator (wrench) illuminates, but the MIL does not illuminate in this mode. An internal control module torque performance or internal control module drive motor/generator/engine speed sensor or APP sensor DTC is set
LOS Supercreep	Creep mode is caused by the loss of one brake pedal position (BPP) and one APP sensor input. The system is unable to determine driver demand. There is no response when the accelerator pedal is applied. The powertrain malfunction indicator (wrench) illuminates, but the MIL does not illuminate in this mode. An APP and BPP sensor, or harness related DTC is set.
RPM Guard with Pedal Follower	In this mode, the throttle plate control is disabled due to the loss of both TP sensor inputs, loss of throttle plate control, stuck throttle plate, significant processor concerns, or other major electronic throttle body concern. The spring returns the throttle plate to the default (limp home) position. A maximum allowed RPM is determined based on the position of the accelerator pedal (RPM Guard). If the actual RPM exceeds this limit, spark and fuel are used to bring the RPM below the limit. The powertrain malfunction indicator (wrench) and the MIL illuminate in this mode and a DTC for an ETC related component is set. EGR and VCT outputs are set to default values and speed control is disabled.
Shutdown	If a significant processor concern is detected, the monitor forces the vehicle to shutdown by disabling engine, generator and traction motor. The powertrain malfunction indicator (wrench), MIL, and hazard indicator may illuminate.

Transmission Range Sensor Inputs

Transmission Range Sensor Check Operation:	
DTCs	P2800 – Transmission Range Sensor B Circuit (PRNDL input) (wrench light, non-MIL) P2801 – Transmission Range Sensor B Circuit Range/Performance (wrench light, non-MIL) P2802 – Transmission Range Sensor B Circuit Low (wrench light, non-MIL) P2803 – Transmission Range Sensor B Circuit High (wrench light, non-MIL) P2806 – Transmission Range Sensor Alignment (wrench light, non-MIL)
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

Transmission range sensor check malfunction thresholds:					
TR Sensor	Park	Reverse	Neutral	Drive	Low
TR_A1 (VOLTS)	3.84 - 4.77	2.58 - 3.31	1.82 - 2.56	0.97 - 1.79	0.20 - 0.92
TR_A2 (VOLTS)	0.20 - 1.08	1.56 - 2.25	2.26 - 2.96	2.97 - 3.74	3.77 - 4.45

Range/performance – disagreement between sensors > 3.85 degrees

Accelerator and Throttle Position Sensor Inputs

On-demand KOEO / KOER Sensor Check Operation:	
DTCs	P1575 – APP out of self-test range (non-MIL) [Gen3 / Gen4 only]
Monitor execution	On-demand
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

Accelerator Pedal Position Sensor Check Operation:	
DTCs	P2122, P2123 – APP D circuit continuity (wrench light, non-MIL) P2127, P2128 – APP E circuit continuity (wrench light, non-MIL) P2138 – APP D/E circuit disagreement (wrench light, non-MIL) [Gen3 / Gen4 only]
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

APP sensor check malfunction thresholds:	
Circuit continuity - Voltage < 0.25 volts or voltage > 4.75 volts	
Range/performance – disagreement between sensors > 1.1 degrees	

Throttle Position Sensor Check Operation:

DTCs	P0122, P0123 – TP A circuit continuity (MIL, wrench light) P0222, P0223 – TP B circuit continuity (MIL, wrench light) P2135 – TP A / TP B correlation (non-MIL, wrench light)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

TP sensor check malfunction thresholds:

Circuit continuity - Voltage < 0.25 volts or voltage > 4.75 volts

Correlation and range/performance – disagreement between sensors > 7 degrees

Electronic Throttle Monitor

Electronic Throttle Monitor Operation:	
DTCs	<p>U0300 – ETC software version mismatch, IPC or Quizzer (MIL, Hazard, wrench light for Gen3 / Gen4)</p> <p>P0600 – Serial Communication Link (MIL, Hazard, wrench light for Gen3 / Gen4)</p> <p>P060A – Internal control module monitoring processor performance (MIL, Hazard, wrench light for Gen3 / Gen4)</p> <p>P060B – Internal control module A/D processing performance (MIL, Hazard, wrench light)</p> <p>P060C – Internal control module main processor performance (MIL, Hazard, wrench light)</p> <p>P060D – Internal control module accelerator pedal performance (non-MIL) [Gen3 / Gen4 only]</p> <p>P061A – Internal control module Torque Performance (MIL, wrench light)</p> <p>P0A18 – Motor Torque Sensor Circuit Range/Performance (MIL, Hazard, wrench light)</p> <p>P0A23 – Generator Torque Sensor Circuit Range/Performance (MIL, Hazard, wrench light)</p> <p>P0C2F – Internal Control Module Drive Motor/Generator/Engine Speed Performance (MIL, wrench light)</p> <p>P1A0D – Hybrid Powertrain Control Module – Generator Disabled (MIL, Hazard, wrench light)</p> <p>P1A0E - Hybrid Powertrain Control Module – Motor Disabled (MIL, Hazard, wrench light)</p> <p>P061F – Internal control module throttle actuator controller performance (non-MIL, wrench light for Gen3 / Gen4)</p> <p>P1674 – Internal control module software corrupted (MIL, hazard, wrench light for Gen3 / Gen4)</p>
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

Throttle Plate Position Controller (TPPC) Outputs

The purpose of the TPPC is to control the throttle position to the desired throttle angle. The Gen2 ETC system has a separate chip embedded in the PCM. The Gen3 / Gen4 ETC systems have the eTPPC function integrated in the main PCM processor.

For the stand alone TPPC, the desired throttle angle is communicated from the main CPU via a 312.5 Hz duty cycle signal. The TPPC interprets the duty cycle signal as follows:

0% <= DC < 4% - Out of range, limp home default position.

4% <= DC < 6% - Commanded default position, closed.

6% <= DC < 7% - Commanded default position. Used for key-on, engine off.

7% <= DC < 8% - Ice Breaker Mode.

8% <= DC < 10% - Closed against hard-stop. Used to learn zero throttle angle position (hard-stop) after key-up

10% <= DC <=92% - Normal operation, between 0 degrees (hard-stop) and 82%, 10% duty cycle = 0 degrees throttle angle, 92% duty cycle = 82 degrees throttle angle.

92% < DC <= 96% - Wide Open Throttle, 82 to 86 degrees throttle angle.

96% < DC <= 100% - Out of Range, limp home default position

The desired angle is relative to the hard-stop angle. The hard-stop angle is learned during each key-up process before the main CPU requests the throttle plate to be closed against the hard-stop. The output of the (e)TPPC is a voltage request to the H-driver (also in PCM). The H driver is capable of positive or negative voltage to the Electronic Throttle Body Motor.

Throttle Plate Controller and Actuator Operation:	
DTCs	P2107 – processor test (MIL, wrench light) P2111 – throttle actuator system stuck open (MIL, wrench light) P2112 – throttle actuator system stuck closed (MIL, wrench light) P2101 – throttle actuator range/performance test (MIL, wrench light) P115E – throttle actuator airflow trim at max limit (MIL)
Monitor execution	Continuous
Monitor Sequence	None
Monitoring Duration	< 5 seconds to register a malfunction

Comprehensive Component Monitor - Engine

Engine Temperature Sensor Inputs

Analog inputs such as Intake Air Temperature (P0112, P0113), Cylinder Head Temperature (P1289, P1290), Mass Air Flow (P0102, P0103) and Throttle Position (P0122, P0123) are checked for opens, shorts, or rationality by monitoring the analog -to-digital (A/D) input voltage.

The ECT rationality test checks to make sure that ECT is not stuck high in a range that causes other OBD to be disabled. If after a long (6 hour) soak, ECT is very high (> 230 °F) and is also much higher than IAT at start, it is assumed that ECT is stuck high. If after a long (6 hour) soak, ECT is stuck midrange between 175 °F (typical thermostat monitor threshold temperature) and 230 °F and is also much higher than IAT at start, it is assumed that ECT is stuck mid range.

ECT Sensor Rationality Check Operation:

DTCs	P0116 (ECT stuck high or midrange)
Monitor execution	Once per driving cycle
Monitor Sequence	None
Sensors OK	ECT, CHT, IAT
Monitoring Duration	100 seconds to register a malfunction

Typical ECT Sensor Rationality check entry conditions:

Entry Condition	Minimum	Maximum
Engine-off time (soak time)	360 min	
Difference between ECT and IAT		50 deg
Engine Coolant Temperature	230 °F	
Engine Coolant Temperature for stuck midrange condition	160 °F	230 °F

Typical ECT Sensor Rationality check malfunction thresholds:

Catalyst, Misfire, Fuel System or HO2S Monitors have not run this drive cycle

The CHT sensor measures cylinder head metal temperature as opposed to engine coolant temperature. At lower temperatures, CHT temperature is equivalent to ECT temperature. At higher temperatures, ECT reaches a maximum temperature (dictated by coolant composition and pressure) whereas CHT continues to indicate cylinder head metal temperature. If there is a loss of coolant or air in the cooling system, the CHT sensor will still provides an accurate measure of cylinder head metal temperature. If a vehicle uses a CHT sensor, the PCM software calculates both CHT and ECT values for use by the PCM control and OBD systems.

Cylinder Head Temperature Sensor Check Operation:	
DTCs	P1289 (high input), P1290 (low input), P1299 (fail-safe cooling activated)
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	not applicable
Monitoring Duration	5 seconds to register a malfunction

Typical CHT sensor check malfunction thresholds:	
Voltage < 0.41 volts or voltage > 4.95 volts	
For P1299, MIL illuminates immediately if CHT > 270 ° Fuel shut-off is activated to reduce engine and coolant temperature	

Intake Air Temperature Sensor Check Operation:	
DTCs	P0112 (low input), P0113 (high input)
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	not applicable
Monitoring Duration	5 seconds to register a malfunction

Typical IAT sensor check malfunction thresholds:	
Voltage < 0.20 volts or voltage > 4.93 volts	

ECT, IAT, EOT Temperature Sensor Transfer Function		
Volts	A/D counts in PCM	Temperature, degrees F
4.89	1001	-40
4.86	994	-31
4.81	983	-22
4.74	970	-13
4.66	954	-4
4.56	934	5
4.45	910	14
4.30	880	23
4.14	846	32
3.95	807	41
3.73	764	50
3.50	717	59
3.26	666	68
3.00	614	77
2.74	561	86
2.48	508	95
2.23	456	104
1.99	407	113
1.77	361	122
1.56	319	131
1.37	280	140
1.20	246	149
1.05	215	158
0.92	188	167
0.80	165	176
0.70	144	185
0.61	126	194
0.54	110	203
0.47	96	212
0.41	85	221
0.36	74	230
0.32	65	239
0.28	57	248
0.25	51	257
0.22	45	266
0.19	40	275
0.17	35	284
0.15	31	293
0.14	28	302

IAT Rationality Test

The IAT rationality test determines if the IAT sensor is producing an erroneous temperature indication within the normal range of IAT sensor input.

The IAT sensor rationality test is run only once per power-up. The IAT sensor input is compared to the CHT sensor input (ECT sensor input on some applications) at key-on after a long (6 hour) soak. If the IAT sensor input and the CHT (ECT) sensor input agree within a tolerance (+/- 30 deg F), no malfunction is indicated and the test is complete. If the IAT sensor input and the CHT (ECT) sensor input differ by more than the tolerance, the vehicle must be driven over maximum electric vehicle speed for 5 minutes to confirm the fault. This is intended to address noise factors like sun load that can cause the IAT sensor to indicate a much higher temperature than the CHT (ECT) sensor after a long soak. Driving the vehicle attempts to bring the IAT sensor reading within the test tolerance. If the IAT sensor input remains outside of the tolerance after the vehicle drive conditions have been met, the test indicates a malfunction and the test is complete.

In addition to the start-up rationality check, an IAT "Out of Range" check is also performed. The test continuously checks to see if IAT is greater than the "IAT Out of Range High threshold", approximately 150 deg F. In order to prevent setting false DTC during extreme ambient or vehicle soak conditions, the same count up/count down timer used for the IAT startup rationality test is used to validate the fault. If IAT is greater than 150 deg F and vehicle speed is greater than ~ 40 mph for 250 seconds then set a P0111.

Either the IAT startup rationality test or the IAT Out of Range High test can set a P0111 DTC. The logic is designed so that either fault can trigger a P0111, however, both faults must be OK before the P0111 DTC is cleared.

Block heater detection results in a no-call.

Intake Air Temperature Sensor Range/Performance Check Operation:	
DTCs	P0111 (range/performance)
Monitor execution	Once per driving cycle, at start-up
Monitor Sequence	None
Sensors OK	ECT/CHT, IAT, VSS
Monitoring Duration	Immediate or up to 30 minutes to register a malfunction

Typical Intake Air Temperature Sensor Range/Performance Entry Conditions		
Entry condition	Minimum	Maximum
Air Mass	1.2 lbm/min	
Engine off (soak) time	6 hours	
Battery Voltage	11.0 Volts	
Time since engine start (if driving req'd)		30 min
Vehicle speed (if driving req'd)	35 mph	
Time above minimum vehicle speed (if driving req'd)	5 min	
IAT - ECT at start (block heater inferred)	-30 °F	-90 °F

Typical IAT sensor check malfunction thresholds:
IAT and ECT/CHT error at start-up > +/-30 deg F

Intake Air Temperature Sensor Out of Range High Check Operation:	
DTCs	P0111 (Out of Range High)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	ECT/CHT, IAT, VSS
Monitoring Duration	250 seconds to register a malfunction

Typical Intake Air Temperature Sensor Out of Range high Entry Conditions		
Entry condition	Minimum	Maximum
Engine off (soak) time	6 hours	
Battery Voltage	11.0 Volts	
Vehicle speed	35 mph	
Time above minimum vehicle speed (if driving req'd)	5 min	

Typical IAT Sensor Out of Range High check malfunction thresholds:
IAT > 150 deg F

Throttle Position Sensor

Throttle Position Sensor Check Operation:	
DTCs	P0122 (low input), P0123 (high input)
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	not applicable
Monitoring Duration	5 seconds to register a malfunction

Typical TP sensor check malfunction thresholds:
Voltage < 0.20 volts or voltage > 4.80 volts

Mass Air Flow Sensor

MAF Sensor Check Operation:	
DTCs	P0102 (low input), P0103 (high input)
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	not applicable
Monitoring Duration	5 seconds to register a malfunction

Typical MAF sensor check malfunction thresholds:
Voltage < 0.244 volts and engine running or voltage > 4.785 volts engine rpm < 4,000 rpm

MAF/TP Rationality Test

The MAF and TP sensors are cross-checked to determine whether the sensor readings are rational and appropriate for the current operating conditions. (P1A0C)

MAF/TP Rationality Check Operation:	
DTCs	P1A0C
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	5 seconds within test entry conditions

Typical MAF/TP rationality check entry conditions:		
Entry Condition	Minimum	Maximum
Engine RPM	1025 rpm	minimum of 3800 rpm
Engine Coolant Temp	40 °F	

Typical MAF/TP rationality check malfunction thresholds:
Load > 55% and TP < 0.288 volts or Load < 20% and TP > 1.953 volts

5 Volt Sensor Reference Voltage Check:	
DTCs	P0642 (low input), P0643 (high input)
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 seconds to register a malfunction

Typical sensor check malfunction thresholds:	
Voltage < 4.5 volts or voltage > 5.5 volts	

Miscellaneous CPU Tests

Loss of Keep Alive Memory (KAM) power (a separate wire feeding the PCM) results in a P1633 DTC and immediate MIL illumination on most applications.

Vehicles that require tire/axle information and VIN to be programmed into the PCM Vehicle ID block (VID) will store a P1639 if the VID block is not programmed or corrupted.

Additional DTCs will be stored to indicate various internal PCM hardware malfunctions:

P0602 - Powertrain Control Module Programming Error indicates that the Vehicle ID block check sum test failed.

P0603 - Powertrain Control Module Keep Alive Memory (KAM) Error indicates the Keep Alive Memory check sum test failed.

P0604 - Powertrain Control Module Random Access Memory (RAM) Error indicates the Random Access Memory read/write test failed.

P0605 - Powertrain Control Module Read Only Memory (ROM) Error indicates a Read Only Memory check sum test failed.

P0607 - Powertrain Control Module Performance indicates incorrect CPU instruction set operation, or excessive CPU resets.

P068A - ECM/PCM Power Relay De-energized - Too Early. This fault indicates that NVRAM write did not complete successfully after the ignition key was turned off, prior to PCM shutdown.

P06B8 - Internal Control Module Non-Volatile Random Access Memory (NVRAM) Error indicates Permanent DTC check sum test failed

The PCM "engine off" or "soak" timer is tested to ensure that it is functional. The value of engine coolant temperature decays after the engine is turned off. This decay is modeled as a function of ECT, IAT and soak time. If, during a cold start, (difference between ECT and IAT is low), the actual ECT at start is much lower than the predicted ECT at start, it means that the soak timer is not functioning and a P2610 DTC is stored. (If the timer fails, it will read zero seconds and the model will predict that ECT will be the same temperature as when the engine was last turned off.)

U0101 – Lost Communication With TCM

5 Volt Sensor Reference Voltage A Check:

DTCs	P0642 (low input) P0643 (high input)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	5 sec to register a malfunction

Typical 5 Volt Sensor Reference Voltage A & B check entry conditions:

Entry Condition	Minimum	Maximum
Ignition "ON"	NA	NA

Typical 5 Volt Sensor Reference Voltage A & B check malfunction thresholds:P0642

Short to ground (signal voltage): < 4.75 V

P0643

Short to battery plus (signal voltage): > 5.25 V

Ignition

New floating point processors no longer use an EDIS chip for ignition signal processing. The crank and cam position signals are now directly processed by the PCM/ECM microprocessor using a special interface chip called a Time Processing Unit or TPU. The 36-tooth crankshaft and camshaft position signals come directly into the TPU. The signals to fire the ignition coil drivers also come from the TPU.

The ignition system is checked by monitoring three ignition signals during normal vehicle operation:

CKP, the signal from the crankshaft 60-2-tooth wheel. The missing teeth are used to locate the cylinder pair associated with cylinder # 1. The TPU also generates the Profile Ignition Pickup (PIP) signal, a 50% duty cycle, square wave signal that has a rising edge at 10 deg BTDC.

Camshaft Position (CMP), a signal derived from the camshaft to identify the #1 cylinder

First, several relationships are checked on the 60-2 tooth CKP signal. The TPU looks for the proper number of teeth (58) after the missing teeth are recognized; time between teeth too low (< 30 rpm or > 9,000 rpm); or the missing teeth were not where it was expected to be. If an error occurs, the TPU shuts off fuel and the ignition coils and attempts to resynchronize itself. It takes one revolution to verify the missing tooth, and another revolution to verify cylinder #1 using the CMP input. Note that if a P0320 DTC is set on a vehicle with Electronic Throttle Control, (ETC), the ETC software will also set a P2106.

If the proper ratio of CMP events to PIP events is not being maintained (for example, 1 CMP edge for every 8 PIP edges for an 8-cylinder engine), it indicates a missing or noisy CMP signal (P0340). On applications with Variable Cam Timing (VCT), the CMP wheel has five teeth to provide the VCT system with more accurate camshaft control. The TPU checks the CMP signal for an intermittent signal. If an intermittent is detected, the VCT system is disabled and a P0344 (CMP Intermittent Bank 1) or P0349 (CMP intermittent Bank 2) is set.

CKP Ignition System Check Operation:

DTCs	P0320 - Ignition Engine Speed Input Circuit
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	
Monitoring Duration	< 5 seconds

Typical CKP ignition check entry conditions:

Entry Condition	Minimum	Maximum
Engine RPM for CKP	200 rpm	

Typical CKP ignition check malfunction thresholds:

Incorrect number of teeth after the missing tooth is recognized,
Time between teeth too low (< 30 rpm or > 9,000 rpm)
Missing tooth was not where it was expected to be.

CMP Ignition System Check Operation:

DTCs	P0340 - Intake Cam Position Circuit, Bank 1
Monitor execution	continuous
Monitor Sequence	none
Sensors OK	
Monitoring Duration	< 5 seconds

Typical CMP ignition check entry conditions:

Entry Condition	Minimum	Maximum
Engine RPM for CMP	200 rpm	

Typical CMP ignition check malfunction thresholds:

Ratio of PIP events to CMP events: 4:1, 6:1, 8:1 or 10:1 based on engine cyl

Coil Primary Ignition System Check Operation:

DTCs	P0351 – P0354 (Coil primary)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 5 seconds

Typical Coil primary ignition check entry conditions:

Entry Condition	Minimum	Maximum
Engine RPM for coil primary	200 rpm	Minimum of 3200 rpm
Positive engine torque	Positive torque	
Battery Voltage	11 volts	16 volts

Typical Coil primary ignition check malfunction thresholds:

Ratio of PIP events to IDM or NOMI events 1:1

Engine Outputs

The PCM will monitor the "smart" driver fault status bit that indicates either an open circuit, short to power or short to ground.

Injector Check Operation:	
DTCs	P0201 through P0204 (opens/shorts)
Monitor execution	Continuous within entry conditions
Monitor Sequence	None
Monitoring Duration	10 seconds

Typical injector circuit check entry conditions:		
Entry Condition	Minimum	Maximum
Battery Voltage	11.0 volts	
Engine Coolant Temp		240 °F
Intake Air Temp		150 °F

The Idle Air Control is functionally checked by monitoring the closed loop idle speed correction required to maintain the desired idle rpm. If the proper idle rpm cannot be maintained and the system has a high rpm (+100) or low rpm error (-200) greater than the malfunction threshold, an IAC malfunction is indicated. (P0507, P0506)

IAC Check Operation:	
DTCs	P0507 (functional - overspeed) P0506 (functional - underspeed)
Monitor execution	once per driving cycle
Monitor Sequence	None
Sensors OK	
Monitoring Duration	15 seconds

Typical IAC functional check entry conditions:		
Entry Condition	Minimum	Maximum
Engine Coolant Temp	130 °F	
Time since engine start-up	100 seconds	
Closed loop fuel	Yes	
Throttle Position (at idle, closed throttle, no dashpot)	Closed	Closed

Typical IAC functional check malfunction thresholds:
For underspeed error: Actual rpm 100 rpm below target, closed-loop IAC correction > 1 lb/min
For overspeed error: Actual rpm 200 rpm above target, closed-loop IAC correction < .2 lb/min

Mechanical Returnless Fuel System (MRFS) — Dual Speed

The FP signal is a duty cycle command sent from the PCM to the fuel pump control module. The fuel pump control module uses the FP command to operate the fuel pump at the speed requested by the PCM or to turn the fuel pump off. A valid duty cycle to command the fuel pump on, is in the range of 15-47%. The fuel pump control module doubles the received duty cycle and provides this voltage to the fuel pump as a percent of the battery voltage. When the ignition is turned on, the fuel pump runs for about 1 second and is requested off by the PCM if engine rotation is not detected.

FUEL PUMP DUTY CYCLE OUTPUT FROM PCM

FP Duty Cycle Command	PCM Status	Fuel Pump Control Module Actions
0-15%	Invalid off duty cycle	The fuel pump control module sends a 20% duty cycle signal on the fuel pump monitor (FPM) circuit. The fuel pump is off.
37%	Normal low speed operation.	The fuel pump control module operates the fuel pump at the speed requested. The fuel pump control module sends a 60% duty cycle signal on FPM circuit.
47%	Normal high speed operation.	The fuel pump control module operates the fuel pump at the speed requested. The fuel pump control module sends a 60% duty cycle signal on FPM circuit.
51-67%	Invalid on duty cycle.	The fuel pump control module sends a 20% duty cycle signal on the FPM circuit. The fuel pump is off.
67-83%	Valid off duty cycle	The fuel pump control module sends a 60% duty cycle signal on FPM circuit. The fuel pump is off.
83-100%	Invalid on duty cycle.	The fuel pump control module sends a 20% duty cycle signal on the FPM circuit. The fuel pump is off.

The fuel pump control module communicates diagnostic information to the PCM through the FPM circuit. This information is sent by the fuel pump control module as a duty cycle signal. The 4 duty cycle signals that may be sent are listed in the following table.

FUEL PUMP CONTROL MODULE DUTY CYCLE SIGNALS

Duty Cycle	Comments
20%	This duty cycle indicates the fuel pump control module is receiving an invalid duty cycle from the PCM.
40%	For vehicles with event notification signal, this duty cycle indicates the fuel pump control module is receiving an invalid event notification signal from the RCM. For vehicles without event notification signal, this duty cycle indicates the fuel pump control module is functioning normally.
60%	For vehicles with event notification signal, this duty cycle indicates the fuel pump control module is functioning normally.
80%	This duty cycle indicates the fuel pump control module is detecting a concern with the secondary circuits.

MRFS Check Operation:

DTCs	P025A – Fuel Pump Control Circuit (opens/shorts) P025B – Invalid Fuel Pump Control Data (20% duty cycle from FPM) P0627 – Fuel Pump Secondary Circuit (80% duty cycle from PFM) U2010B – Fuel Pump Disabled Circuit (40% duty cycle from FPM) U0109 – Loss of Communication with Fuel Pump Module
Monitor execution	once per driving cycle
Monitor Sequence	None
Sensors OK	
Monitoring Duration	2 seconds

Typical MRFS check entry conditions:

Entry Condition	Minimum	Maximum
Battery Voltage	11 volts	

Typical MRFS check malfunction thresholds:

P025A
FP output driver indicates fault
P025B, P0627, U210B
Fuel Pump Monitor duty cycle feedback of 20, 40 or 80%
U0191
No Fuel Pump Monitor duty cycle feedback


Battery and Battery Charging Systems

Low Voltage Battery Charging System - Overview

The 12V battery is charged by the Direct Current/Direct Current (DC/DC) converter control module. It is enabled when the high voltage battery contactors have closed, providing high-voltage power to the DC/DC converter control module.

The Battery Monitoring Sensor continuously monitors the battery state of charge condition and provides the BCM with this information. The BCM communicates this information to the PCM over the High Speed CAN network (HS-CAN). The PCM communicates the battery desired set point to the DC/DC converter control module which supplies the necessary charge voltage to the 12V battery. The Battery Monitoring Sensor also estimates losses in the battery capacity over time. The Battery Monitoring Sensor should only be reset when the battery is replaced.

The Battery Monitoring Sensor is clamped directly to the negative terminal of the battery and grounds to the vehicle at the chassis ground connection point through the negative battery cable and eyelet. It is part of the negative battery cable and cannot be serviced separately.

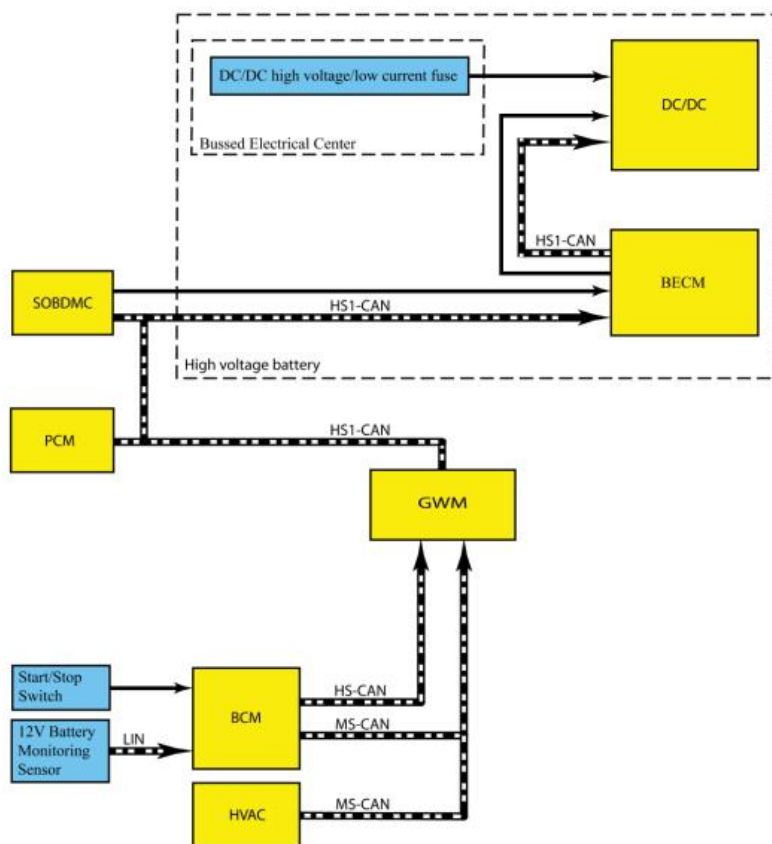

E155478

The PCM monitors the low voltage battery for charging performance.

Low Voltage Battery Check Operation:	
DTCs	P057F - Battery State of Charge Performance.
Monitor execution	During vehicle / engine off while on plug-in charge
Monitor Sequence	None
Sensors OK	
Monitoring Duration	

Low Voltage Battery check malfunction thresholds:
Low Voltage Battery current / time > 6 amps / 60 min
Low Voltage Battery temperature gradient too high, gradient counter > 3
Low Voltage Battery temperature.> 140 deg F


High Voltage Battery Charging System - Overview

The high voltage battery charging system is responsible for charging the high voltage battery while the vehicle is not operating. It consists of an Electric Vehicle Supply Equipment (EVSE), Secondary OBD Module (also known as the Battery Changer Control Module and Charge Port Light Ring (CPLR).

The EVSE is an external AC charger that connects to an external voltage source and the vehicle charge port when the vehicle is not operating to charge the high voltage battery. The 110V (AC Level 1) charger and cord set plugs into a standard 110V AC outlet and comes with the vehicle when purchased. The 110V charger is rated up to 12 amps or up to 16 amps depending on the household receptacle being used. It is recommended to use a dedicated 110V electrical outlet to ensure adequate current supply for charging. A 220V (AC Level 2) charging station can also be utilized which is rated up to 80 amps.

The SOBDM, also known as the Battery Charger Control Module (BCCM), is an air-cooled component that charges both the high voltage battery and the low voltage (12V) battery when the vehicle is not operating and plugged into a (110V or 220V) EVSE. The SOBDM is known as the on-board charger. Its primary function is to coordinate charging operations and convert AC to DC. The SOBDM incorporates an integrated module that communicates with other modules over the HS-CAN, and is located inside the high voltage battery pack electronics compartment.

When the EVSE is plugged into the vehicle charging port, the CPLR indicates the current Customer State-of-Charge (CSoC) and charging operations of the high voltage battery. The CPLR is a light ring surrounding the charge port inlet that displays charging, charging faults and charging status using four LED light segments.

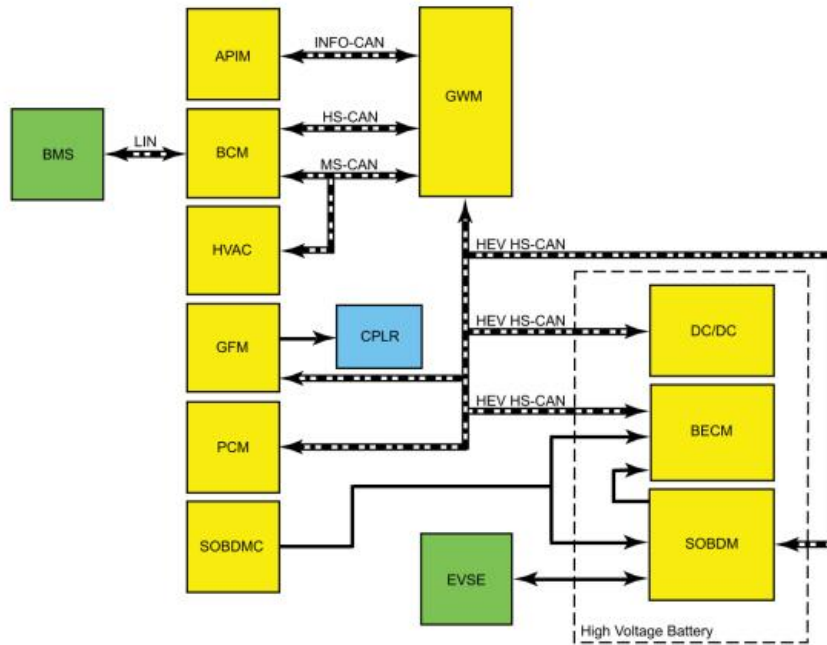

E159759

The SOBDM, also known as the BCCM (Battery Charger Control Module), charges the high voltage battery and has an internal DC to DC Converter Control Module to maintain the 12V battery while vehicle is plugged into an external 110V or 220V AC EVSE. The SOBDM is an air-cooled component that converts an input voltage of (120 or 240 volts) AC to high-voltage DC and low-voltage DC power, while maintaining electrical isolation between the systems. When plugged into an external power source the SOBDM is enabled and charges the high voltage battery (168-361 volts) and the low-voltage battery (12-15 volts). The SOBDM steps the high-voltage down to a low-voltage (between 12 and 15 volts, depending on vehicle needs), providing power to charge the vehicle low-voltage battery. During charge the SOBDM incorporates an internal DC/DC converter to charge the low-voltage battery directly.

When the EVSE cord is plugged in the SOBDM wakes up by sensing a control pilot signal. The pilot signal duty cycle is analyzed to determine AC line capacity and the frequency is monitored to make sure it is in the proper range. The EVSE monitors the pilot signal to determine when to turn on AC output. A separate proximity circuit signal is analyzed to confirm if the connection is stable and the S3 button on the external charger cord is released. If both signals are in correct range, the SOBDM transmits an on-plug message via HEV HS-CAN. The SOBDM confirms the gear position is in park and that the vehicle is not in torque producing mode via HEV HS-CAN and closes an internal S2 switch signaling the EVSE to send AC voltage to the SOBDM. The high voltage system does not charge if the gear position is is not in park or if the vehicle is started.

Switch S2 detection is determined by the pilot signal voltage change. If the AC voltage input is within range the SOBDM enables 12V battery charging and wakes up the BECM. While waiting to enter high voltage charging state, the SOBDM sets low voltage output to a minimum of 12.6V until it receives a low-voltage setpoint from the PCM via HEV HS-CAN. The SOBDM is ready for high voltage power conversion when it transmits a charger-ready message via the HEV HS-CAN.

The SOBDM internally transitions from a ready state to charging state of the high voltage battery upon receipt of a battery charge ready or charging message from the BECM via the HEV HS-CAN. When the BECM status goes from a charge ready to a charging state the charge contactors are closed to begin charging the high voltage battery. The SOBDM limits the voltage and current to the high voltage battery based on the maximum voltage and

current requests from the BECM via the HEV HS-CAN. The SOBDM transmits high voltage and current output internal measurements to the BECM via the HEV HS-CAN.

During high voltage charging the BECM commands the outside air (OSA) duct mode door actuator to open. This allows outside air to be pulled into the High Voltage Battery pack to cool SOBDM. The BECM monitors the mode door position and motor circuits and sets a DTC if a fault is detected. The SOBDM monitors its internal temperature and commands the charger cooling fan speed accordingly to prevent overheating. When high-voltage charging is complete the BECM charging state HEV HS-CAN message switches from charging to charging complete and opens the high voltage charge contactors. The SOBDM continues to charge the 12V battery while AC input is present except when commanded off by the SOBDMC.

During high 12V electrical loads or if the ignition is turned on while the vehicle is plugged in the main DC to DC Converter Control Module is enabled to charge the 12V battery. If this occurs, the SOBDM disables its low-voltage support and no longer charges the 12V battery. However, it continues charging the high voltage battery. The SOBDM shuts down if the PCM no longer requests low-voltage support and the BECM status is charge complete.

If the release button (S3) on the EVSE is pressed while low-voltage or high-voltage charging is in progress, the SOBDM detects a change of proximity circuit voltage. The high-voltage and the low-voltage DC charging simultaneously stops. The SOBDM disables power conversion and opens the internal S2 switch. When the EVSE detects an open S2 switch by sensing a pilot signal voltage change, it drops the AC voltage output to zero so the charger cord can be safely removed. This prevents arcing of the charge port terminals when the EVSE cord is disconnected.

The CPLR displays the current CSoC and charging operations of the high voltage battery. When plugged into an external power source (120 or 240 volts), the CPLR activates the light ring around the charge inlet port and performs a cord acknowledgment. If successful, this sequence flashes one light segment one at a time in order. The segments shut off and this sequence repeats 2 times. The CPLR displays charging, charging faults, and charging status. The light ring is segmented into 4 equal LEDs, each indicating the state of charge: • One segment flashing < 25% charged • One segment lit (one segment flashing) > 25% charged • Two segments lit (one segment flashing) > 50% charged • Three segments lit (one segment flashing) > 75% charged. A flashing ring segment indicates a charge is in progress. When all four rings are solidly lit, the charging operation is complete. If less than four rings are lit solid charging is not ready. When the charge is complete an internal timer starts to do a 3-5 minute shutoff to turn the LEDs off and put the module to sleep. The LEDs remain off until a Puddle Light Activation command is sent via the key fob or door handle. If there is a fault, all LED segments flash rapidly for no more than 5 minutes before going to sleep. LEDs illumination varies depending if it is daytime or nighttime.

To remove the EVSE cord press the release button to stop the charging process. All the LEDs shut off indicating it is safe to unplug the cord. There is a customer preference setting in the APIM to customize the operation of the CPLR. The options available include: 1. LEDs On (normal operation) 2. LEDs Off except for Cord Acknowledgements and Puddle Light Activation requests, 3. LEDs Off (this setting prevents LED operation for any reason).

Battery Charge Control Module Performance Check Operation:

DTCs	P0D24 - Battery Charger Temperature Too High P0562 - System Voltage Low P0DAA - Battery Charging System Isolation Fault
Monitor execution	Charger active, on-plug, connected to EVSE and charging
Monitor Sequence	None
Sensors OK	
Monitoring Duration	60 sec

Battery Charge Control Module Performance malfunction thresholds:

P0D24 - Internal temperature too high

P0562 - < 10.5V DC for 60 sec measured at charger B+ terminal

P0DAA - The measured leakage voltage is used to calculate the resistance between each high voltage bus and chassis < 41 kohm when charge contactors are closed.

Battery Charge Control Module Functional Check Operation:

DTCs	P0D59 - Proximity Detection Circuit High. P0D80 - Battery Charger Input Circuit/Open.
Monitor execution	P0D59: Charger is ON, PSR applied or active EVSE connected P0D80: On-Plug, EVSE active. connected to EVSE , and S2 closed
Monitor Sequence	None
Sensors OK	
Monitoring Duration	60 sec

Battery Charge Control Module Functional malfunction thresholds:

P0D59 - EVSE proximity circuit detected open. Proximity circuit detected >4.8V DC for 5 seconds.

P0D80 – A/C Utility input not present after EVSE S2 switch closed. A/C Input voltage < 85 VAC for 30 seconds.

Battery Charge Control Module Performance Check Operation:

DTCs	P0D67 - Battery Charger Control Module Performance.
Monitor execution	Charger active; connected to EVSE, S2 closed, and utility A/C is present to charger input
Monitor Sequence	None
Sensors OK	
Monitoring Duration	60 sec

Battery Charge Control Module Performance malfunction thresholds:

Internal on-board charger module fault detected that prevents charging functionality. Failure conditions include:

Low Voltage circuit overvoltage, High Voltage circuit overvoltage, PFC failure, High Voltage circuit voltage or current control circuit fault, High Voltage circuit current sensor failure.

Battery Charging System Contactor Check Operation:

DTCs	P0D0F - Battery Charging System Negative Contactor Stuck Closed P0D09 - Battery Charging System Positive Contactor Stuck Open
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1sec

Battery Charging System Contactor malfunction thresholds:

P0D0F - Negative charge contactor status remains closed. Contactor measurement voltage reported over CAN to the BECM is \geq (pack voltage - 20v) When charge negative contactor is being commanded from close to open.

P0D09 - Charge positive contactor reported charger voltage over CAN to the BECM is $> \pm 5\%$ of Pack voltage AND the reported charger current over CAN to the BECM is < 0.5 amps AND both charge contactors are commanded closed AND both charge contactors have power when charge positive contactor is closed.

Battery Charging System Contactor Check Operation:

DTCs	P0D0A - Battery Charging System Positive Contactor Control Circuit/Open P0D0D - Battery Charging System Positive Contactor Control Circuit High P0D0B - Battery Charging System Positive Contactor Control Circuit Range/Performance P0D14 - Battery Charging System Negative Contactor Control Circuit High
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1sec

Battery Charging System Contactor malfunction thresholds:

P0D0A - Charge positive contactor reported charger voltage over CAN to the BECM is > +/- 5% of Pack voltage AND the reported charger current over CAN to the BECM is < 0.5 amps AND both charge contactors are commanded closed AND one or both charge contactors DO NOT have power when charge positive contactor is closed.

P0D0D - Charge positive contactor low side driver in limited current mode.

P0D0B - Charge contactor high side driver in overcurrent mode when any charge contactor is closed.

P0D14 - Charge negative contactor low side driver in limited current mode.

High Voltage Battery - Overview

The plug in hybrid can be used as an electric vehicle, conventional hybrid vehicle, or both. The high voltage battery on the plug in hybrid application has more capacity than a full hybrid application and can be fully charged using EVSE (Electric Vehicle Supply Equipment) connected to the vehicle charge port. An EV button is located on the steering wheel to change the vehicle operating strategy.


The vehicle can be placed in electric mode only (EV NOW) allowing only the electric motor to propel the vehicle. In this mode the high voltage battery depletes and the gas engine does not operate unless a calibratable condition exists such as a malfunction, heavy acceleration, high electric motor temperature, elevated high voltage battery temperature, low high voltage battery state of charge, or certain climate control functions are selected (e.g. defrost).

The high-voltage system utilizes approximately 300 volts DC, provided through high-voltage cables to its components and modules. The high-voltage cables and wiring are identified by orange harness tape or orange wire covering. All high-voltage components are marked with high-voltage warning labels with a high-voltage symbol.

The high voltage battery pack consists of the following components:

- High voltage battery service disconnect
- High voltage battery RH and LH cooling inlet ducts
- High voltage battery cooling fan and air outlet duct
- High voltage battery inlet air temperature sensor
- SOBDM/BCCM (Battery Charger Control Module)
- SOBDM outside air duct
- SOBDM cooling fan
- BECEM (Battery Energy Control Module)
- DC/DC (Direct Current/Direct Current) converter control module
- High voltage battery junction box
- High voltage low current fuse (x3)
- High voltage high current fuse
- High voltage battery cell array cover (not serviceable)
- High voltage battery cell arrays (not serviceable)
- High voltage battery wiring harness (not serviceable)

The high voltage battery cell array cover, high voltage battery cell arrays, and high voltage battery wiring harness are serviced as part of the entire high voltage battery pack.

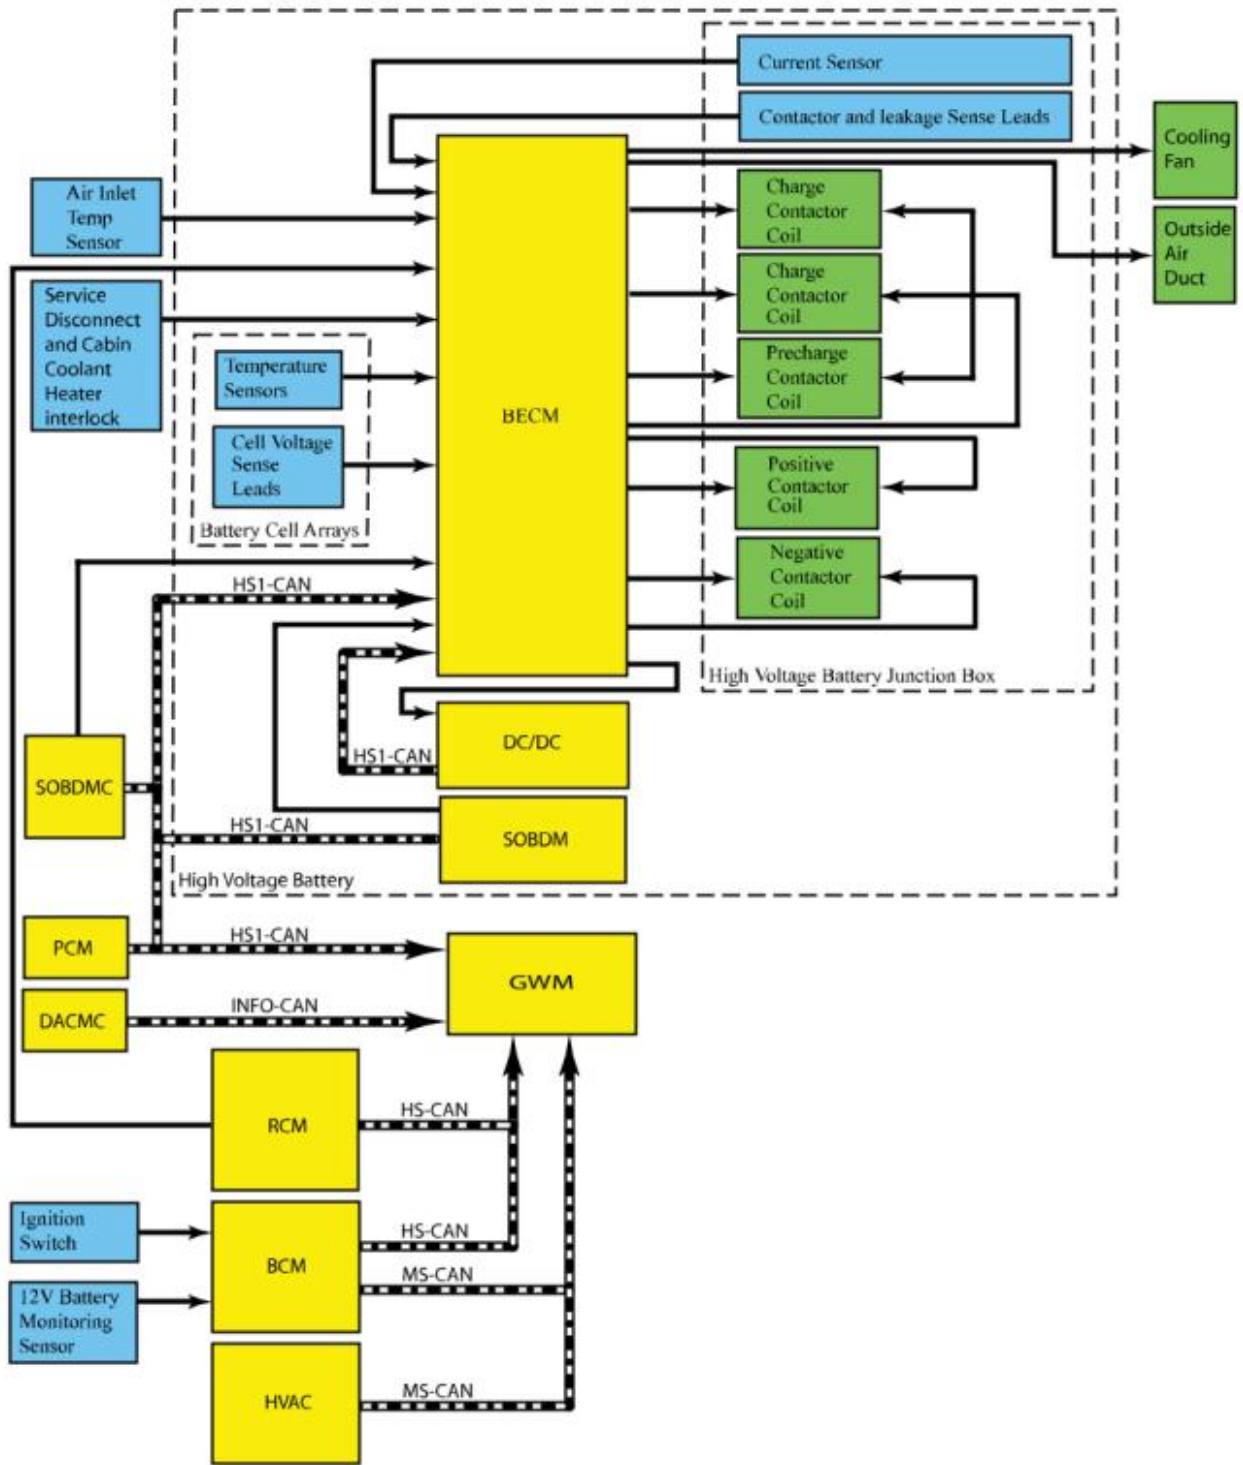

E160358

Battery Energy Control Module Performance Check Operation:

DTCs	U0300 - Internal Control Module Software Incompatibility U019B - Lost Communication With Battery Charger Control Module U3012 - Control Module Improper Wake-up Performance B11D5 - Restraints Event - Vehicle Disabled P0AA6 - Hybrid/EV Battery Voltage System Isolation Fault
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Battery Energy Control Module Performance malfunction thresholds:

U0300 - HW version and SW version not compatible

U019B - BCCM CAN message missing for 5 sec

U3012 - Power Sustain Relay Voltage ≤ 5.225 V or Contactor Open Request Not Received. Contactors are latched open due to LOW PSR but HPCM still requests contactors closed.

B11D5 - CAN signal from the Restraints Control Module indicates restraints event (crash) occurred.

P0AA6 - Leakage resistance < 195 kohm when charge contactors are closed.

Battery Pack Current Sensor Check Operation:

DTCs	P0AC1 - Hybrid/EV Battery Pack Current Sensor "A" Circuit Low P0AC2 - Hybrid/EV Battery Pack Current Sensor "A" Circuit High P0AC0 - Hybrid/EV Battery Pack Current Sensor "A" Circuit Range/Performance P0AC3 - Hybrid/EV Battery Pack Current Sensor "A" Circuit Intermittent/Erratic
Monitor execution	P0AC0: At a power up before contactors are closed All others: continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Battery Pack Current Sensor malfunction thresholds:

P0AC1 – Battery current ≤ 293.75 A

P0AC2 – Battery current ≥ 293.75 A

P0AC0 – Battery current ≤ 3 A or ≥ 3 A at power up before contactors are closed

P0AC3 – Battery current reference voltage > 5.5V or < 4.5 V

Battery Pack Sensor Check Operation:

DTCs	P0AA7 - Hybrid/EV Battery Voltage Isolation Sensor Circuit P1A3A - Hybrid/EV Battery Pack Voltage Sense System - Multiple Sensor Correlation P1A39 - Hybrid/EV Battery Temperature Sensor System - Multiple Sensor Correlation
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Battery Pack Sensor malfunction thresholds:

P0AA7 - The estimated pack voltage derived from the sum of the positive and negative leakage voltage is not ≤ 22.3982 v of the actual measured pack voltage

P1A3A - Pack voltage > 390 V, or $< 1/2$ of sum of cell voltages, and Half pack voltage < 35 V, or > 200 V

P1A39 - 3 or more temperature sensor faults (there are 10 sensors total) > 95 deg C, or < -50 deg C, or
| Any temp sensor - average of all temp sensors | > 25 deg C."

Battery Pack Performance Check Operation:

DTCs	P0B24 - Hybrid/EV Battery "A" Voltage Unstable P0C30 - Hybrid/EV Battery Pack State of Charge High P0AFB - Hybrid/EV Battery System Voltage High P0B25 - Hybrid/EV Battery "A" Voltage Low P0D37 - Hybrid/EV Battery System Current High P0A7F - Hybrid/EV Battery Pack Deterioration
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 15 seconds

Battery Pack Performance malfunction thresholds:

P0B24 - Average cell voltage minus any cell voltage > 0.5 volts for 15 sec

P0C30 -

- State of charge => 100% when charge contactors are open (main contactors open or closed)
- Cell voltage > 4.5V when charge contactors are open (main contactors open or closed)
- State for charge => 101% when charge contactors are closed
- Cell voltage > 4.14 V when charge contactors are closed

P0AFB – Pack voltage > 362 V

P0B25 – State of change = 0% with main contactors open or closed

P0D37 – Battery current > 180 A for 200 sec, or > 250 A for 60 sec.

P0A7F – Battery pack power < 12 KW

Battery Pack Cell Balance Circuit Check Operation:

DTCs	<p>P0DAD - Hybrid/EV Battery Cell Balancing Circuit "A" Stuck On. P0DB1 - Hybrid/EV Battery Cell Balancing Circuit "B" Stuck On. P0DB5 - Hybrid/EV Battery Cell Balancing Circuit "C" Stuck On. P0DB9 - Hybrid/EV Battery Cell Balancing Circuit "D" Stuck On. P0DBD - Hybrid/EV Battery Cell Balancing Circuit "E" Stuck On. P0DC1 - Hybrid/EV Battery Cell Balancing Circuit "F" Stuck On. P0DC5 - Hybrid/EV Battery Cell Balancing Circuit "G" Stuck On. P0DC9 - Hybrid/EV Battery Cell Balancing Circuit "H" Stuck On. P0DCD - Hybrid/EV Battery Cell Balancing Circuit "I" Stuck On. P0DD1 - Hybrid/EV Battery Cell Balancing Circuit "J" Stuck On. P0DD5 - Hybrid/EV Battery Cell Balancing Circuit "K" Stuck On. P0DD9 - Hybrid/EV Battery Cell Balancing Circuit "L" Stuck On. P0DDD - Hybrid/EV Battery Cell Balancing Circuit "M" Stuck On. P0DE1 - Hybrid/EV Battery Cell Balancing Circuit "N" Stuck On. P0DAE - Hybrid/EV Battery Cell Balancing Circuit "A" Stuck Off. P0DB2 - Hybrid/EV Battery Cell Balancing Circuit "B" Stuck Off. P0DB6 - Hybrid/EV Battery Cell Balancing Circuit "C" Stuck Off. P0DBA. Hybrid/EV Battery Cell Balancing Circuit "D" Stuck Off. P0DBE. Hybrid/EV Battery Cell Balancing Circuit "E" Stuck Off. P0DC2 - Hybrid/EV Battery Cell Balancing Circuit "F" Stuck Off. P0DC6 - Hybrid/EV Battery Cell Balancing Circuit "G" Stuck Off. P0DCA - Hybrid/EV Battery Cell Balancing Circuit "H" Stuck Off. P0DCE. Hybrid/EV Battery Cell Balancing Circuit "I" Stuck Off. P0DD2 - Hybrid/EV Battery Cell Balancing Circuit "J" Stuck Off. P0DD6 - Hybrid/EV Battery Cell Balancing Circuit "K" Stuck Off. P0DDA - Hybrid/EV Battery Cell Balancing Circuit "L" Stuck Off. P0DDE - Hybrid/EV Battery Cell Balancing Circuit "M" Stuck Off. P0DE2 - Hybrid/EV Battery Cell Balancing Circuit "N" Stuck Off.</p>
Monitor execution	At a power up before contactors are closed, and two consecutive power cycles
Monitor Sequence	None
Sensors OK	
Monitoring Duration	100 msec

Battery Pack Cell Balance Circuit Check malfunction thresholds:

For the 6 cells monitored by each circuit: Any individual cell voltage differs from the average cell voltage by > 75 mV

Battery Pack Contactor Check Operation:

DTCs	P0AA4 - Hybrid/EV Battery Negative Contactor Circuit Stuck Closed P0AA5 - Hybrid/EV Battery Negative Contactor Circuit Stuck Open P0AA2 - Hybrid/EV Battery Positive Contactor Circuit Stuck Open P0B37 - High Voltage Service Disconnect Open
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Battery Pack Contactor malfunction thresholds:

P0AA4 - Negative contactor status remains closed.

- Negative Contactor Measurement is > 90% Negative Half Pack voltage AND
- Negative Contactor Measurement is < 110% Negative Half Pack voltage AND
- Negative Contactor Measurement is > 30 volts.

P0AA5 - Negative contactor is commanded closed AND there is power to the contactor AND the contactor state is determined open.

Open is defined as NOT closed (i.e. mutually exclusive). Closed is defined above:

P0AA2 - Positive contactor is commanded closed AND there is power to the contactor AND the contactor state is determined open.

Open is defined as NOT closed (i.e. mutually exclusive). Closed is defined as:

- Negative Contactor Measurement is > 90% Negative Half Pack voltage AND
- Positive Contactor Measurement is < 110% Positive Half Pack voltage AND
- Positive Contactor Measurement is > 30 volts

P0B37 - The interlock and disconnect are mechanically interconnected such that removing the disconnect opens the interlock. Interlock status is reported open for the following criteria: PSR OR Charge wakeup is High, ACL latch is reported tripped by low level driver and interlock is reported open by low level driver. (ACL is anti-chatter latch).

Battery Pack Contactor Check Operation:

DTCs	P0ADD - Hybrid/EV Battery Negative Contactor Control Circuit/Open P0AE0 - Hybrid/EV Battery Negative Contactor Control Circuit High P0AD9 - Hybrid/EV Battery Positive Contactor Control Circuit/Open P0ADC - Hybrid/EV Battery Positive Contactor Control Circuit High P0ADA - Hybrid/EV Battery Positive Contactor Control Circuit Range/Performance.
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Battery Pack Contactor malfunction thresholds:

P0ADD - battery interlock is normal AND PSR or Charge Wakeup is High AND Negative Contactor state is open AND one of the following is TRUE when negative contactor is closed:

- 1.) completed the power up sequence and contactors are commanded closed but no power
- 2.) pre-charge is NOT yet complete and contactors are commanded closed but no power.

P0AE0 - Negative contactor low side driver in limited current mode.

P0AD9 - battery interlock is normal AND PSR or Charge Wakeup is High AND Positive Contactor state is open AND one of the following is TRUE when positive contactor is closed:

- 1.) completed the power up sequence and contactors are commanded closed but no power
- 2.) pre-charge is NOT yet complete and contactors are commanded closed but no power.

P0ADC - Positive contactor low side driver in limited current mode.

P0ADA – Positive contactor high side driver in over current mode.

Battery Pack Precharge Contactor Check Operation:

DTCs	P0AE1 - Hybrid/EV Battery Precharge Contactor Circuit P0AE7 - Hybrid/EV Battery Precharge Contactor Control Circuit High P0AE5 - Hybrid/EV Battery Precharge Contactor Control Circuit Range/Performance
Monitor execution	
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Battery Pack Precharge Contactor malfunction thresholds:

P0AE1 - Battery current < -10A or > -10A when precharge contactor is commanded closed

P0AE7 - Precharge contactor lowside driver in limited current mode

P0AE5 - | Pack voltage - sum of contactor voltages | > 20V when precharge contactor is commanded closed.


Powersplit Transaxle

Transmission Control System Architecture

The primary function of the Powersplit transaxle is to manage torque between the electric motors, engine, and driveline. The planetary gear set provides series, parallel and split paths for power distribution from the battery and engine. The torque ratio between the series path and the parallel path is fixed by the geometry of the planetary gear set. The power split between the series path and the parallel path is determined by the relative speeds (all series if vehicle speed is zero and engine is on; all parallel if generator is stopped; split otherwise)

The system behavior is similar to a CVT with the effective gear ratio between the engine and the wheels is determined by the split.

The transaxle is controlled directly by the Hybrid Powertrain Control Module (HPCM). The HPCM communicates to the Engine Control Module (ECM), ABS Module, Battery Energy Control Module (BECM), and Body Control Module (BCM) using the high speed CAN communication link. The HPCM incorporates a standalone OBD-II system. The HPCM independently processes and stores fault codes, freeze frame, supports industry-standard PIDs as well as J1979 Mode 09 CALID and CVN. The HPCM does not directly illuminate the MIL, but requests the ECM to do so. The HPCM is located inside the Inverter System Controller (ISC) which also houses the motor and generator power electronics and the Variable Voltage Controller (VVC) hardware. It is not internally serviceable with the exception of reprogramming.

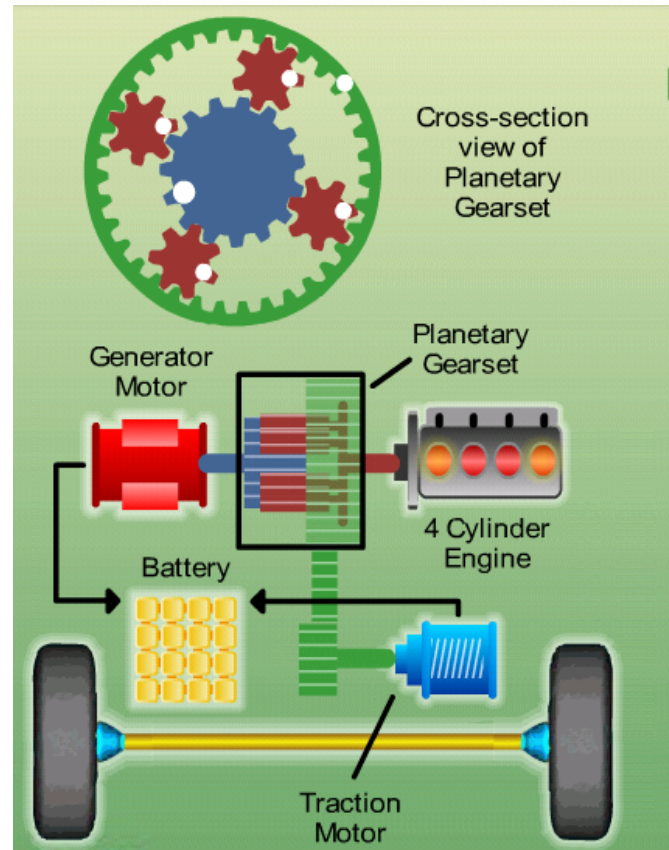

Transmission Inputs

Rotor Position Sensors

A Rotor position sensor (resolver) is located on both the electric Motor and Generator and is used to detect the angular position of the rotor. The analog waveform generated by the resolver is converted into a digital signal by the Resolver to Digital (R/D) converter. The digital signal is used to calculate speed and angular acceleration which is used to control the electric Motor and Generator. The speed information is also used to calculate vehicle speed and is broadcasted to other modules over CAN. If a resolver hardware or wiring fault is detected, or a failure with the R/D converter is detected, a P0A90-xx fault for the motor or a P0A92-xx fault for the generator will be stored. If the resolver was not properly configured (initialized) by the assembly plant or if the ISC is replaced, a P0A3F-55 will be stored for the motor, or P0A4B-55 will be stored for the generator.

Temperature Sensors

The Transmission Fluid Temperature Sensor (TFT) is monitored for open and short circuit faults and for in-range faults (P0710-xx) where Trans Fluid, Motor Coil and Generator Coil temperatures do not correlate properly.

The Motor and Generator Coil Temperature Sensors are monitored for open and short circuit faults and for in-range faults where Trans Fluid, Motor Coil and Generator Coil temperatures do not correlate properly. P0A2A-xx

and P0A2B-xx are related to Motor Coil Sensor failure, P0A36-xx and P0A37-xx are related to Generator Coil Sensor failure. The Motor and Generator coils are also monitored for over-temperature (P0A2F-94).

The Motor and Generator Inverter Temperature Sensors are monitored for open and short circuit faults. P0A78-11 and P0A78-13 are related to Motor Inverter Sensor failure, P0A7A-11 and P0A78-13 are related to Generator Inverter Sensor failure. The Motor and Generator Inverters are also monitored for over-temperature (P0A3C-94).

HPCM Outputs

Inverter Control

Upon receiving the wheel torque demanded by the driver from the ECM over CAN communication, the HPCM calculates the required torque of the electric Motor and Generator to meet driver demand. The HPCM will then control the inverter over U, V, and W phase gate signals to regulate DC current into AC current that is fed into the stator.

The Motor and Generator gate signal lines are monitored for open circuits. A P0A78-1C and P0A78-11 faults are for the Motor and a P0A7A-1C and P0A78-11 are for the Generator. The inverter is also monitored for various faults such as over current, current sensor fault, current regulation fault, temperature sensor fault, etc. and will store a P0A78 fault for the Motor and a P0A7A fault for the Generator upon detection of a malfunction.

Hybrid Powertrain Control Module (HPCM)

The HPCM monitors itself by using various software monitoring functions. The flash ROM is checked using a checksum calculation, and will set P0605-00 if ROM errors are detected. The EEPROM is emulated in the flash ROM.

The Motor/Generator Control Unit (MGCU) use similar types of RAM/ROM tests. If a fault is detected, a the MGCU will request to store P0A1B-06, P0A1B-49, P060C-41, or P060C-43 and these will be reported by the HPCM.

CAN Communications error

The HPCM receives information from the ECM (and various other modules) via CAN. If the CAN link fails, the HPCM no longer has torque or engine speed information available. The HPCM will store a U0100-00 fault code if it doesn't receive any more CAN messages from the ECM.

The HPCM receives wheel speed and brake torque request information from the Antilock Brake System (ABS) module. The HPCM will store U0121-00 fault code if communication with the ABS module is lost. The HPCM also receives information from the Battery Energy Control Module (BECM) and a U0111-00 fault will be stored if the communication with the BECM is lost.

Hybrid Powertrain Control Module

Hybrid Powertrain Control Module (HPCM) External Inputs

The HPCM monitors several hardwired inputs from the following sources:

High Voltage (HV) Interlock (HVIL) is a switched input that monitors access to the HV DC connectors. If opened, it will cause the HV circuit to be de-energized and the vehicle will be shut down.

Clean Tach Out (CTO) is a signal from the ECM, which is used to determine Engine Speed.

Electric Motor Position Sensors are used to measure the angular position of the rotor for the motor and generator.

Electric Drive Temperature Sensors are used to monitor hardware component temperatures that are critical to the electric drive system.

Electric Vehicle (EV) Mode is a driver-selectable switched input that determines the driver's request for one of the special EV driving modes (PHEV only).

High Voltage Interlock

The HV Interlock (HVIL) monitors access to the high voltage DC connectors. When the cover for the high voltage DC connectors at the ISC is removed, the HVIL circuit is opened, thus causing the HPCM to request the HV contactors to be opened and the vehicle to shutdown.

High Voltage Interlock Open Check Operation:

DTCs	P0A0A (High Voltage System Interlock Circuit)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	100 msec

High Voltage Interlock Open check entry conditions:

Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	8.0 V	-
Vehicle Speed	-	< 2 kph

High Voltage Interlock Open check malfunction thresholds:

HVIL input circuit is OPEN (0 v).

CTO (Clean Tach Out)

The CTO signal is sent from the ECM to the HPCM. The signal is sent at 10 degrees before Top Dead Center (TDC) for each cylinder. Thus, for a 4 cylinder engine, this translates into the HPCM seeing this signal every 180 degrees of engine rotation. This signal is used to calculate Engine Speed and engine rotational position.

CTO Signal Check Operation:	
DTCs	P0726 (Engine Speed Input Circuit Range/Performance Signal Compare Failure)
Monitor execution	Continuous
Monitor Sequence	None
Monitoring Duration	2000 msec

CTO Input Circuit Failure and Out- of- Range check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0 V	19.0 V
Engine Speed	50 rad/s	200 rad/s

CTO Input Circuit Out-of-Range check malfunction thresholds:
ECM Engine Speed (CAN signal) – ECM Engine Speed (based on CTO) > 50 rad/s for more than 200 msec

Electric Motor Position Sensors

These are used to measure the angular position of the rotor for the motor and generator. They are used by low-level machine control algorithms to calculate current angle. Also, they are used by higher-level control strategies to determine motor and generator rotational speeds and accelerations.

Motor/Gen Rotor Position Check Operation:	
DTCs	P0C17 (Drive Motor Position Sensor Not Learned) P0C50 (Drive Motor "A" Position Sensor Circuit "A") P0A44 (Drive Motor Position Sensor Circuit Overspeed) P0DFC (Generator Position Sensor Circuit Not Learned) P0A50 (Generator Position Sensor Circuit) P0A78 (Drive Motor Inverter Performance -- Circuit Voltage Out of Range) P0A7A (Generator Inverter Performance -- Circuit Voltage Out of Range) P0C50 (Drive Motor "A" Position Sensor Circuit "A") P0A90 (Drive Motor Performance) P0A40 (Drive Motor "A" Position Sensor Circuit Range/Performance) P0C64 (Generator Position Sensor Circuit "A") P0A92 (Hybrid Generator Performance) P0A4C (Generator Position Sensor Circuit Range/Performance)
Monitor execution	Continuous
Monitor Sequence	None
Monitoring Duration	

Motor/Gen Rotor Position Circuit Voltage Out-of-Range check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	50 msec	none
12V Battery voltage	6.0 V	19.0 V
Internal Communication Fault Check	PASS	
Gate Drive Circuit Fault Check	PASS	

Motor/Gen Rotor Position Circuit Overspeed entry conditions:		
Motor/Gen Performance General Signal Failure entry conditions:		
Motor/Gen Rotor Position Sensor Not Configured entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	700 msec	none
12V Battery voltage	6.0 V	19.0 V
Internal Communication Fault Check	PASS	

Motor/Gen Performance Circuit Voltage Below Threshold entry conditions		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	50 msec	none
12V Battery voltage	6.0 V	19.0 V

Internal Communication Fault Check	PASS	
Internal Reference Voltages Fault Check	PASS	
Gate Drive Circuit Fault Check	PASS	

Motor/Gen Performance Invalid Serial Data entry conditions:

Entry Conditions	Minimum	Maximum
Time after vehicle power up	50 msec	none
12V Battery voltage	6.0 V	19.0 V
Internal Communication Fault Check	PASS	
Mot/Gen Speed	> 0 RPM	
Mot/Gen Inverter Over Current Fault	FAIL	

Motor/Gen Rotor Position Sensor Not Configured malfunction thresholds:

Motor/Generator Resolver Position (stored in EEPROM) is not in acceptable range.

Motor/Gen Rotor Position Circuit Overspeed malfunction thresholds:

(Motor measured speed is greater than 1596 for greater than 10 msec OR
 Motor measured speed is greater than 1544 for greater than 100 msec.)
 (Generator measured speed is greater than 1596 for greater than 10 msec OR
 Generator measured speed is greater than 1544 for greater than 100 msec.)

Motor/Gen Rotor Position Circuit Voltage Out-of-Range malfunction thresholds:

Motor/Generator Gate Drive Power Supply > 15.08 V OR
 Motor/Generator Resolver Power Supply less than 4.7 V OR greater than 5.3 V

Motor/Gen Drive Motor Performance General Signal Failure malfunction thresholds:

Motor/Generator Resolver hardwired fault line indicates faulted high-> 10ms if RUNNING. OR > 600ms at powerup OR
 Motor/Generator Resolver hardwired fault line intermittent

Motor/Gen Performance Circuit Voltage Below Threshold malfunction thresholds:

Motor/Generator Resolver circuit power supply less than 15.6 V OR greater than 21.5 V

Motor/Gen Performance Invalid Serial Data malfunction thresholds:

Motor/Generator Resolver ABZ data differs from serial data by more than 3.6 deg for more than 20 msec.

Motor/Gen Performance

35A difference between command and feedback for 500ms continuously.

Electric Motor HV Current Sensors

These are used by the MGCU (Motor/Generator Control Unit) to measure the AC current for each phase of the motor and generator. They are used by low-level machine control algorithms to calculate current magnitude and angle. Also, they are used by to insure correct connection of the AC 3-phase circuits to the motor and generator.

Motor/Gen Current Sensor Check Operation:	
DTCs	P0A78 (Drive Motor Inverter Performance - Current Above Threshold) P0A7A (Generator Inverter Performance - Current Above Threshold) P0C00 Drive Motor "A" Current Low) P0C03 (Drive Motor "B" Current Low) P1A16 (Variable Voltage Controller Voltage Control Circuit - Current Above Threshold) P0D2D (Drive Motor "A" Inverter Voltage Sensor Circuit)
Monitor execution	Continuous
Monitor Sequence	None
Monitoring Duration	

Motor/Gen Inverter Performance Current Above Threshold entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	50 msec	none
12V Battery voltage	6.0 V	19.0 V
Internal Reference Voltages Fault Check	PASS	
Internal Inverter Fault Check	PASS	

Motor/Gen Inverter Performance Current Out-Of Range entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	50 msec	none
12V Battery voltage	6.0 V	19.0 V
Internal Reference Voltages Fault Check	PASS	
Mot/Gen Operating Mode	Any mode except Terminate	

Variable Voltage Controller Control Circuit Current Above Threshold entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	50 msec	none
12V Battery voltage	6.0 V	19.0 V
Internal Reference Voltages Fault Check	PASS	
VVC Operating Mode	Boost Mode	

Motor/Gen Inverter Performance Current Above Threshold malfunction thresholds:

Motor/Gen current sensor over current declared by MGCU:

Motor current magnitude > 600A for 400us OR > 30 A for 200ms at power up

Generator current magnitude > 300A for 400us OR > 15 A for 200ms at powerup

Motor/Gen Inverter Performance Current Out-Of Range malfunction thresholds:

Motor/Gen phase circuit fault declared by MGCU - < 5 A for duration of test (100ms) at power up

Variable Voltage Controller Control Circuit Current Above Threshold malfunction thresholds:

Variable Voltage Controller current measured greater than 300 amps.

Inverter DC Voltage Sensor Circuit malfunction thresholds:

< 0.235V for 100ms at power up

Electric Drive Temperature Inputs

Motor/Generator Coil Temperature Sensors

These temperature sensors are located on the coil windings of the stators of the motor and the generator.

Motor/Generator Coil Temperature Sensor check Operation:	
DTCs	P0A2C (Drive Motor "A" Temperature Sensor Circuit Low) P0A2D (Drive Motor "A" Temperature Sensor Circuit High) P0A2B (Drive Motor "A" Temperature Sensor Circuit Range/Performance) P0A2F (Drive Motor "A" Over Temperature -- Unexpected Operation) P0A38 (Generator Temperature Sensor Circuit Low) P0A39 (Generator Temperature Sensor Circuit High) P0A37 (Generator Temperature Sensor Circuit Range/Performance)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	200 msec

Motor/Generator Coil Temp Circuit Short/Open check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	2 seconds	none
12V Battery voltage	6.0 V	19.0 V
Internal Reference Voltages Fault Check	PASS	

Motor/Generator Coil Temp Over Temp check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V
Sensors OK	Motor Temp Sensor = OK Generator Temp Sensor = OK Oil Temp Sensor = OK	
Internal Reference Voltages Fault Check	PASS	

Motor/Generator Coil Temp In-Range/Performance entry conditions:

Entry Conditions	Minimum	Maximum
Time after vehicle power up	2 seconds	10 seconds
12V Battery voltage	6.0V	19.0 V
Sensors OK	Motor Temp Sensor = OK Generator Temp Sensor = OK Oil Temp Sensor = OK	
Internal Reference Voltages Fault Check	PASS	
Key-off timer	200 minutes	

Motor/Generator Coil Temp Sensor Low check malfunction thresholds:

Motor/Generator Coil Temp input voltage < 0.1 V for more than 32 msec

Motor/Generator Coil Temp Sensor High check malfunction thresholds:

Motor/Generator Coil Temp input voltage > 4.8 V for more than 32 msec

Motor/Generator Coil Temp Sensor Range/Performance check malfunction thresholds:**Motor Coil Temp (P0A2B)**

| Transmission Fluid Temperature - Generator Coil Temp | < 10 deg C AND
| Transmission Fluid Temperature - Motor Coil Temp | > 30 deg C AND
| Motor Coil Temp - Generator Coil Temp | > 30 deg C

Generator Coil Temp (P0A37)

| Transmission Fluid Temperature - Generator Coil Temp | > 30 deg C AND
| Transmission Fluid Temperature - Motor Coil Temp | < 10 deg C AND
| Motor Coil Temp - Generator Coil Temp | > 30 deg C

Motor/Generator Coil Temp Over Temp check malfunction thresholds:**Motor/Generator Coil Temp over Temp**

Motor/Generator Coil Temp > 140 deg C OR Transmission Oil Temp > 115 deg C

Transmission Fluid (Oil) Temperature Sensor

The Transmission Fluid Temperature sensor measures the temperature of the transmission fluid.

Trans Fluid Temperature check Operation:	
DTCs	P0713 (Transmission Fluid Temp Sensor Circuit High) P0712 (Transmission Fluid Temp Sensor Circuit Low) P0711 (Transmission Fluid Temp Sensor Circuit Range/Performance)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	200 msec

Trans Fluid Temp Circuit Low/High check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	0.5 seconds	
12V Battery voltage	6.0V	19.0 V
Internal Reference Voltages Fault Check	PASS	

Trans Fluid Temp Signal Range/Performance entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	2 seconds	30 seconds
12V Battery voltage	6.0V	19.0 V
Internal Reference Voltages Fault Check	PASS	
Sensors OK	Motor Temp Sensor = OK Generator Temp Sensor = OK Oil Temp Sensor = OK	
Key-off timer	200 minutes	

Trans Fluid Temp Sensor Circuit High malfunction thresholds:
Transmission Fluid Temp input voltage < 0.1 V for more than 32 msec

Trans Fluid Temp Sensor Circuit Low malfunction thresholds:
Motor Coil Temperature > 10 deg C AND Generator Coil Temperature > 10 deg C AND Transmission Fluid Temp input voltage > 4.86 V for more than 32 msec

Trans Fluid Temp Sensor Range/Performance failure check malfunction thresholds:
Transmission Fluid Temperature - Generator Coil Temp > 30 deg C AND Transmission Fluid Temperature - Motor Coil Temp > 30 deg C AND Motor Coil Temp - Generator Coil Temp < 10 deg C

Motor/Generator Inverter Temperature Sensors

These temperature sensors are located on the Motor and Generator Inverters.

Motor/Generator Inverter Temperature Check Operation:	
DTCs	P0AEF (Drive Motor Inverter Temperature Sensor "A" Circuit Low) P0AF0 (Drive Motor Inverter Temperature Sensor "A" Circuit High) P0AEE (Drive Motor Inverter Temperature Sensor "A" Circuit Range/Performance) P0A3C (Drive Motor "A" Inverter Over Temperature) P0BCE (Generator Inverter Temperature Sensor "A" Circuit Low) P0CF (Generator Inverter Temperature Sensor "A" Circuit High) P0BCD (Generator Inverter Temperature Sensor "A" Circuit Range/Performance)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	Continuous

Motor/Generator Inverter Temp Sensor Circuit Short/Open check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V
Internal Reference Voltages Fault Check	PASS	

Motor/Generator Inverter Temp Sensor Circuit Short/Open check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V
Internal Reference Voltages Fault Check	PASS	
Sensors OK	Motor Inverter Temp sensor = OK Generator Inverter Temp sensor = OK VVC IGBT Temp Sensor = OK VVC Inductor Temp Sensor = OK	

Motor/Generator Inverter Temp Sensor Short check malfunction thresholds:
Motor Inverter Temp input voltage < 0.78 V

Motor/Generator Inverter Temp Sensor Open check malfunction thresholds:
Motor Inverter Temp input voltage > 4.56 V

Motor/Generator Inverter Temp Over Temp check malfunction thresholds:
Voltage Boost Converter (VVC) IGBT temperature > 139 deg C OR Voltage Boost Converter (VVC) Inductor temperature > 159 deg C OR Generator Inverter IGBT temperature > 123 deg C OR Motor Inverter IGBT temperature > 123 deg C

Motor/Generator Temp Sensor Range/Performance failure check malfunction thresholds:

| Motor Temperature – Engine Coolant Temp | > 30 deg C AND
Engin Off Soak Time > 210 min

High Voltage DC/DC Converter

Inverter High Voltage Sensor Check Operation:	
DTCs	P1A07 - Inverter High Voltage Performance P0C79 - Drive Motor "A" Inverter Voltage Too High P0DA8 - Hybrid/EV Battery Voltage/Drive Motor "A" Inverter Voltage Correlation
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	U0111, P0D2D
Monitoring Duration	Continuous

Inverter High Voltage Sensor check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V

Inverter High Voltage Sensor check malfunction thresholds:
P1A07 - Battery voltage CAN signal < 150V for 100ms OR measured input voltage signal voltage < 150V for 100ms
P0C79 - DC bus voltage measurement voltage > 516V for 10ms.
P0DA8 - Difference between High Voltage Battery voltage sensor and inverter input voltage sensor > 60V OR difference between input/output inverter voltage sensors > 60V.

Inverter DC/DC Converter Check Operation:

DTCs	P1A16 - Variable Voltage Controller Voltage Control Circuit P1A17 - Variable Voltage Controller Processor P0A94 - DC/DC Converter Performance
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	P0560, P0562, U0111, P1A07
Monitoring Duration	Continuous

Inverter DC/DC Converter check entry conditions:

Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V

Inverter DC/DC Converter check malfunction thresholds:**P1A16:**

Input voltage sensor reading below $< 0.235V$ for 10 msec. OR

Current sensor reading > 300 Amps for 1 sec. OR

Motor/generator torque de-rate for voltage protection $> 50\%$ for 1 sec. OR

Voltage difference across Variable Voltage Converter $> 30 V$ for 100 msec. during self-test OR

Variable Voltage Controller upper switch hardware failure for >200 usec.

P1A17:

Variable Voltage Controller Gate Drive power supply $> 15.3V$, $< 0.1V$ OR

Variable Voltage Controller upper switch temperature sensor fault $> 4.55V$, $< 0.779V$ OR

Variable Voltage Controller lower switch temperature sensor fault $> 4.55V$, $< 0.779V$ OR

Variable Voltage Controller lower switch hardware failure for >200 usec

Variable Voltage Controller inductor current sensor offset $> 15A$ at power-up

Variable Voltage Controller inductor current sensor voltage $< 4.5V$ or $> 6.0V$

P0A94:

Calculated Inductor current is $> 50 A$ different from measured current in controlled operating conditions for > 4 sec.

Inverter Inductor Temperature Sensor Check Operation:

DTCs	P1A18 - Variable Voltage Controller Inductor Temperature Sensor Circuit P1A19 - Variable Voltage Controller Driver Temperature Sensor Circuit
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	P0560, P2610
Monitoring Duration	Continuous

Inverter Inductor Temperature Sensor check entry conditions:

Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V

Inverter Inductor Temperature Sensor check malfunction thresholds:

P1A18:

Inductor temperature sensor voltage < 0.067V, > 4.86V OR

Inductor Overtemperature conditions > 165 deg C for 1 sec OR

Inductor temperature differs from ECT > 30 deg C after a 180 min engine off soak time.

P1A19:

Power Electronics temperature differs from ECT > 30 deg C after a 180 min engine off soak time.

EV Mode Input Switch (PHEV only)

Electric Vehicle (EV) Mode is driver-selectable switched input that determines the driver's request for one of the three EV driving modes: **Auto** – this is normal PHEV operation (charge depleting) which attempts to minimize use of internal combustion engine operation until PHEV battery is mostly depleted then reverts to conventional hybrid (charge sustaining) operation, **EV Now** – this mode forces the internal combustion engine off under all non-faulted driving conditions, and **EV Later** – this mode forces the vehicle into conventional hybrid (charge sustaining) to allow a reserve of battery energy to be used later once driver selects Auto mode again.

EV (transmission) Mode Check Operation:	
DTCs	P071A (Transmission Mode Switch "A" Circuit -- intermittent) P071B (Transmission Mode Switch "A" Circuit Low)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	Continuous

EV (transmission) Mode Check Circuit check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V

EV (transmission) Mode Check Circuit intermittent check malfunction thresholds:
EV Switch transitions low to high more than 10 times in 300 msec.

EV (transmission) Mode Check Circuit Low malfunction thresholds:
EV Switch input remains low for more than 30 seconds.

Transmission Range Sensor Inputs

Transmission Range Sensor Check Operation:	
DTCs	P2800 – Transmission Range Sensor B Circuit (PRNDL input) P2806 – Transmission Range Sensor Alignment
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

Transmission range sensor check malfunction thresholds:					
TR Sensor	Park	Reverse	Neutral	Drive	Low
TR_A1 (VOLTS)	3.84 - 4.77	2.58 - 3.31	1.82 - 2.56	0.97 - 1.79	0.20 - 0.92
TR_A2 (VOLTS)	0.20 - 1.08	1.56 - 2.25	2.26 - 2.96	2.97 - 3.74	3.77 - 4.45

Transmission range sensor check malfunction thresholds:
P20800: INVALID gear position signal received over CAN from ECM.
P2806: Mechanical Parking Pawl failure. Motor rotates > 9 radians when parking pawl is expected to be engaged in transaxle.

Transmission Auxiliary Oil Pump

Transmission Auxiliary Oil Pump Check Operation:	
DTCs	P175A - Transmission Fluid Over Temperature Condition - Electric Transmission Fluid Pump Disabled P0B0D - Electric/Auxiliary Transmission Fluid Pump Motor Control Module P0C27 - Electric/Auxiliary Transmission Fluid Pump "A" Motor Current Low P0C28 - Electric/Auxiliary Transmission Fluid Pump "A" Motor Current High P0C29 - Electric/Auxiliary Transmission Fluid Pump "A" Driver Circuit Performance P0C2A - Electric/Auxiliary Transmission Fluid Pump "A" Motor Stalled P0C2C - Electric Transmission Fluid Pump Control Module Feedback Signal Range/Performance P0C2D - Electric Transmission Fluid Pump Control Module Feedback Signal Low P0C2E - Electric Transmission Fluid Pump Control Module Feedback Signal High P2796 - Electric Transmission Fluid Pump Control Circuit
Monitor execution	continuous
Monitor Sequence	None
Sensors OK	not applicable
Monitoring Duration	< 1 seconds to register a malfunction

Transmission Auxiliary Oil Pump check entry conditions:		
Entry Conditions	Minimum	Maximum
Ambient Temperature	10 deg C	
12V Battery voltage	6.0V	19.0 V

Transmission Auxiliary Oil Pump check malfunction thresholds:
P175A: TAOP circuit board temperature > 130 deg C for 3 sec.
P0B0D: TAOP speed is > 105% or < 95% of commanded speed for 3 sec
P0C27: TAOP current is < 0.5 Amps at 1000rpm to <1.2 Amps at 4000rpm. For 3 sec
P0C28: TAOP current is > 12.5 Amps for 3 sec
P0C29: TAOP current and speed meet conditions for P0B0D and either P0C27 or P0C28 for 3 sec.
P0C2A: Pump speed =0 when commanded non-zero for 3 sec, OR circuit board temp > 135 deg C OR Over-current > 12.5 Amps for > 20 sec. OR Pump supplied voltage < 6.0 Volts or > 18.0 Volts for 325 ms.
P0C2C: Duty cycle of PWM signal measured by TAOP outside the 10 defined zones of operation > 3.0 sec.
P0C2D: Duty cycle of PWM signal measured from TAOP is < 9 % duty cycle for 3 seconds.
P0C2E: Duty cycle of PWM signal measured from TAOP is > 91 % duty cycle for 3 seconds.
P2796: PWM speed command signal on the separate control circuit < 80 Hz or > 120 Hz for 3 sec.

Motor Electronics Coolant Pump Control Circuit

Motor Electronics Coolant Pump Control Circuit Check Operation:

DTCs	P0A06 (Motor Electronics Coolant Pump (MECP) Control Circuit Low) P0A07 (Motor Electronics Coolant Pump (MECP) Control Circuit High) P0C73 (Motor Electronics Coolant Pump "A" Control Performance)
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	5 sec

Motor Electronics Coolant Pump Control Circuit check entry conditions:

Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V

Motor Electronics Coolant Pump Control Circuit check malfunction thresholds:

P0A06 – MECP output driver faulted for > 5 sec

P0A07 - MECP output driver faulted (overcurrent) for > 0.25 sec

P0C73 – No communication received from pump > 9.25 sec OR communication received from pump that a confirmed fault exists > 1.25 sec OR communication received from pump outside of expected frequency/duty cycle > 1 sec.

General System Voltage Checks

General System Voltage Check Operation:	
DTCs	P0560 – System Voltage P0562 – System Voltage Low P0563 – System Voltage High P0A23 – Generator Torque Sensor Circuit Range/Performance P0A18 – Motor Torque Sensor Circuit Range/Performance P1633 - Keep Alive Power Voltage Too Low
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

General System Voltage Check entry conditions:		
Entry Conditions	Minimum	Maximum
Time after vehicle power up	500 msec	none
12V Battery voltage	6.0V	19.0 V

General System Voltage check malfunction thresholds:
<p>P0560:</p> <ul style="list-style-type: none"> 5V power supply out of range ($4.75V > x$) OR ($x > 5.25V$) 3.3V power supply out of range ($3.46V < x$) OR ($x < 3.13V$) 1.5 V power supply out of range ($1.57V < x$) OR ($x < 1.42V$)
<p>P0562:</p> <ul style="list-style-type: none"> Battery voltage when vehicle is running and in a torque producing state $< 8.2V$ KAPWR voltage out of range ($x > 19.0V$) OR ($x < 5.95V$)
<p>P0563:</p> <ul style="list-style-type: none"> Battery voltage too high $> 19.0V$
<p>P0A23:</p> <ul style="list-style-type: none"> Generator sensor reference voltage out of range $> 6V$ or $< 4.50V$ for 500ms.
<p>P0A18:</p> <ul style="list-style-type: none"> Motor current sensor reference voltage out of range $> 6V$ or $< 4.50V$ for 500ms.
<p>P1633</p> <ul style="list-style-type: none"> Voltage below 6.0V for 20 seconds, or 5 seconds during module self-test.

Internal ECU Checks

Internal ECU Check Operation:

DTCs	<p>P0600 – Serial Communication Link</p> <p>P0603 - Internal Control Module Keep Alive Memory (KAM) Error</p> <p>P0604 - Internal Control Module Random Access Memory (RAM) Error</p> <p>P0605 - Internal Control Module Read Only Memory (ROM) Error</p> <p>P0607 - Internal Control Module Read Only Memory (ROM) Error</p> <p>P060A – Internal Control Module Monitoring Processor</p> <p>P060B - Internal Control Module A/D Processing Performance</p> <p>P060C - Internal Control Module Main Processor Performance</p> <p>P0613 – TCM Processor</p> <p>P061A - Internal Control Module Torque Performance</p> <p>P06B8 - Internal Control Module Non-Volatile Random Access Memory (NVRAM) Error</p> <p>P0A1D - Hybrid/EV Powertrain Control Module "A"</p> <p>P1A08 - Generator Mode Signal</p>
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	
Monitoring Duration	< 1 sec

Internal ECU Check malfunction thresholds:

P0600 – SPI message fault (checksum/header/timing/frame)

P0603 – KAM checksum error

P0604 – RAM checksum error

P0605 – ROM checksum error

P0607 - Error detected in CPU instruction test

P060A – Error detected in Motor Control Unit (RAM/ROM/Communications/Safety Monitor)

P060B – A/D redundant check error compared with main software A/D

P060C – CAN network data errors (torque/motor speed/pedal/gear/torque)

P0613 – Processor resets, micro software mismatch, torque validity

P061A – Excess torque detected

P06B8 – NVRAM read/write failure

P0A1D - Inter-processor Serial Communication failure

P1A08 - Generator mode command invalid for Neutral Gear operation when vehicle speed < 2 kph and gear position is NEUTRAL for < 1 sec.

General Hybrid System

General System Check Operation:	
DTCs	P0A1A - Generator Control Module P0A1B - Drive Motor "A" Control Module P1920 – Engine Speed Signal P1A13 - Hybrid Powertrain Control Module - Regenerative Braking Disabled P1A1B - Brake System Control Module - Forced Engine Running U0100 - Lost Communication With ECM / PCM "A" U0121 - Lost Communication With Anti-Lock Brake System (ABS) Control Module U0164 - Lost Communication With HVAC Control Module U0300 - Internal Control Module Software Incompatibility U0401 - Invalid Data Received from ECM/PCM "A" U0412 - Invalid Data Received from Battery Energy Control Module "A" U0418 - Invalid Data Received from Brake System Control Module "A"
Monitor execution	Continuous
Monitor Sequence	None
Sensors OK	P0A23, P0A92, P0A7A, P0C64 for P0A1A P1A18, P0A90, P0A78,P0C50 for P1A1B
Monitoring Duration	Continuous

General System Check malfunction thresholds:	
<p>P0A1A - Generator Torque estimate error, difference between Generator torque estimate and command > 40Nm for 550 ms or Total Torque estimate error, difference between Total torque command and Total torque > 800Nm more than demand for > 500ms.</p> <p>P0A1B - Motor Torque Estimate Error, Difference between Motor torque estimate and command > 60Nm for 550 ms or Total Torque estimate error, Difference between Total torque command and Total torque estimate > 800Nm more than demand for > 500ms.</p> <p>P1920 - Difference between engine speed CAN signal and internal engine speed calculation > 500 rpm for 500 ms OR > 550rpm for 1000 ms.</p> <p>P1A13 - Regenerative Braking Disabled by request of Brake System Control Module due to regenerative braking system fault.</p> <p>P1A1B – Forced Engine Running by request of Brake System Control Module due to regenerative braking system fault.</p> <p>U0100 – Lost Communication with PCM > 1 sec.</p> <p>U0121 – Lost Communication with ABS module > 1 sec.</p> <p>U0164 - Lost Communication with HVAC module > 1 sec.</p> <p>U0300 - Internal HPCM monitor software version mismatch.</p> <p>U0401 - Invalid Data Received from ECM/PCM "A"</p> <p>U0412 - Invalid Data Received from Battery Energy Control Module "A"</p> <p>U0418 - Invalid Data Received from Brake System Control Module "A"</p>	

PCM On Board Diagnostic Executive

The On-Board Diagnostic (OBD) Executive is a portion of the PCM strategy that manages the diagnostic trouble codes and operating modes for all diagnostic tests. It is the "traffic cop" of the diagnostic system. The Diagnostic Executive performs the following functions:

- Sequence the OBD monitors such that when a test runs, each input that it relies upon has already been tested. For 2008 MY and beyond ISO 14229 programs, the OBD monitors are no longer sequenced by the diagnostic executive.
- Controls and co-ordinates the execution of the individual OBD system monitors: Catalyst, Misfire, EGR, O2, Fuel, AIR, EVAP and, Comprehensive Component Monitor (CCM). For 2008 MY and beyond ISO 14229 programs, the execution of the OBD monitors is no longer controlled and coordinated by the diagnostic executive.
- Stores freeze frame and "similar condition" data.
- Manages storage and erasure of Diagnostic Trouble Codes as well as MIL illumination.
- Controls and co-ordinates the execution of the On-Demand tests: Key On Engine Off (KOEO)Key On Engine Running (KOER), and the Output Test Mode (OTM). For 2008 MY and beyond ISO 14229 programs, the Output Test Mode is no longer supported by the diagnostic executive.
- Performs transitions between various states of the diagnostic and powertrain control system to minimize the effects on vehicle operation.
- Interfaces with the diagnostic test tools to provide diagnostic information (I/M readiness, various J1979 test modes) and responses to special diagnostic requests (J1979 Mode 08 and 09).
- Tracks and manages indication of the driving cycle which includes the time between two key on events that include an engine start and key off.

The diagnostic executive also controls several overall, global OBD entry conditions.

- The battery voltage must fall between 11.0 and 18.0 volts to initiate monitoring cycles.
- The engine must be started to initiate the engine started, engine running, and engine off monitoring cycles.
- The Diagnostic Executive suspends OBD monitoring when battery voltage falls below 11.0 volts.
- The Diagnostic Executive suspends monitoring of fuel-system related monitors (catalyst, misfire, evap, O2, AIR and fuel system) when fuel level falls below 15%. For 2005 MY and beyond, the execution of the fuel related OBD monitors is no longer suspended for fuel level by the diagnostic executive.

The diagnostic executive controls the setting and clearing of pending and confirmed DTCs.

- A pending DTC and freeze frame data is stored after a fault is confirmed on the first monitoring cycle. If the fault recurs on the next driving cycle, a confirmed DTC is stored, freeze frame data is updated, and the MIL is illuminated. If confirmed fault free on the next driving cycle, the pending DTC and freeze frame data is erased on the next power-up.
- For the 2005 MY and later, pending DTCs will be displayed as long as the fault is present. Note that OBD-II regulations required a complete fault-free monitoring cycle to occur before erasing a pending DTC. In practice, this means that a pending DTC is erased on the next power-up after a fault-free monitoring cycle.
- For clearing comprehensive component monitoring (CCM) pending DTCs, the specific monitor must determine that no fault is present, and a 2-hour engine off soak has occurred prior to starting the vehicle. The 2-hour soak criteria for clearing CCM confirmed and pending DTCs has been utilized since the 2000 MY. For 2008 MY and beyond ISO 14229 programs, the engine off soak is no longer used by the diagnostic executive.
- After a confirmed DTC is stored and the MIL has been illuminated, three consecutive confirmed fault-free monitoring cycles must occur before the MIL can be extinguished on the next (fourth) power-up. After 40 engine warm-ups, the DTC and freeze frame data is erased.

The diagnostic executive controls the setting and clearing of permanent DTCs.

- A permanent DTC is stored when a confirmed DTC is stored, the MIL has been illuminated, and there are not yet six permanent DTCs stored.
- After a permanent DTC is stored, three consecutive confirmed fault-free monitoring cycles must occur before the permanent DTC can be erased.
- After a permanent DTC is stored, one confirmed fault-free monitoring cycle must occur, following a DTC reset request, before the permanent DTC can be erased. For 2010MY and beyond ISO 14229 programs a driving cycle including the following criteria must also occur, following the DTC reset request, before a permanent DTC can be erased:
 - Cumulative time since engine start is greater than or equal to 600 seconds;
 - Cumulative vehicle operation at or above 25 miles per hour occurs for greater than or equal to 300 seconds (medium-duty vehicles with diesel engines certified on an engine dynamometer may use cumulative operation at or above 15% calculated load in lieu of at or above 25 miles per hour for purposes of this criteria); and
 - Continuous vehicle operation at idle (i.e., accelerator pedal released by driver and vehicle speed less than or equal to one mile per hour) for greater than or equal to 30 seconds.
- A permanent DTC can not be erased by a KAM clear (battery disconnect). Additionally, its confirmed DTC counterpart will be restored after completion of the KAM reset (battery reconnect).

Exponentially Weighted Moving Average

Exponentially Weighted Moving Averaging is a well-documented statistical data processing technique that is used to reduce the variability on an incoming stream of data. Use of EWMA does not affect the mean of the data, however, it does affect the distribution of the data. Use of EWMA serves to “filter out” data points that exhibit excessive and unusual variability and could otherwise erroneously light the MIL.

The simplified mathematical equation for EWMA implemented in software is as follows:

$$\text{New Average} = [\text{New data point} * \text{“filter constant”}] + [(1 - \text{“filter constant”}) * \text{Old Average}]$$

This equation produces an exponential response to a step-change in the input data. The “Filter Constant” determines the time constant of the response. A large filter constant (i.e. 0.90) means that 90% of the new data point is averaged in with 10% of the old average. This produces a very fast response to a step change. Conversely, a small filter constant (i.e. 0.10) means that only 10% of the new data point is averaged in with 90% of the old average. This produces a slower response to a step change.

When EWMA is applied to a monitor, the new data point is the result from the latest monitor evaluation. A new average is calculated each time the monitor is evaluated and stored in Keep Alive Memory (KAM). This normally occurs each driving cycle. The MIL is illuminated and a DTC is stored based on the New Average store in KAM.

In order to facilitate repair verification and DDV demonstration, 2 different filter constants are used. A “fast filter constant” is used after KAM is cleared or DTCs are erased and a “normal filter constant” is used for normal customer driving. The “fast filter” is used for 2 driving cycles after KAM is cleared/DTCs are erased, and then the “normal filter” is used. The “fast filter” allows for easy repair verification and monitor demonstration in 2 driving cycles, while the normal filter is used to allow up to 6 driving cycles, on average, to properly identify a malfunction and illuminate the MIL. This feature is called Fast Initial Response (FIR). The fast filter is always calibrated to 1.0 which means that the EWMA is effectively disabled because the new average is 100% of the new data point. Since the EWMA is effectively disabled, it takes two driving cycles to set the MIL. The first driving cycle with a fault will set a pending DTC; the second driving cycle will set a confirmed code and illuminate the MIL.

The other unique feature used with EWMA is called Step Change Logic (SCL). This logic detects an abrupt change from a no-fault condition to a fault condition. This is done by comparing the new data point to the EWMA old average. If the two points differ by more than a calibrated amount (i.e. the new data point is outside the normal distribution), it means that a catastrophic failure has occurred. The fast filter is then used in the same manner as for the FIR feature above. Since the EWMA is effectively disabled, it takes two driving cycles to set the MIL. The first driving cycle with a fault will set a pending DTC; the second driving cycle will set a confirmed code and illuminate the MIL. The SCL becomes active after the 4th “normal” monitoring cycle to give the EWMA a chance to stabilize.

During “normal” EWMA operation, a slower filter constant is used. The “normal filter” allows the MIL to be illuminated in 1 to 6 driving cycles. A confirmed code is set and the MIL is illuminated as soon as the EWMA crosses the malfunction threshold. There is no pending DTC because EWMA uses a 1-trip MIL.

In order to relate filter constants to driving cycles for MIL illumination, filter constants must be converted to time constants. The mathematical relationship is described below:

$$\text{Time constant} = [(1 / \text{filter constant}) - 1] * \text{evaluation period}$$

The evaluation period is a driving cycle. The time constant is the time it takes to achieve 68% of a step-change to an input. Two time constants achieve 95% of a step change input.

EWMA Examples

EWMA with FIR and SCL has been incorporated in the catalyst monitor, the Rear O2 response test and the EONV Evaporative system leak check monitor. There are 3 calibrateable parameters that determine the MIL illumination characteristics.

“Fast” filter constant (0.9999), used for 2 driving cycles after DTCs are cleared/KAM is reset (FIR) and for Step Change Logic (SCL)

“Normal” filter constant(typically 0.4),, used for all subsequent, “normal” customer driving

Number of driving cycles to use fast filter after KAM clear (normally set to 2 driving cycles)

Several examples for a typical catalyst monitor calibration are shown in the tables below. The first example does not show SCL in order to better illustrate the EWMA calculation and the 1-trip MIL.

Monitor evaluation ("new data")	EWMA Filter Calculation, "normal" filter constant set to 0.4 Malfunction threshold = .75	Weighted Average ("new average")	Driving cycle number	Action/Comment
0.15	$.15 * (0.4) + .15 * (1 - 0.4)$	0.15		normal 120K system
1.0	$1.0 * (0.4) + .15 * (1 - 0.4)$	0.49	1	large failure occurs
1.0	$1.0 * (0.4) + .49 * (1 - 0.4)$	0.69	2	
1.0	$1.0 * (0.4) + .69 * (1 - 0.4)$	0.82	3	exceeds threshold, MIL on
1.0	$1.0 * (0.4) + .82 * (1 - 0.4)$	0.89	4	MIL on
0.8	$0.8 * (0.4) + .15 * (1 - 0.4)$	0.41	1	1.5 * threshold failure
0.8	$0.8 * (0.4) + .41 * (1 - 0.4)$	0.57	2	
0.8	$0.8 * (0.4) + .57 * (1 - 0.4)$	0.66	3	
0.8	$0.8 * (0.4) + .66 * (1 - 0.4)$	0.72	4	
0.8	$0.8 * (0.4) + .72 * (1 - 0.4)$	0.75	5	equals threshold, MIL on
0.8	$0.8 * (0.4) + .75 * (1 - 0.4)$	0.77	6	MIL on
0.8	$0.8 * (0.99) + 0 * (1 - 0.99)$	0.8	1	1.5 * threshold failure after code clear, pending DTC
0.8	$0.8 * (0.99) + .8 * (1 - 0.99)$	0.8	2	MIL on (I/M Readiness set to "ready")

I/M Readiness Code

The readiness function is implemented based on the J1979 format. A battery disconnection or clearing codes using a scan tool results in the various I/M readiness bits being set to a "not-ready" condition. As each non-continuous monitor completes a full diagnostic check, the I/M readiness bit associated with that monitor is set to a "ready" condition. This may take one or two driving cycles based on whether malfunctions are detected or not. The readiness bits for comprehensive component monitoring, misfire and fuel system monitoring are considered complete once all the non-continuous monitors have been evaluated. Because the evaporative system monitor requires ambient conditions between 40 and 100 °F and BARO > 22.5 " Hg (< 8,000 ft.) to run, special logic can "bypass" the running the evap monitor for purposes of clearing the evap system I/M readiness bit due to the continued presence of these extreme conditions.

Evap bypass logic:

If the evaporative system monitor conditions are met with the exception of the 40 to 100 °F ambient temperatures or BARO range, a timer is incremented. The timer value is representative of conditions where the Evap monitor could have run (all entry conditions met except IAT and BARO) but did not run due to the presence of those extreme conditions. If the timer continuously exceeds 30 seconds during a driving cycle in which all continuous and non-continuous monitors were evaluated, the evaporative system monitor is then considered complete. If the above conditions are repeated during a second driving cycle, the I/M readiness bit for the evaporative system is set to a "ready" condition.

Catalyst Temperature Model

A catalyst temperature model is currently used for entry into the catalyst and oxygen sensor monitors. The catalyst temperature model uses various PCM parameters to infer exhaust/catalyst temperature. For the 1998 MY, the catalyst temperature model has been enhanced and incorporated into the Type A misfire monitoring logic. The model has been enhanced to include a misfire-induced exotherm prediction. This allows the model to predict catalyst temperature in the presence of misfire.

The catalyst damage misfire logic (Type A) for MIL illumination has been modified to require that both the catalyst damage misfire rate and the catalyst damage temperature is being exceeded prior to MIL illumination. This change is intended to prevent the detection of unserviceable, unrepeatable, burst misfire during cold engine start-up while ensuring that the MIL is properly illuminated for misfires that truly damage the catalyst.

Beginning with the 2007 MY, the catalyst temperature model is also used to generate the primary inputs to the CSER Monitor as described in that section of this document.

Serial Data Link MIL Illumination

The instrument cluster on some vehicles uses the CAN data link to receive and display various types of information from the PCM. For example, the engine coolant temperature information displayed on the instrument cluster comes from the same ECT sensor used by the PCM for all its internal calculations.

These same vehicles use the CAN data link to illuminate the MIL rather than a circuit, hard-wired to the PCM. The PCM periodically sends the instrument cluster a message that tells it to turn on the MIL, turn off the MIL or blink the MIL. If the instrument cluster fails to receive a message within a 5-second timeout period, the instrument cluster itself illuminates the MIL. If communication is restored, the instrument cluster turns off the MIL after 5 seconds. Due to its limited capabilities, the instrument cluster does not generate or store Diagnostic Trouble Codes.